

Electret Condenser Microphone

Date: 03/09/09

Dimensions: mm (in.)

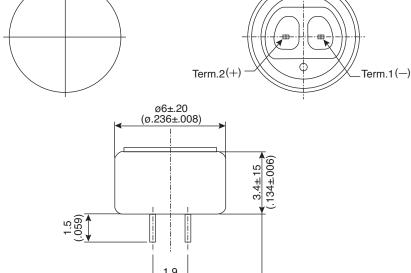

Microphone Frequency Response

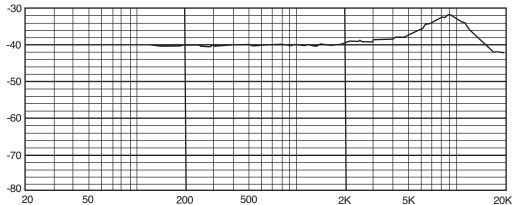

Electrical Specifications:

· Sensitivity: -40±3dB

Electret Condenser Microphone

Output Impedance: 2.2KΩ (Max)
Frequency Range: 70-20,000Hz
Standard Operation Voltage: 2.0V
Current Consumption: 0.5mA (Max)

S/N Ratio: > 58dB

Mechanical Specifications:

KT-400499

• Operating Temperature: -25~+70°C

Storage Temperature: -40~+70°C

Note:

· RoHS Compliant

Available from Mouser Electronics

www.mouser.com

(800) 346-6873