
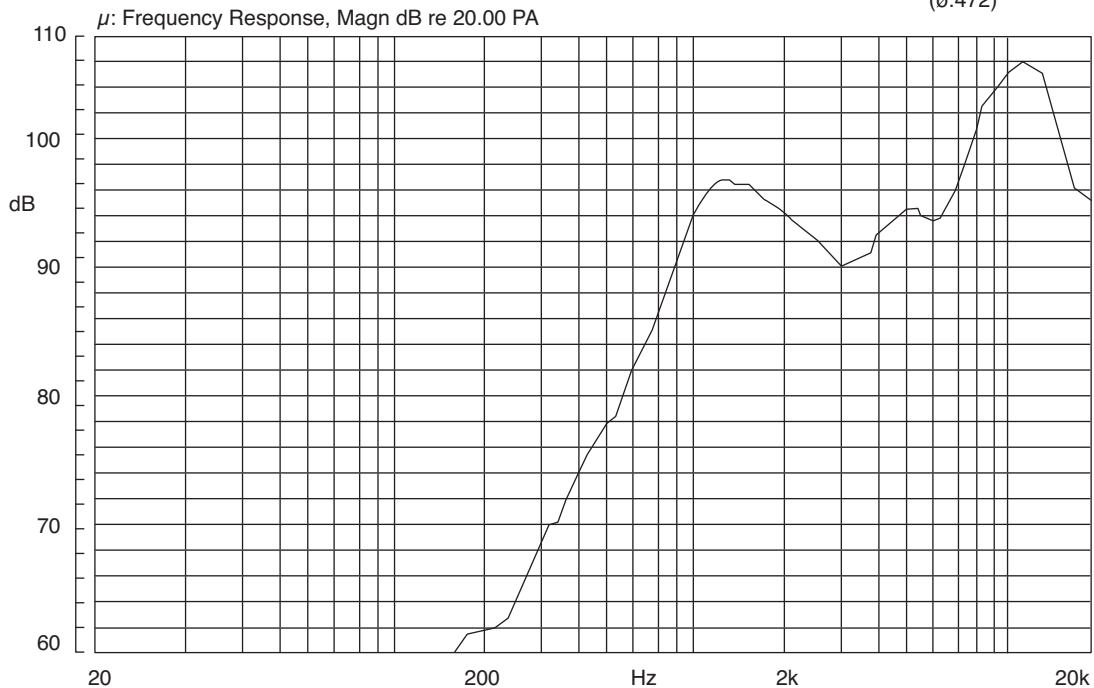


Part Number:

254-DS168-RO

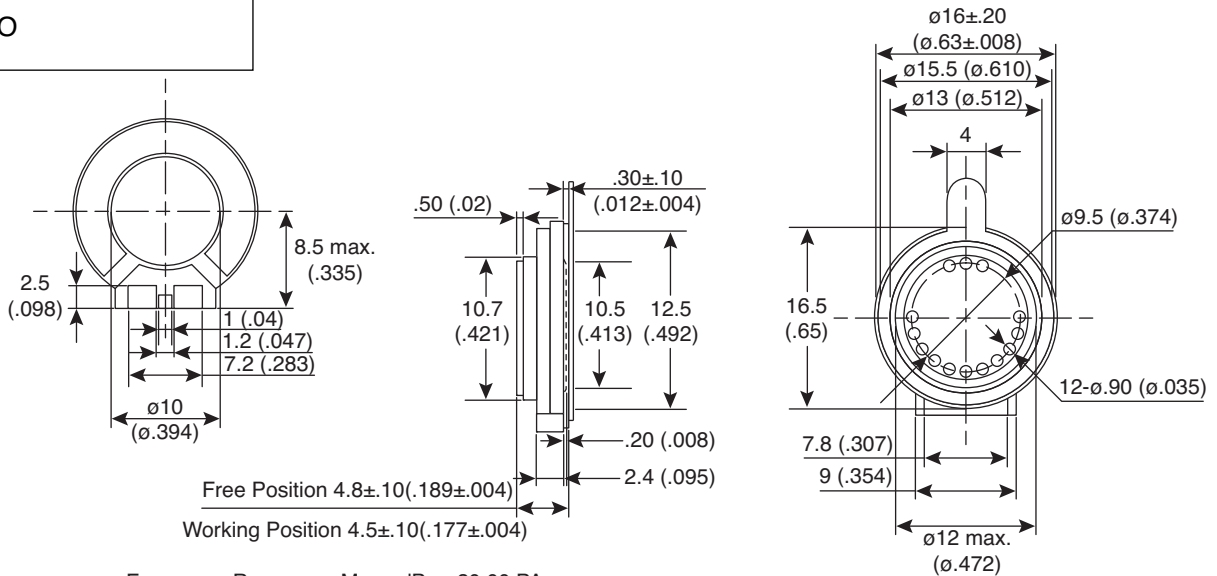

Dynamic Speaker

Electrical Specifications:

- Rated Input Power: 1.0 W (Long time)
- Max. Input Power: 1.2 W (Short time)
- Impedance: $8\Omega \pm 20\%$ at 1000 Hz
- Resonant Frequency (F_0): 800Hz $\pm 20\%$ at F_0 , 1V
- Sensitivity (SPL): 85dB(1W/m) ± 3 dB
91dB(1W/0.1m) ± 3 dB
- Frequency Range: $F_0 - 20$ K Hz

Material:

- Magnet: Nd-Fe-B

Mechanical Specifications:

- Operating Temperature: $-20^\circ\text{C} \sim +60^\circ\text{C}$
- Storage Temperature: $-30^\circ\text{C} \sim +70^\circ\text{C}$

Note:

- RoHS Compliant

KT-400431