
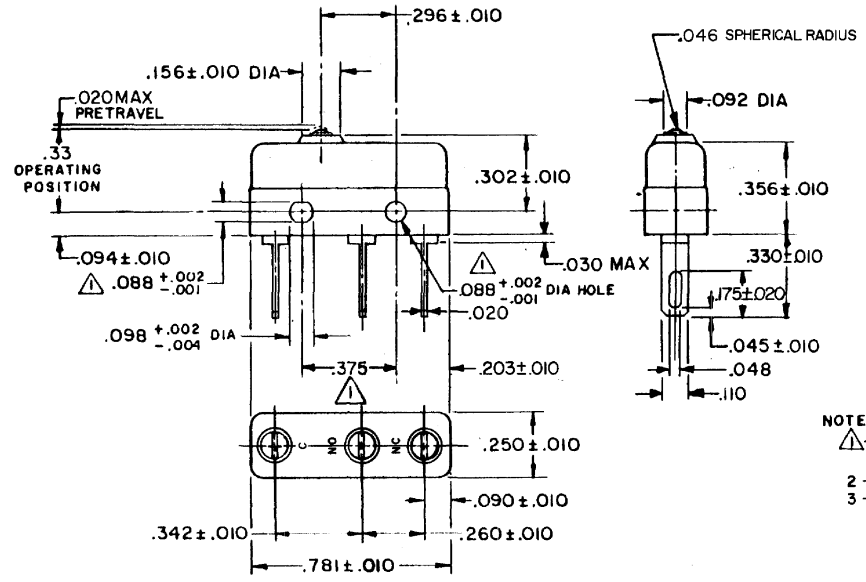


FO-55111-A

HONEYWELL  
PART NUMBER  
11SM23-H4  
PRODUCT CODE  
TWT2334

REV	DOCUMENT	CHANGED BY	CHECK
10	0038090	VS 28APR08	BLR



NOTE -  
 ▲ MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .375 ± .002 CENTERS  
 2 - TERMINALS ARE PLATED FOR SOLDERING  
 3 - MATING CONTACT SURFACES ARE 24K SOLID GOLD OVERLAY

RELEASE NO.	PR-3639
REPLACES	

CHARACTERISTICS	ELECTRICAL DATA	DESIGN UNITS: INCH TOLERANCES UNLESS NOTED:	DRAWN	VK	27 NOV 07	<b>Honeywell</b> TITLE SWITCH - BASIC
			CHECK	RJ	27 NOV 07	
OPERATING FORCE - - - - 3 - 5 OZ	CONTACT ARRANGEMENT S P D T	NO PLACE .X ±	THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.			INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY
RELEASE FORCE - - - - 1 OZ MIN	30 VOLTS DC RATING	ONE PLACE .X ±				
DIFFERENTIAL TRAVEL - - - .004 MAX	SEA LEVEL 50,000 FT	TWO PLACE .XX ±	B	I	11SM23-H4	10
OVERTRAVEL - - - - .005 MIN	INDUCTIVE 1/2 AMP 1/2 AMP	THREE PLACE .XXX ±	SCALE	-	WEIGHT .006 LB MAX	SHEET 1 OF 1
	RESISTIVE 1 AMP 1 AMP	FOUR PLACE .XXXX ±	RASTER			
	MAXIMUM INRUSH 2 AMP	ANGLES ±	THIRD ANGLE PROJECTION			
APPROVALS	KEMA CE 1A, 250V ~ T85 1E4		APPROVALS UL CSA 1A, 125 VAC			