

MICRO SWITCH
a Honeywell Division

FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING

V7-3A17D8-000-3


CW-B0302

CATALOG LISTING
V7-3A17D8-000-3
REPLACES
RELEASE NO. PR-18122

ISSUE
M
5

| REVISIONS | |
|-----------|------------------------------|
| A | CO-67704 JAP 18 JUN 90 |
| B | CO-67929 WLS 12 OCT 90 |
| C | CO-69198 BAB 7 MAR 91 |
| D | CO-76104 GRT 4 OCT 93 |

CHECK
3 APR 90

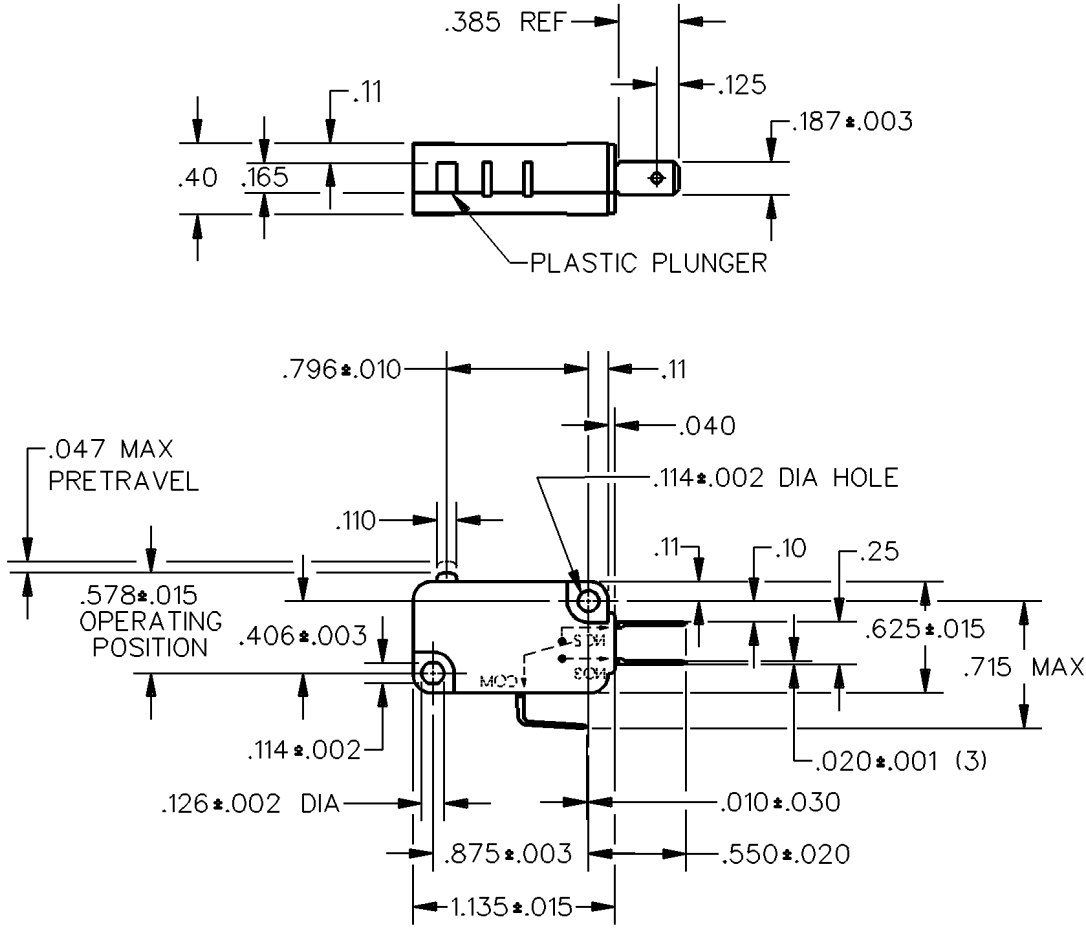

NOTE
1 - SWITCH WILL OPERATE AND RELEASE WITHIN FULL EXCURSION OF THE PLUNGER

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

| CHARACTERISTICS | ELECTRICAL DATA | SCALE FULL | DO NOT SCALE PRINT |
|------------------------------------|---|--|--------------------|
| OPERATING FORCE - - 60 GRAMS MAX | CONTACT ARRANGEMENT S P D T | UNLESS OTHERWISE SPECIFIED TOLERANCES ARE | |
| RELEASE FORCE - - - - 11 GRAMS MIN | | ONE PLACE (.0) ±.030 | |
| OVERTRAVEL - - - - .050 MIN | L162 5A 125, 250, 277 VAC 1/10HP 250 VAC | TWO PLACE (.00) ±.015 | |
| RELEASE TRAVEL - - - - .010 MIN | | THREE PLACE (.000) ±.005 | |
| | | ANGLES | ± |
| | | WEIGHT | |



DDM/CAD
DRAWN

WLS 3 APR 90 CHECK JAP 3 APR 90