


Dimensions: mm (in.)

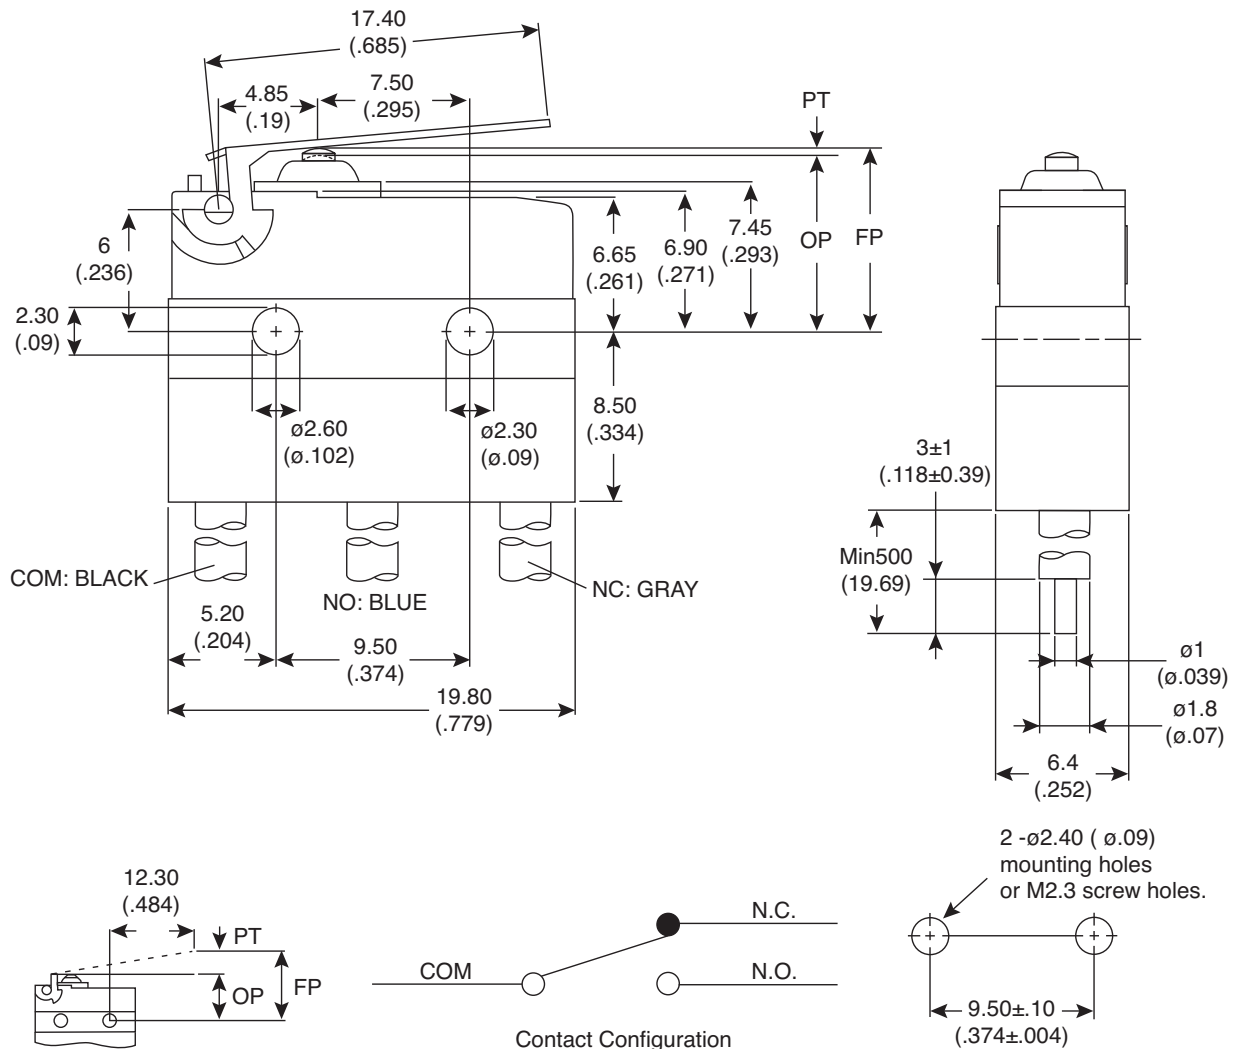

Mechanical Specifications:

- Operating Frequency: mechanical
120 operations/min
- Mechanical Life: 2,000,000 operation Min.

Note:

- RoHS Compliant and Process Compatible with 260° solder.

Electrical Specifications:

- Rating: 6A / 125VAC / 250VAC
- Operating Frequency: electrical 10~30 operations/min
- Electrical Life: 6,000~50,000 operations
- Contact Resistance: 100mΩ max.
- Insulation Resistance: 100mΩ min. at 500VDC
- Dielectric Strength: 1,000VAC RMS (50-60HZ)

Operating Characteristics:

- OF Max. (g): 70
- OP (mm): 8.8 ± 1.6
- PT Max. (mm): 6.3
- OT Min. (mm): 1.6
- MD Max. (mm): 0.9
- FP Max. (mm): 13.5
- RF Max. (g): 14

Sealed Snap Switch
101-71-06-070ST-EV



Available from Mouser Electronics

www.mouser.com

1-800-346-6873

Specifications are subject to change without notice. No liability or warranty implied by this information. Environmental compliance based on producer documentation.