
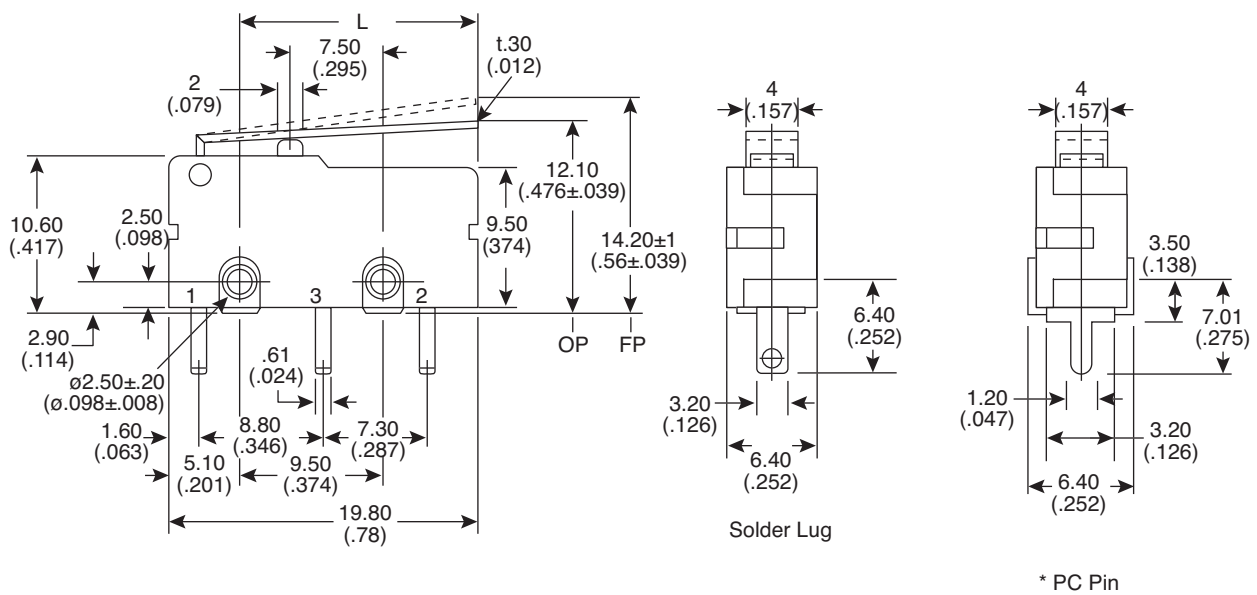



Dimensions: mm (in.)



**Electrical Specifications:**

- Rating: 5A/125VAC
- Insulation resistance: 100MΩ > 500VDC
- Dielectric strength: 1000VAC for 1 minute
- Contact resistance: <50mΩ
- Life cycling (full load): 100,000 cycles

**Mechanical Specifications:**

- Switching timing: non-shorting
- Life cycling (no load): 1,000,000 cycles
- Operating temperature: -5°C ~ +70°C

Mouser Stock No.	L (In.)	Travel (In.)	Oper. Force	Terminal Type
101-1201-EV	.571	.079	28g	Solder Lug
101-1202-EV	.650	.087	25g	Solder Lug
101-1203-EV	.890	.126	18g	PC Pin
101-1206-EV	1.69	.224	10g	PC Pin

**Note:**

- RoHS Compliant

**Miniature Snap Switches**

101-1201-EV, 101-1202-EV, 101-1203-EV, 101-1206-EV



Available from Mouser Electronics

www.mouser.com

1-800-346-6873

Specifications are subject to change without notice. No liability or warranty implied by this information. Environmental compliance based on producer documentation.