


Dimensions: mm (in.)

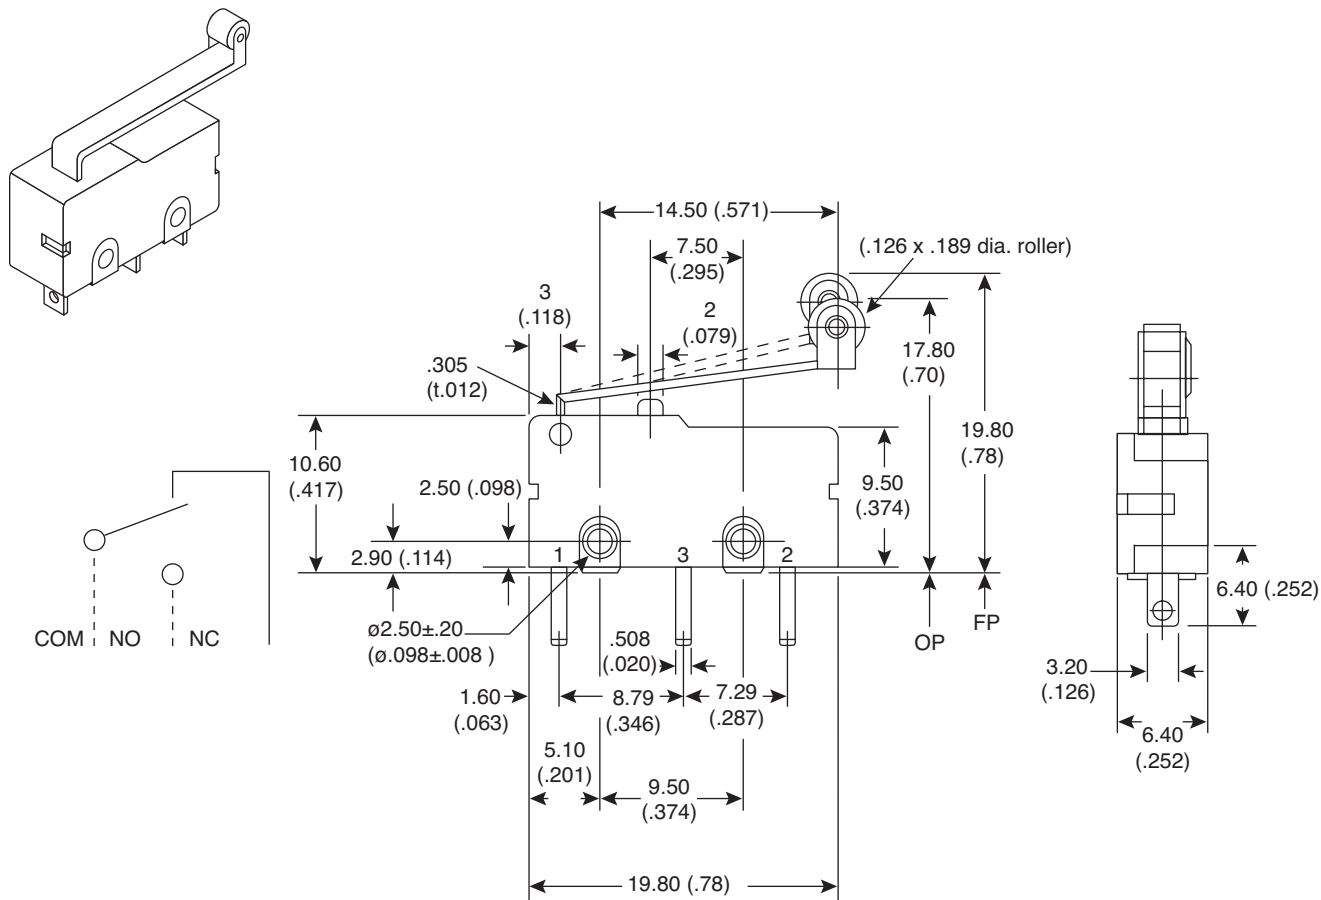

Electrical Specifications:

- Rating: 5A/125VAC
- Insulation resistance: 100MΩ > 500VDC
- Dielectric Strength: 1000VAC for 1 minute
- Contact resistance: <50mΩ
- Life cycling (full load): 100,000 cycles

Mechanical Specifications:

- Switching timing: non-shorting
- Life cycling (no load): 1,000,000 cycles
- Operating temperature: -15°C ~ +70°C
- Operating force: 30g ± 12g
- Travel: .063

Note:

- OP: Operating Position
- FP: Free Position
- Pre-Travel: FP - OP
- RoHS Compliant

**Miniature Snap Switch
101-1205-EV**



Available from Mouser Electronics

www.mouser.com

1-800-346-6873

Specifications are subject to change without notice. No liability or warranty implied by this information. Environmental compliance based on producer documentation.