


Dimensions: mm (In.)

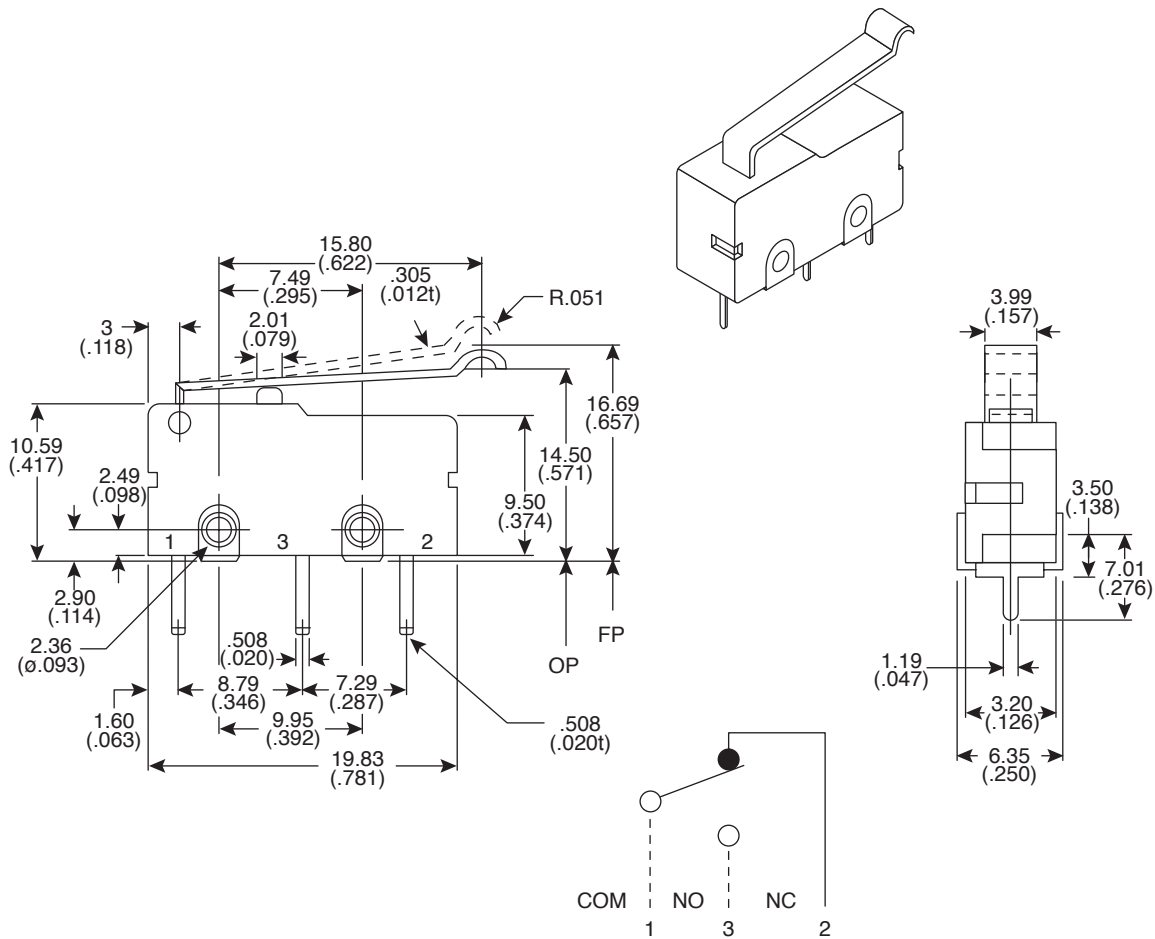

Electrical Specifications:

- Rating: 3A/125VAC
- Insulation resistance: 100MΩ @ >500VDC
- Dielectric Strength: 500VAC for 1 minute
- Contact resistance: <50mΩ
- Life cycling (full load): 200,000 cycles

Note:

- OP: Operating Position
- FP: Free Position
- Pre Travel: FP-OP
- RoHS Compliant

Mechanical Specifications:

- Switching timing: non-shorting
- Life cycling (no load): 1,000,000 cycles
- Temperature range: -25°~+80°C
- Ambient humidity used: <85% RH
- Operating force: 28±10g
- Travel: ø.86"

Materials:

- Housing, button: 30% glass fiber reinforced PBT, black
- Switch lever: stainless steel
- Switch terminals: brass
- Spring: steel
- Contacts: silver
- Metal contact: phosphor bronze

Miniature Snap Switch
101-1204-EV



Available from Mouser Electronics

www.mouser.com

1-800-346-6873