


Dimensions: mm and (In.)

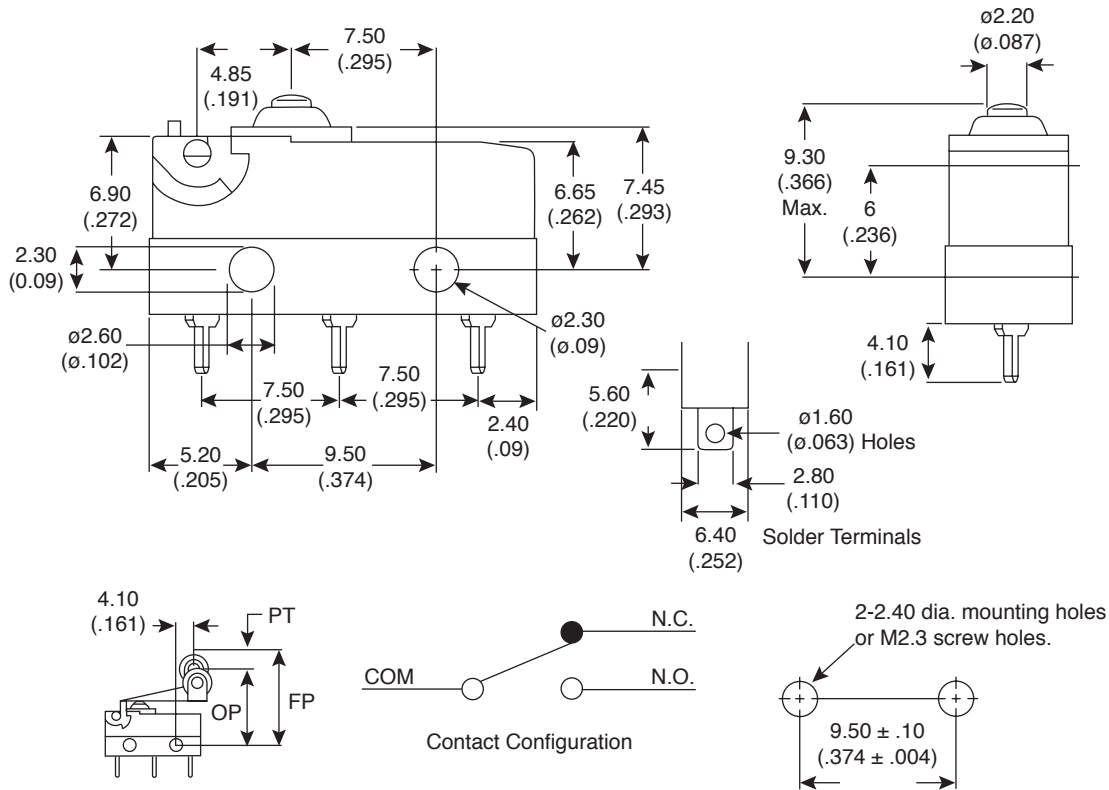

Electrical Specifications:

- Electrical frequency: 10~30 operations/min
- Electrical Life: 6,000~50,000 operations
- Rating: 6A/125VAC
- Contact Resistance: 100mΩ max.
- Insulation Resistance: 100mΩ min. at 500VDC
- Dielectric Strength: 1,000VAC RMS (50-60HZ)

Mechanical Specifications:

- Mechanical frequency: 120 operations/min
- Mechanical Life: 2,000,000 operation Min.

Note:

- RoHS Compliant and Process Compatible with 260° solder.

Operating Characteristics:

- OF Max. (g): 72
- Op (mm): 14.5 ± 1.1
- PT Max. (mm): 4.3
- OT Min. (mm): 0.9
- MD Max. (mm): 0.6
- FP Max. (mm): 17.7
- RF Max. (g): 15
- Terminal Width: 0.5mm

Sealed Snap Switch
101-72-06-072RR-EV



Available from Mouser Electronics

www.mouser.com

1-800-346-6873