


Dimensions: mm (In.)

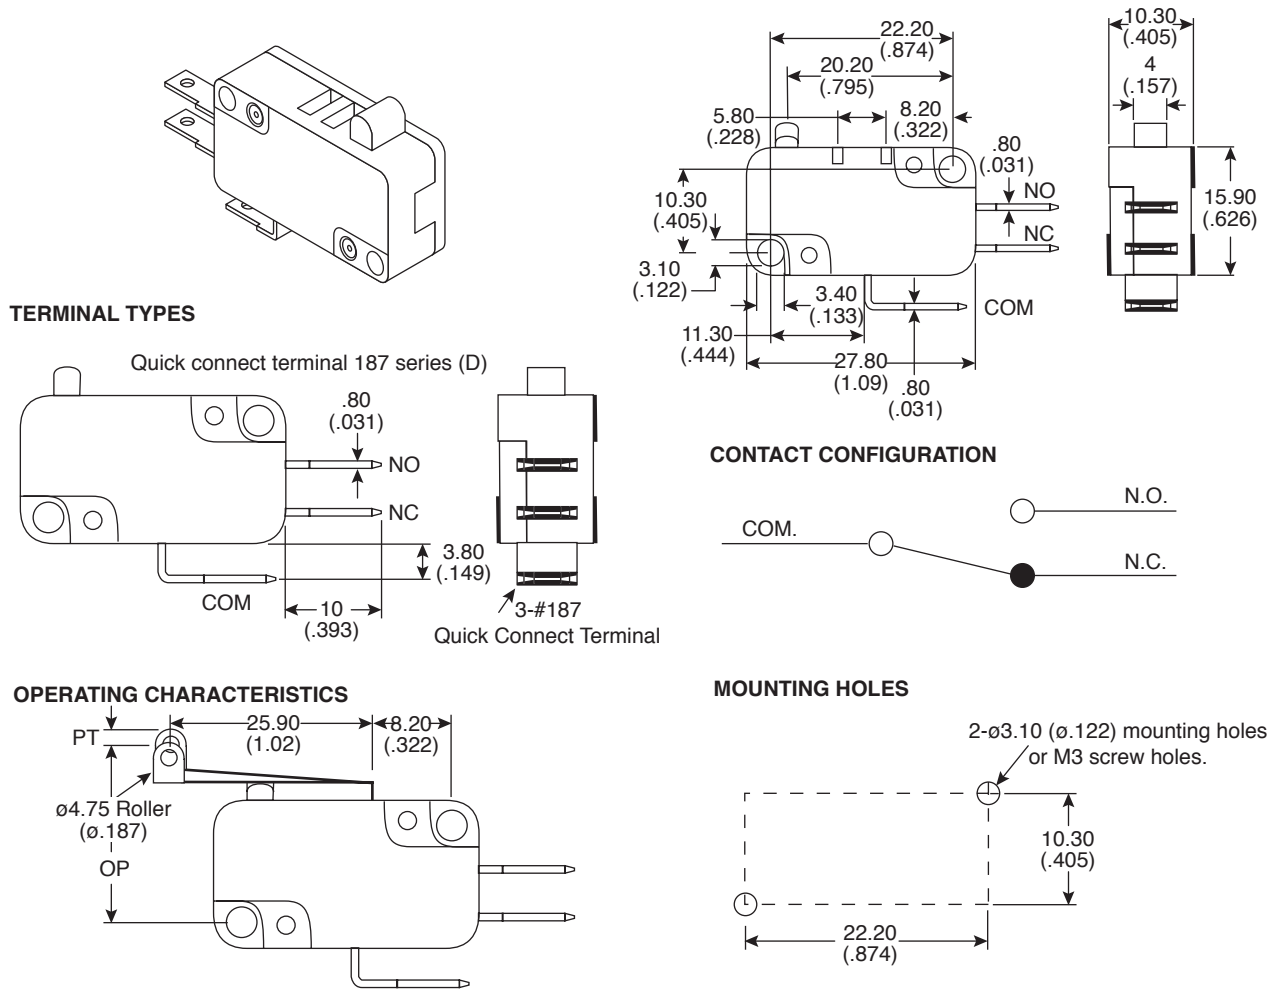

**Electrical Specifications:**

- Insulation Resistance (at 500VDC): 100MΩ Min.
- Dielectric Strength: 1,000VAC RMS(50-60HZ)
- Contact Resistance (Initial): 30mΩ Max.
- Operating Frequency: 10-30 operations/min.
- Operating Speed: 0.1mm to 1m/sec.
- Electrical Life: 6,000~100,000 operations(Min.)
- Rating: 10.1A/125/250 VAC

**Mechanical Specifications:**

- Operating Frequency: 300 operations/min.
- Mechanical Life: 5,000,000 operations(Min.)

**Note:**

- RoHS compliant and process compatible with 260° solder.

**Operating Characteristics:**

- OF (g) max: 80
- OP (mm): 20.4±1.4
- PT max: 4.50mm
- OT min (mm): 0.90
- MD max (mm): 2.60

Miniature Snap Switch  
101-73-10-080RR-EV



Available from Mouser Electronics

www.mouser.com

1-800-346-6873