




Dimensions: mm (In)




TERMINAL TYPES

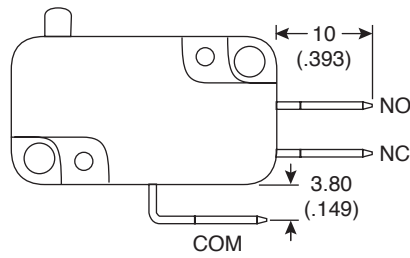


Quick connect terminal 187 series (D)




Quick Connect Terminal

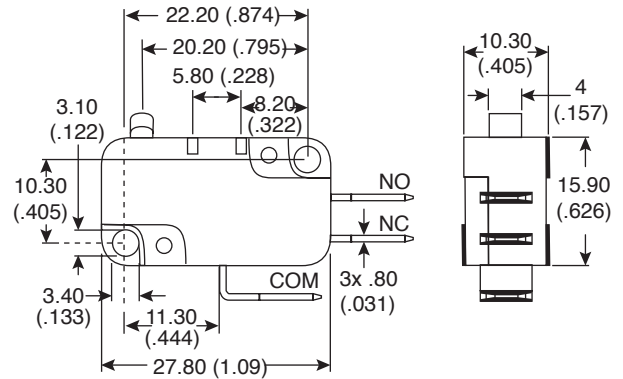


OPERATING CHARACTERISTICS

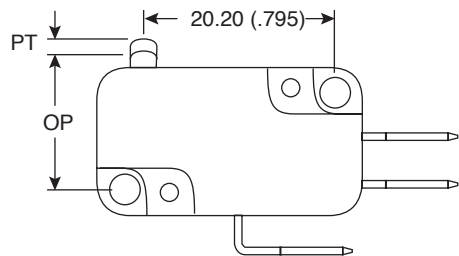

MOUNTING HOLES

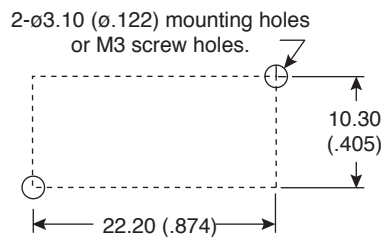

CONTACT CONFIGURATION

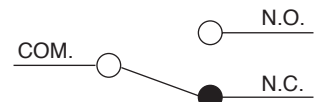

Mechanical Specifications:

- Operating Frequency: 300 operations/min.
- Life: 5,000,000 operations min.

Note:

- RoHS compliant and process compatible with 260° solder.

Electrical Specifications:

- Rating: 10.1A/125/250VAC
- Insulation Resistance (at 500VDC): 10MΩ min.
- Dielectric Strength: 1,000VAC RMS (50-60HZ)
- Contact Resistance (Initial): 30mΩ max.
- Operating Frequency: 10-30 operations/min.
- Operating Speed: 0.1mm to 1m/sec.
- Life: 6,000~1000,000 operations min.

Operating Characteristics:

- OF (g) max: 150
- OP (mm): 14.7 ± 0.5
- PT max: 1.90mm
- OT min (mm): 0.70
- MD max (mm): 1.20

Miniature Snap Switch
101-73-10-150XX-EV



Available from Mouser Electronics

www.mouser.com

1-800-346-6873