




MICRO SWITCH
a Honeywell Division

FED. MFG. CODE 91929

MINIATURE PRECISION
LIMIT SWITCH

CATALOG LISTING

924CE1-S3

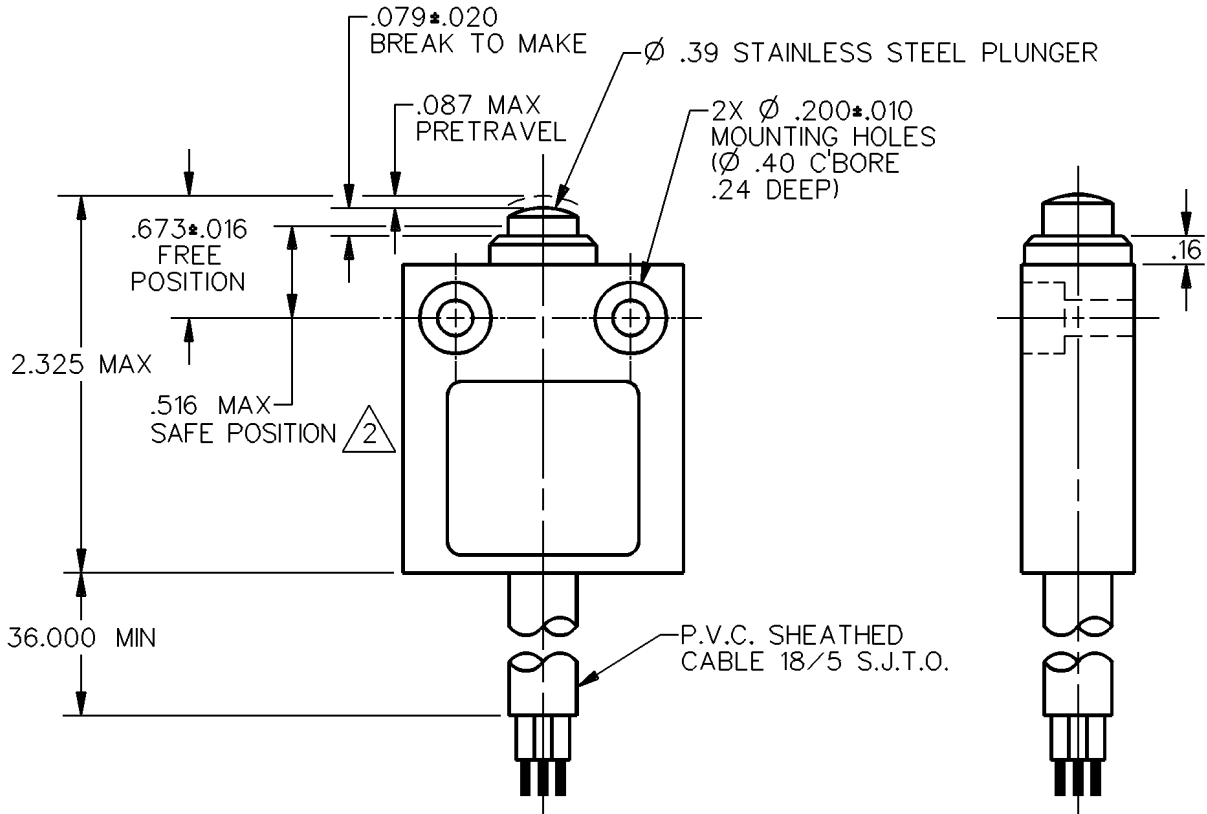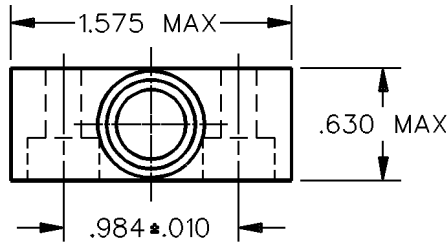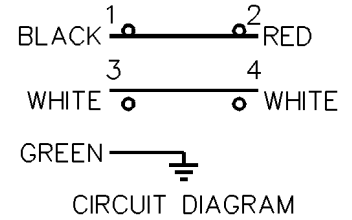


NOTES

- 1 - ZINC HOUSING FINISHED WITH GRAY PAINT
- 2 THE MINIMUM PLUNGER TRAVEL PAST BREAK, FOR A SAFE CONTACT GAP IS .060
- 3 - SWITCH PROVIDES BREAK BEFORE MAKE CIRCUITRY

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL	DO NOT SCALE PRINT	
OPERATING FORCE — — — 5.1 LB MAX	CONTACT ARRANGEMENT S P D T D B	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	ONE PLACE (.0) ±.030	
OVERTRAVEL — — — .039 MIN	10A-250 VAC 1/3HP-125 OR 250 VAC			TWO PLACE (.00) ±.015
				THREE PLACE (.000) ±.005
		ANGLES	±	
		WEIGHT		



924CE1-S3
 M
 DRAWING NUMBER
 2
 ISSUE
 REVISIONS
 A CO-69061
 S A V 29 AUG 91
 CHECK
 CHECK
 DDM/CAD
 DRAWN
 S A V 29 AUG 91
 CHECK
 REPLACES
 RELEASE NO. PR-14729