






Dimensions: mm (in.)

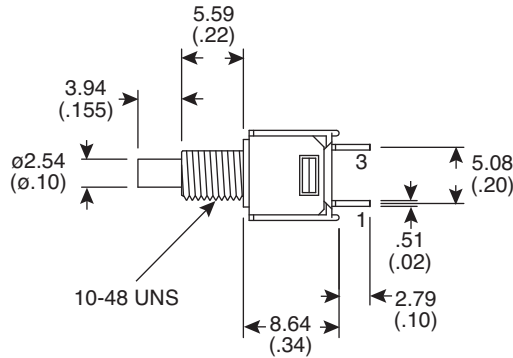


POS. 1	POS. 2
OFF	(ON)
OPEN	1-3

SWITCH FUNCTION



Without Locking Ring.

PANEL MOUNTING

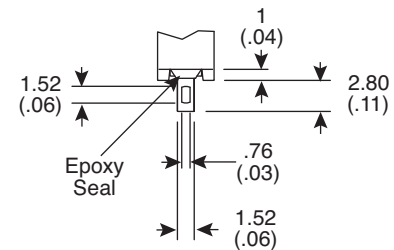

SOLDER LUG

**Electrical Specifications:**

- Rating: 1A, 250VAC; 3A 120VAC or 28VDC
- Contact Resistance: 20mΩmax. initial @ 2-4VDC 100mA
- Insulation Resistance: 1,000MΩmin.
- Dielectric Strength: 1,000 V RMS@ sea level

**Mechanical Specifications:**

- Mechanical Life: 60,000 make-and-break cycles.
- Operating Temperature: -30°C to 85°C

**Materials:**

- Case: Diallyl phthalate (DAP) (UL94V-0)
- Plunger: Thermoplastic Polyester-black
- Bushing: Brass, nickel plated.
- Housing: Stainless steel
- Contact: Silver or gold plated.
- Terminal: Brass, silver plated
- Terminal Support: Brass, electronin plated.

**Note:**

- RoHS compliant by exemption

**Sub-Miniature Pushbutton Switch**  
107-3024-EVX



Available from Mouser Electronics

www.mouser.com

1-800-346-6873

Specifications are subject to change without notice. No liability or warranty implied by this information. Environmental compliance based on producer documentation.