



Dimensions: mm (In.)



POS. 1	POS. 2
ON	MOM
1-3	1-2

SWITCH FUNCTION

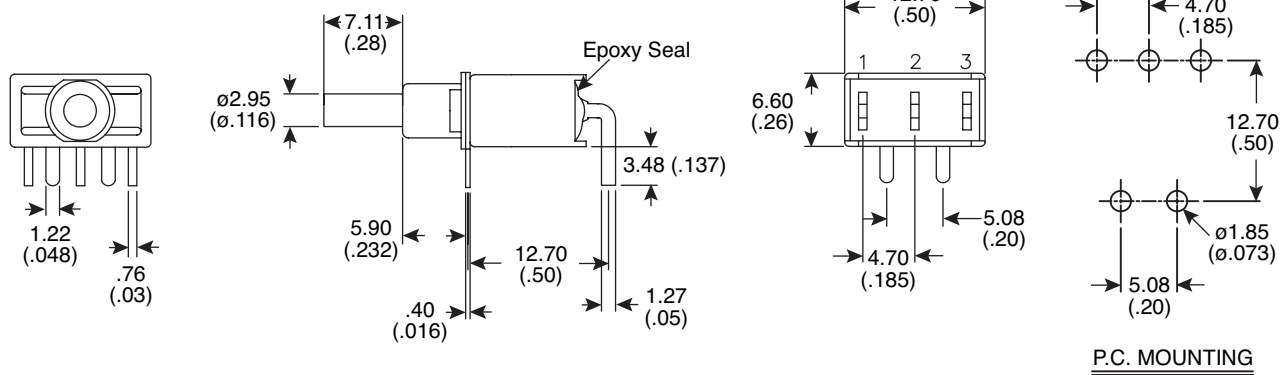

P.C. MOUNTING

Mechanical Specifications:

- Mechanical Life: 50,000 make-and-break cycles.
- Operating Temperature: -30°C to 75°C
- Cap Installation Force: 10 lbs., max. Permissible

Electrical Specifications:

- Rating: 1 A/250VAC, 3 A/120VAC or 28 VDC
- Contact Resistance: 20mΩmax. initial @ 2-4VDC 100mA
- Insulation Resistance: 1,000MΩmin.
- Dielectric Strength: 1,500 V RMS@ sea level

Materials:

- Case and Bushing: Glass filled Nylon 6/6, flame retardant, heat stabilized (94v-0)
- Plunger: Glass filled Nylon or Glass Fille polyester (UL 94v-0).
- Switch Support: Brass or Steel, tin plate.
- Switch Support Retainer: Stainless Steel
- N.O. & N.C. Contacts: Brass, with gold plate over nickel plate.
- Common Contacts & All Terminals: Copper alloy, with gold plate over nickel plate.
- Terminal Seal: Epoxy

Note:

- RoHS compliant by exemption

Sealed Snap-Acting Pushbutton Switch
107-3002-EVX

