



**DIMENSIONS: mm (in.)**



POS. 1	POS. 2
ON	MOM
1-3, 4-6	1-2, 4-5

SWITCH FUNCTION

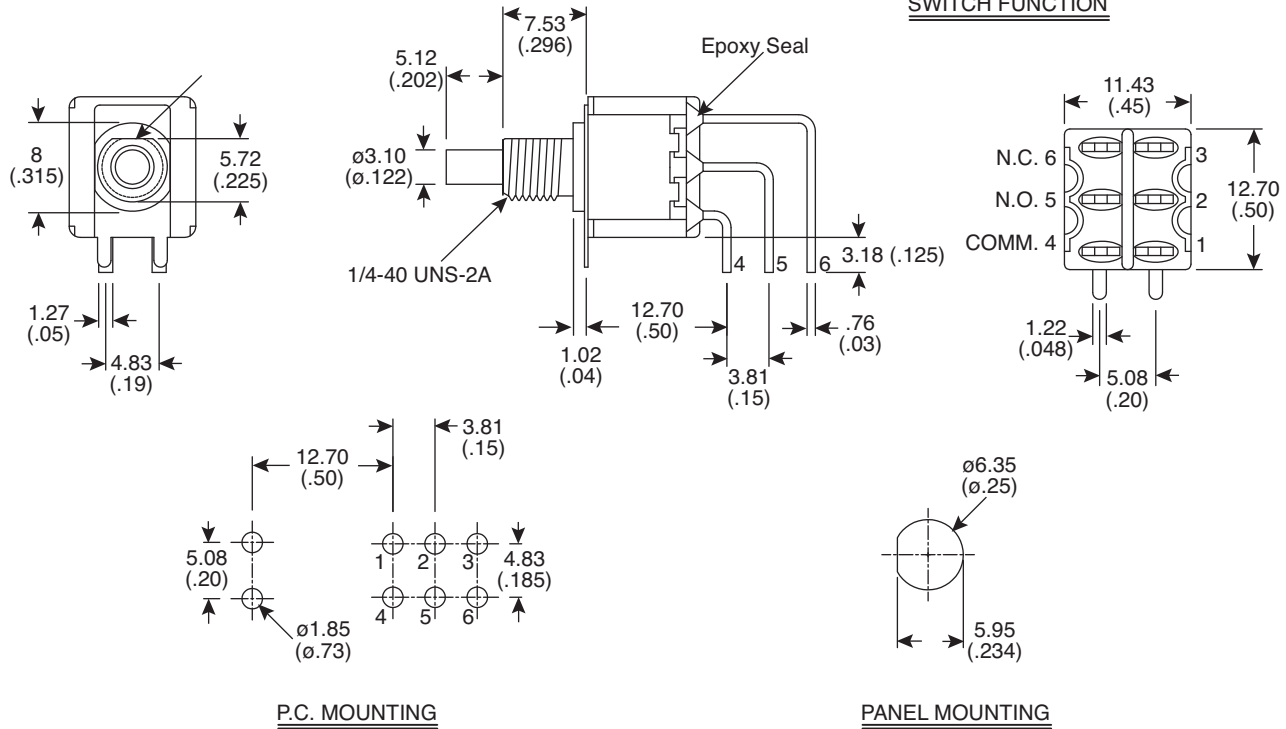

**Electrical Specifications:**

- Rating: 1A, 250VAC; 3A, 120VAC or 28 VDC
- Contact Resistance: 20mΩmax. initial @ 2-4VDC 100mA
- Insulation Resistance: 1,000MΩmin.
- Dielectric Strength: 1,000 V RMS@ sea level

**Mechanical Specifications:**

- Mechanical Life: 50,000 make-and-break cycles.
- Operating Temperature: -30°C to 85°C

**Materials:**

- Case: Diallyl phthalate (DAP) (UL94V-0)
- Plunger: Glass filled nylon or glass filled polyester
- Bushing: Brass, nickel plated.
- Housing: Stainless steel
- Contact: Silver plated.

**Note:**

- RoHS compliant by exemption

**Snap-Acting Pushbutton Switch**  
107-3010-EVX



Available from Mouser Electronics

www.mouser.com

1-800-346-6873

Specifications are subject to change without notice. No liability or warranty implied by this information. Environmental compliance based on producer documentation.