

## LRG-Series Double Pole Rocker & Paddle Switches



The double pole version of the R-Series incorporates the same sleek lines as the original Curvette, in a double pole envelope. This illuminated version features silver-plated butt-action contacts with ratings to 20A/125, 15A 250VAC and withstand peak inrush currents up to 100 amps. Clear or translucent style rocker actuators and a choice of solder lug, .250 Tab and wire lead terminations enable this switch to adapt to high current applications within the Power Supply, Appliance, Exercise Equipment and Music Equipment Industries.

### Dielectric Strength

UL/CSA: 1000V - live to dead metal parts & opposite polarity

### Electrical Life


50,000 cycles

### Mechanical Life

100,000 cycles

### Operating Temperature

-40°F to 185°F (-40°C to 85°C)

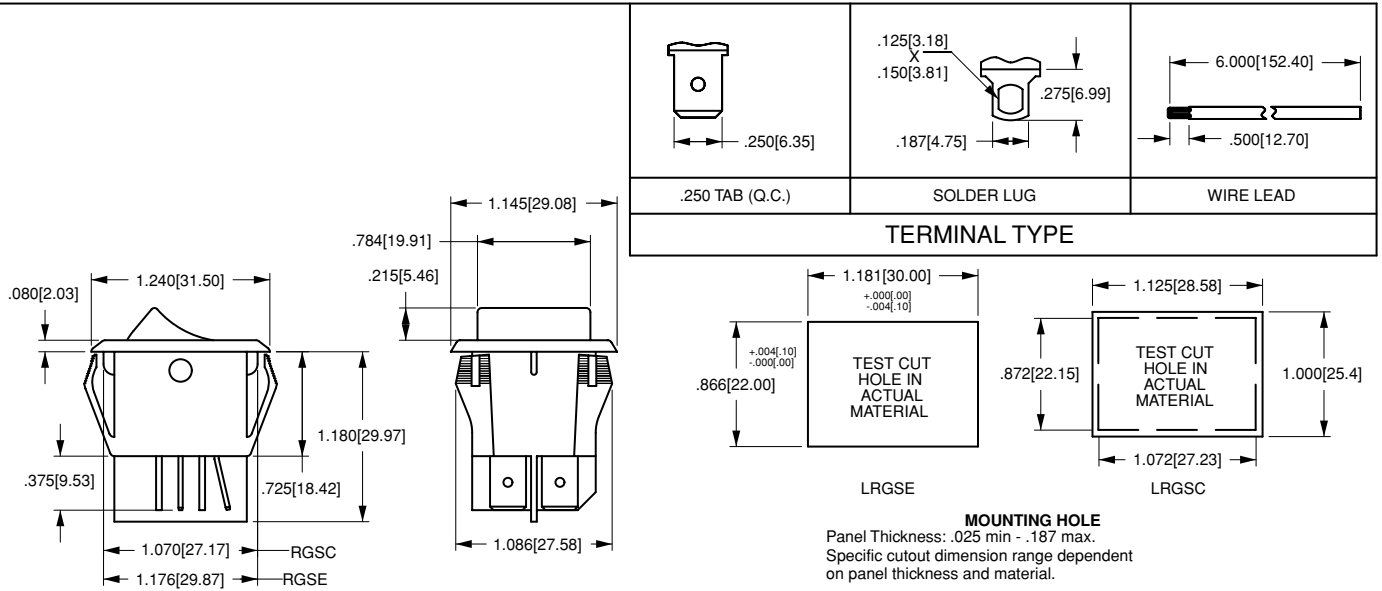

**LRGSCK611 - R S - B - B / 250N**

1 Base Part Number

2 Actuator Style  
 3 Actuator Color

4 Bezel Color/Style

5 Rocker Legend

6 Lamp Voltage

### 1 BASE PART NUMBER: SERIES/CIRCUITRY/RATING<sup>1</sup>/TERMINATION

15A 250 VAC, 20A 125 VAC, 3/4 HP 125-250 VAC

|  | Solder Lugs | .250 Tabs | Wire Leads |
|--|-------------|-----------|------------|
| <b>Standard Base</b>                     |             |           |            |
| OFF-NONE ON                              | LRGSCK610   | LRGSCK611 | LRGSCK615  |
| <b>European Base</b> (22 x 30 mm cutout) |             |           |            |
| OFF-NONE ON (Single Pole)                | LRGSEK610   | LRGSEK611 | LRGSEK615  |
| <b>15A 6-24 V<sup>2</sup></b>            |             |           |            |
| <b>Standard Base</b>                     |             |           |            |
| OFF-NONE ON                              | LRGSCK510   | LRGSCK511 | LRGSCK515  |
| <b>European Base</b> (22 x 30 mm cutout) |             |           |            |
| OFF-NONE ON (Single Pole)                | LRGSEK510   | LRGSEK511 | LRGSEK515  |

### 2 ACTUATOR STYLE

R rocker (translucent) C rocker (clear)

### 3 ACTUATOR COLOR

|                  |             |
|------------------|-------------|
| L <sup>3</sup>   | lime green  |
| A                | amber       |
| B <sup>3,5</sup> | blue        |
| C <sup>4</sup>   | white/clear |
| G <sup>5</sup>   | green       |
| P                | yellow      |
| R                | red (clear) |
| S                | red         |
| W                | pale red    |

### 4 BEZEL COLOR<sup>1</sup>

B black W white

### 5 ROCKER LEGEND

|                             | hot stamp |
|-----------------------------|-----------|
| NO LEGEND                   | 0         |
| OFF-ON vertical             | A         |
| OFF-ON horizontal           | B         |
| I-O horizontal              | D         |
| I-O vertical                | E         |
| DUAL OFF-ON, I-O vertical   | H         |
| DUAL OFF-ON, I-O horizontal | J         |

### 6 LAMP VOLTAGE<sup>2</sup>

|                       |                       |
|-----------------------|-----------------------|
| 006V 6V incandescent  | 024V 24V incandescent |
| 012V 12V incandescent | 125N 125V neon        |
| 018V 18V incandescent | 250N 250V neon        |

### NOTES

- Additional ratings, colors and clear style actuators are available. Consult factory.
- Incandescent lamps must specify 15A 24V rating only.
- Available with incandescent lamps only.
- Clear color provided where specified with clear style rocker.
- Available with clear style rocker only.