

**Model 7073  
BNC (F) Straight PCB Mount 50 Ω**



Model 7073 BNC (F) Straight PCB Mount 50 Ω

Use for secure attachment in 50 Ω PCB mount applications.

**Features**


- Convenient PCB mount configuration.
- Precision machined body with gold plated contacts.
- Insulation PTFE (**not delrin**).

**Materials**

- Body is machined brass with tarnish resistant nickel plating.
- Female center contacts are gold-plated heat treated beryllium copper.
- Body made from precision machined high quality brass (not die cast).
- High quality machined PTFE dielectric.

**Ordering Information**

Model: 7073 BNC (F) PCB Mount.

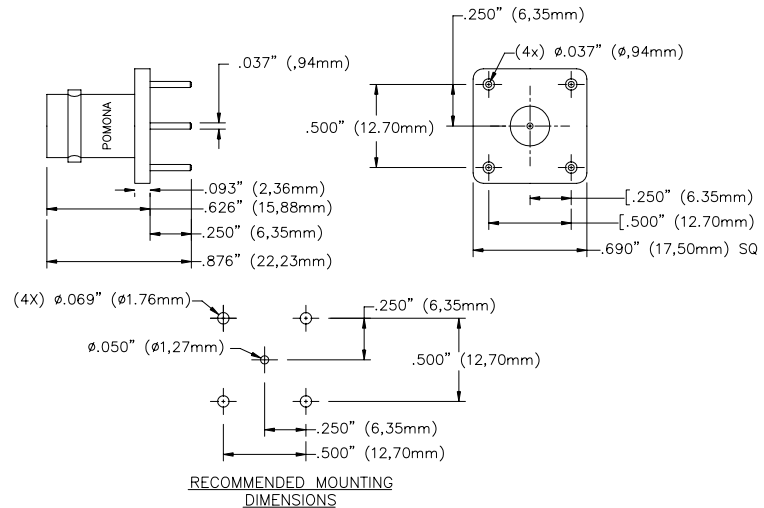

**Specifications**

Nominal impedance	50 Ω
Frequency	0-4 GHz
VSWR	1.30 max. 0-4 GHz
Center / Outer contact resistance	1.5 / 1.0 mΩ
Number of insertions	500
Insulation resistance	5000 MΩ (min)
Dielectric withstand voltage	1500 Vrms
Ratings: Voltage: 500 Vrms Operating temperature: -85° F to +131° F (-65 °C to +155 °C) Max.	

USA: Sales: 800-490-2361 Technical Support: 800-241-2060 Fax: 888-403-3360

Europe: 31-(0) 40 2675 150 International: 425-446-5500

e-mail: [technicalsupport@pomonatest.com](mailto:technicalsupport@pomonatest.com)

Where to Buy: [www.pomonaelectronics.com](http://www.pomonaelectronics.com)

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.