
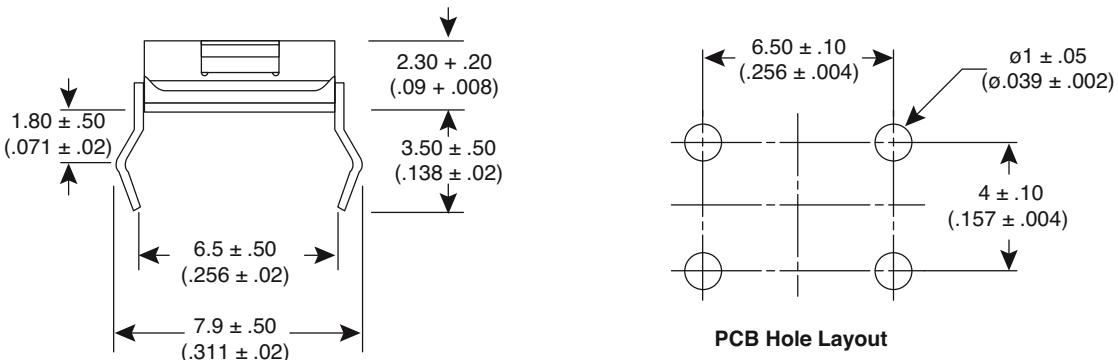


Dimensions: mm (In.)

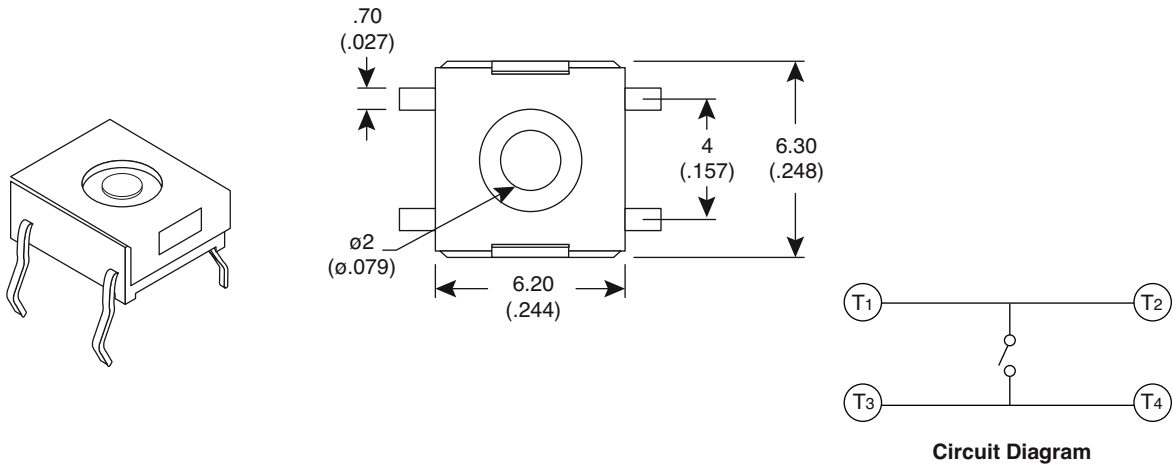

Electrical Specifications:

- Rating: 50mA / 12VDC
- Type: SPST PC mount, washable
- Contact resistance: 100mΩ max.
- Insulation resistance: 100MΩ min. @ 500VDC
- Dielectric Strength: 250VAC for 1 minute

Mechanical Specifications:

- Operating force: 160±50gf
- Operating temperature: -25°~+70°C
- Storage temperature: -30°~+80°C
- Travel: .010+.001 (.25±.02mm)
- Stop strength: 3Kg for 15 seconds

Materials:

- Cover: Stainless steel
- Contacts: Silver clad phosphor bronze
- Terminals: Silver clad brass
- Base: High-temp thermoplastic nylon

Note:

- RoHS Compliant and Process Compatible with 260° solder

Tactile Switch
101-0165-EV



Available from Mouser Electronics

www.mouser.com

1-800-346-6873

Specifications are subject to change without notice. No liability or warranty implied by this information. Environmental compliance based on producer documentation.