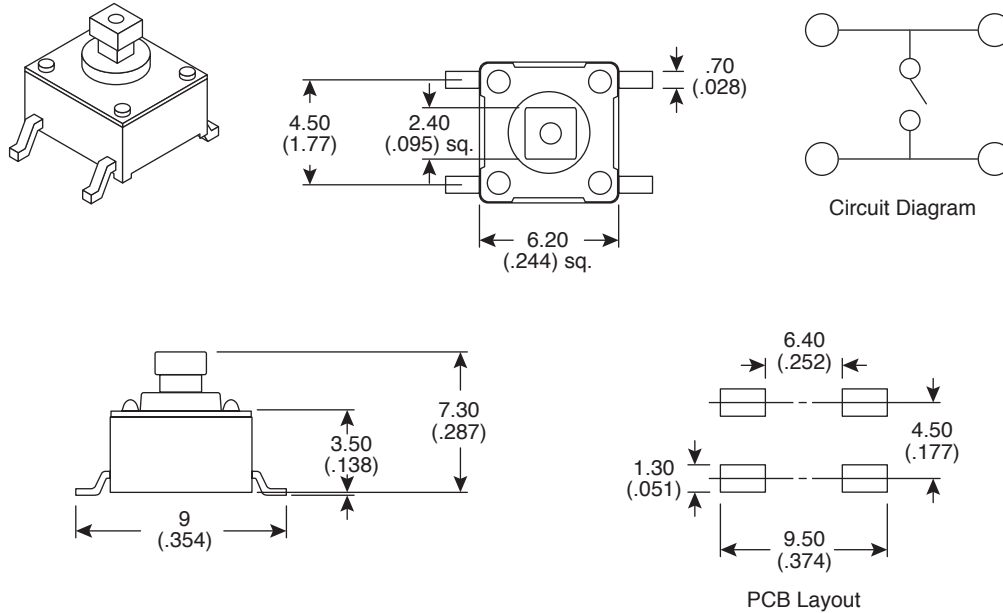


## Dimensions:mm (In.)

**Electrical Specifications:**

- Rating: 50mA/12VDC
- Life: 500,000 cycles
- Contact resistance: 100mΩ max.
- Insulation resistance: 100MΩ min. @ 500VDC
- Dielectric Strength: 250VAC for 1 minute

**Mechanical Specifications:**

- Type: SPST
- Operating force: 160±50g
- Operating temperature: -25°~+70°C
- Storage temperature: -30°~+80°C
- Travel: .01+.008-.004" (.25+.02-.1mm)

**Materials:**

- Cover: tin plated steel
- Contacts: silver clad phosphor bronze
- Terminals: silver clad brass
- Base: nylon, UL94V-0, brown
- Stem: nylon, UL94V-0, brown

**Note:**

- RoHS Compliant and process compatible with 260° solder

**Tactile Switch (SMT)**  
101-0664-EV

**Mountain  
Switch**