


Dimensions: mm (In.)

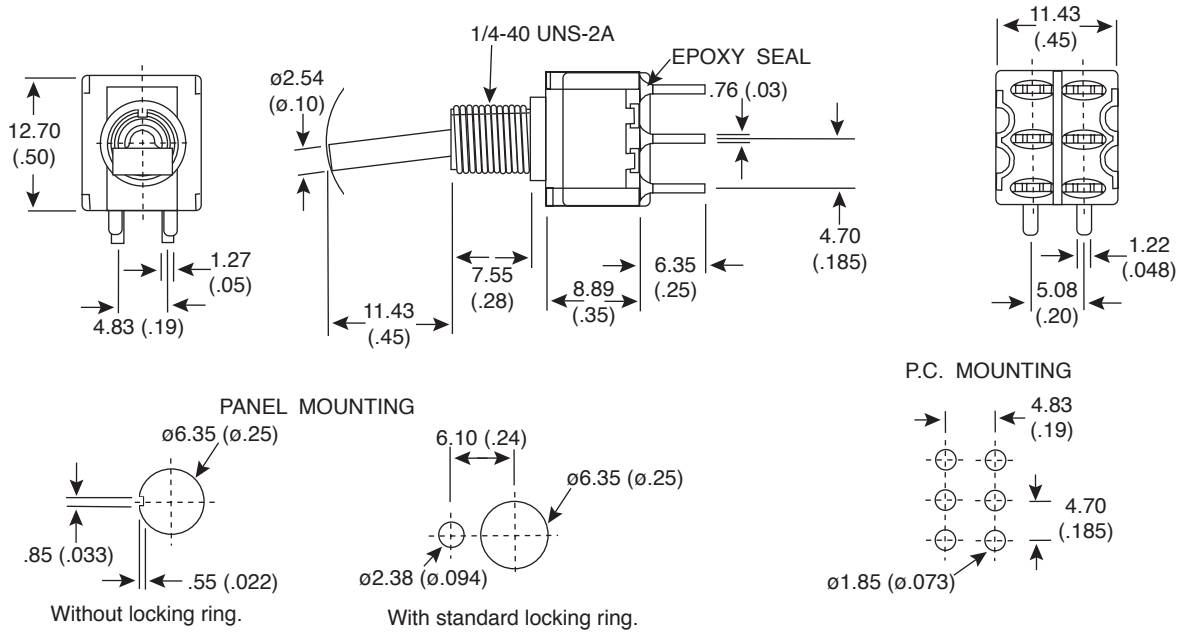

SWITCH FUNCTION

POS.1	POS.2	POS.3
ON	OFF	ON
2-3,5-6	OPEN	2-1,5-4

**Electrical Specifications:**

- Electrical Life: 40,000 make-and-break cycles at full load
- Contact Resistance: 10m $\Omega$  max. initial @ 2-4VDC 100mA
- Insulation Resistance: 1,000M $\Omega$  min.
- Dielectric Strength: 1,000 V RMS@ sea level.
- Rating: 2A / 250 VAC; 5A / 120 VAC or 28 VDC

**Mechanical Specifications:**

- Operating Temperature: -30 $^{\circ}$  C to +85 $^{\circ}$  C

**Note:**

- RoHS Compliant by Exemption

**Materials:**

- Case: Diallyl phthalate (DAP) (UL94v-0)
- Acuator: Brass, chrome plated.
- Bushing: Brass, nickel plated.
- Housing: Stainless steel.
- Terminal/Contact: Silver or Gold plated.

**Toggle Switch**  
108-1MD3T6B1M2QE-EVX

**Mountain**  
**Switch**

Available from Mouser Electronics

www.mouser.com

1-800-346-6873