


Dimensions: mm (in.)

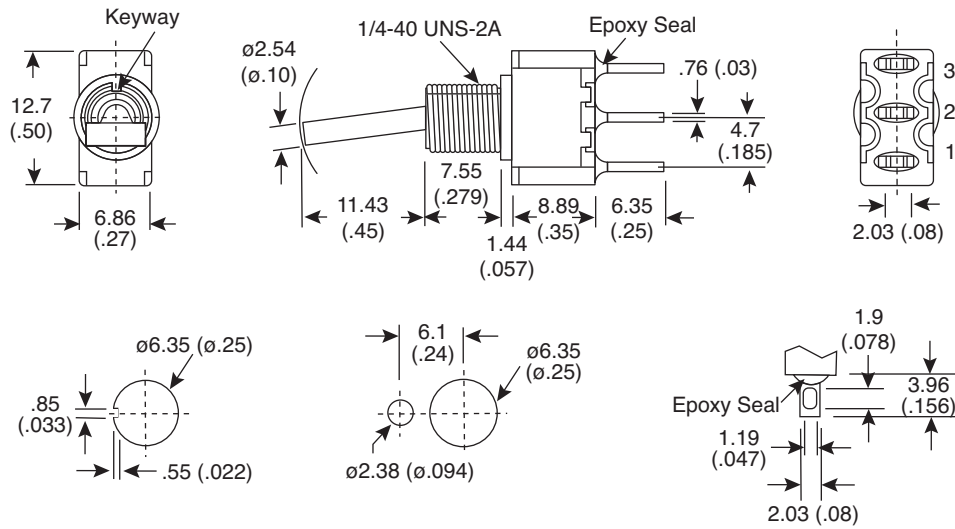

Without locking ring.

With standard locking ring.

PANEL MOUNTING

SOLDER LUG

POS.1	POS.2
ON	(ON)
2-3	2-1

SWITCH FUNCTION

Mechanical Specifications:

- Operating Temperature: -30°C to +85°C

Note:

- RoHS Compliant by Exemption

Electrical Specifications:

- Contact Resistance: 10mΩ max. initial @ 2-4VDC 100mA
- Insulation Resistance: 1,000MΩ min.
- Rating: 2A/ 250VAC, 5A/ 120VAC or 28VDC
- Dielectric Strength: 1,000 V RMS@ sea level

Materials:

- Case: Diallyl phthalate (DAP) (UL94V-0)
- Actuator: Brass, chrome plated.
- Bushing: Brass, nickel plated.
- Housing: Stainless steel.
- Terminal/Contact: Silver plated.

Toggle Switch
108-1MS2T6B1M1QE-EVX



Available from Mouser Electronics

www.mouser.com

1-800-346-6873

Specifications are subject to change without notice. No liability or warranty implied by this information. Environmental compliance based on producer documentation.