

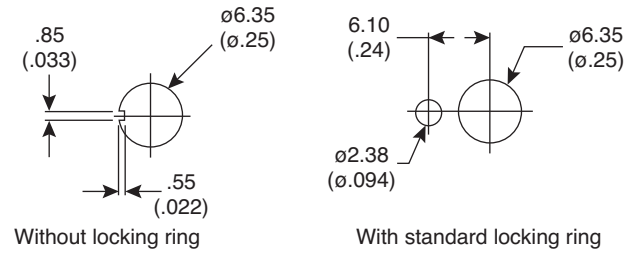
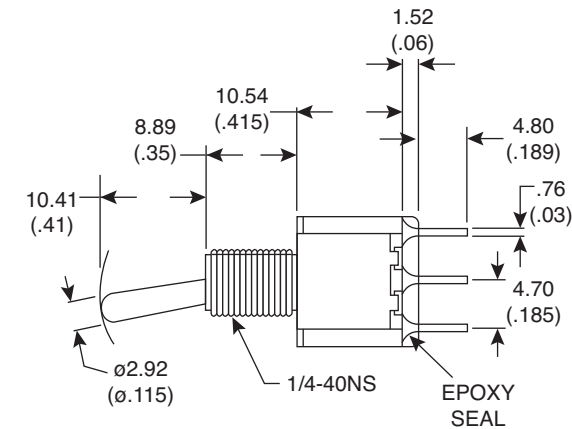


Dimensions: mm (in.)

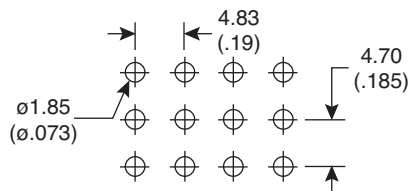

PANEL MOUNTING

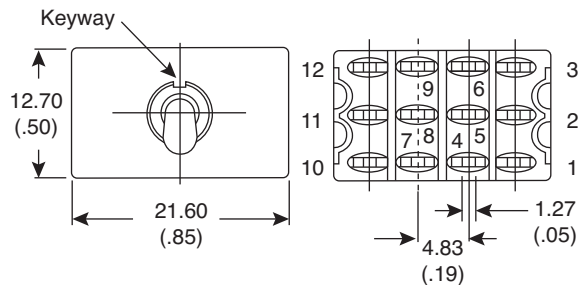

P.C. MOUNTING

Pos. 1	Pos. 2
ON	ON
2-3, 5-6, 8-9, 11-12	2-1, 5-4, 8-7, 11-10

SWITCH FUNCTION

Electrical Specifications:

- Electrical Life: 40,000 make-and-break cycles at full load
- Contact Resistance: 10mΩ max. initial @ 2-4VDC 100mA
- Insulation Resistance: 1,000MΩ min.
- Dielectric Strength: 1,000 V RMS@ sea level
- Rating: 2A/250VAC; 5A/120VAC or 28VDC

Mechanical Specifications:

- Operating Temperature: -30°C to +85°C

Note:

- RoHS compliant by exemption

Materials:

- Case: Diallyl phthalate (DAP) (UL94v-0)
- Acuator: Brass, chrome plated
- Bushing: Brass, nickel plated
- Housing: Stainless steel
- Terminal/Contact: Silver or gold plated

Toggle Switch
 108-1M41T1B1M2QE-EVX



Available from Mouser Electronics

www.mouser.com

1-800-346-6873

Specifications are subject to change without notice. No liability or warranty implied by this information. Environmental compliance based on producer documentation.