



Dimensions: mm (In.)

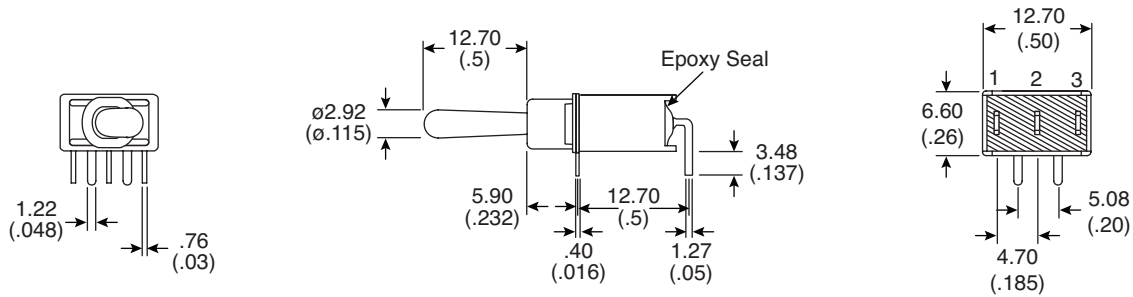

POS.1	POS.2	POS.3
ON	OFF	ON
2-3	OPEN	2-1

**Switch Function**

**Electrical Specifications:**

- Contact resistance: 10m $\Omega$  max. initial @ 2-4VDC 100mA
- Insulation resistance: 1,000M $\Omega$  min.
- Dielectric strength: 1,000 V RMS@sea level
- Rating: 2A / 250VAC; 5A / 120VAC or 28VDC

**Mechanical Specifications:**

- Mechanical life: 50,000 make-and-break cycles
- Operating temperature: -30°C to 85°C

**Note:**

- RoHS Compliant by Exemption

**Sealed Miniature Toggle Switch**  
108-1AS3T1695-EVX



Available from Mouser Electronics

www.mouser.com

1-800-346-6873

Specifications are subject to change without notice. No liability or warranty implied by this information. Environmental compliance based on producer documentation.