


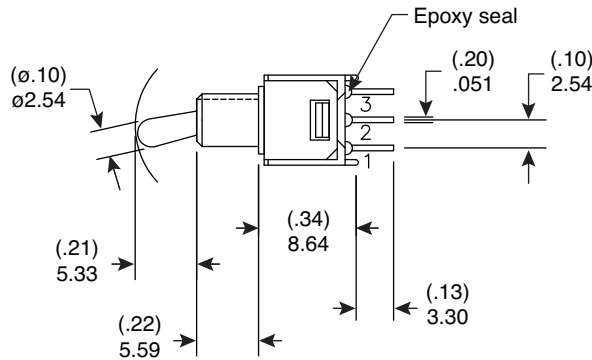



Dimensions: mm (in.)



P.C. Mounting



Mechanical Specifications:

- Mechanical Life: 30,000 make-and-break cycles
- Operating Temperature: -30°C to 85°C

Electrical Specifications:

- Rating: 1A / 250VAC, 3A / 120 VAC or 28 VDC
- Contact Resistance: 20mΩ max. initial @ 2-4VDC 100mA
- Insulation Resistance: 1,000MΩ min.
- Dielectric Strength: 1,000 V RMS@sea level

Materials:

- Case: Diallyl phthalate (DAP)(UL94V-0)
- Actuator: Brass, chrome plated
- Bushing: Brass, nickel plated
- Housing: Stainless Steel
- Switch Support: Brass, tin plated
- Terminals/Contact: Brass, with silver plating

Note:

- RoHS compliant by exemption
- 108-0050-EVX omit 2nd terminal

| Mouser Stock No. | Type | Circuit |
|------------------|---------|---------|
| 108-0050-EVX | 2P SPST | On-Off |
| 108-0051-EVX | 3P SPDT | On-On |

Sub-Miniature Toggle Switches
108-0050-EVX, 108-0051-EVX



Available from Mouser Electronics

www.mouser.com

1-800-346-6873

Specifications are subject to change without notice. No liability or warranty implied by this information. Environmental compliance based on producer documentation.