Last Update: 6-12-06 **Ref. #:** MS-100967

Dimensions: mm (In.)

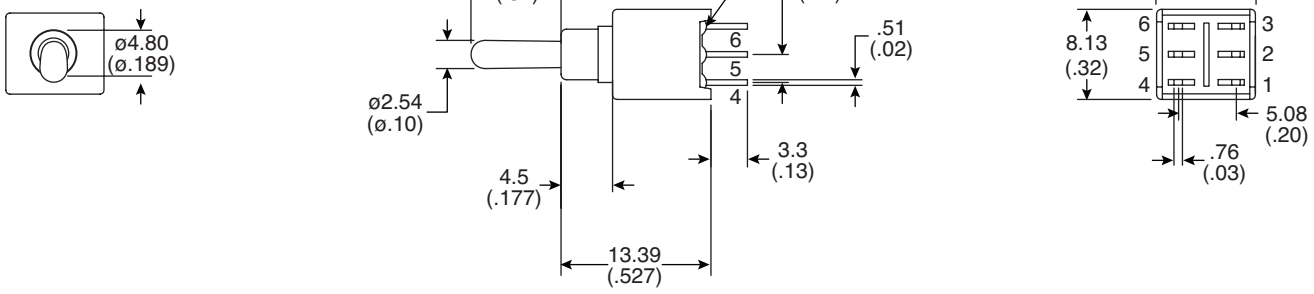



P.C. Mounting

POS.1	POS.2	POS.3
ON	OFF	ON
2-3, 5-6	OPEN	2-1, 5-4
		

Switch Function

Electrical Specifications:

- Contact resistance: 20mΩ max. initial @ 2-4VDC 100mA
- Insulation resistance: 1,000MΩ min.
- Dieletric strength: 1,000 V RMS@sea level
- Rating: 1A / 250VAC; 3A / 120VAC or 28VDC

Mechanical Specifications:

- Mechanical life: 50,000 make-and-break cycles
- Operating temperature: -30°C to 85°C

Note:

- RoHS Compliant by Exemption

Sealed Sub-Miniature Toggle Switch

108-2AD3T3238-EVX

Mountain Switch

Available from Mouser Electronics www.mouser.com 1-800-346-6873

Specifications are subject to change without notice. No liability or warranty implied by this information. Environmental compliance based on producer documentation.

Downloaded from Elcodis.com electronic components distributor