



Dimensions: mm (in)

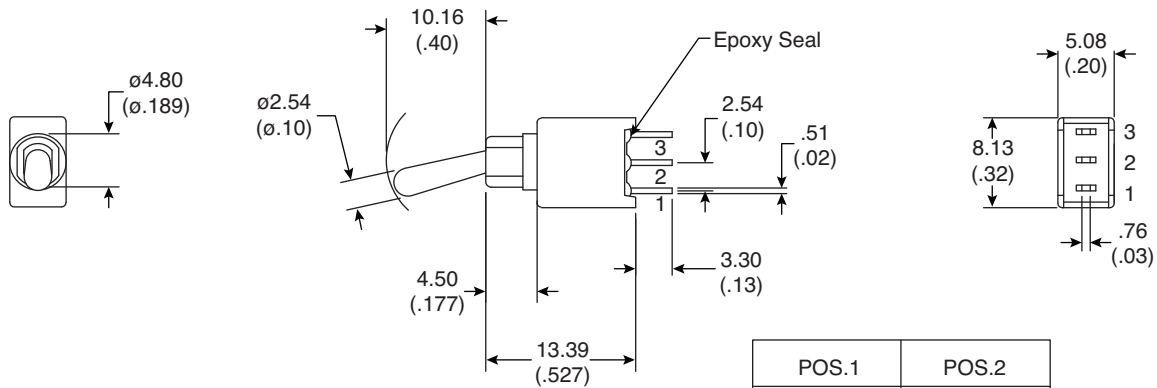

P.C. Mounting

POS.1	POS.2
ON	ON
2-3	2-1

Switch Function

Electrical Specifications:

- Contact Resistance: 20mΩ max. Initial @ 2-4 VDC 100mA
- Insulation Strength: 1000MΩ min
- Dielectric Strength: 1000 V RMS@sea level
- Rating: 1A / 250VAC, 3A / 120VAC or 28 VDC

Mechanical Specifications:

- Mechanical Life: 50,000 make-and break cycles
- Operating Temperature: -30°C to +85°C

Soldering Process:

- Manual Soldering: Use soldering iron of 30 watts, controlled at 350°C approximately 5 sec. while applying solder.
- Wave Soldering: Recommended Soldering Temperature: 260±5°C
Duration of Solder Immersion: 5±1sec. (PCB is 1.6mm in thickness)

Note:

- RoHS Compliant by Exemption

Sealed Sub-Miniature Toggle Switch
 108-2AS3T1205-EVX



Available from Mouser Electronics

www.mouser.com

1-800-346-6873

Specifications are subject to change without notice. No liability or warranty implied by this information. Environmental compliance based on producer documentation.