



Dimensions: mm (in.)

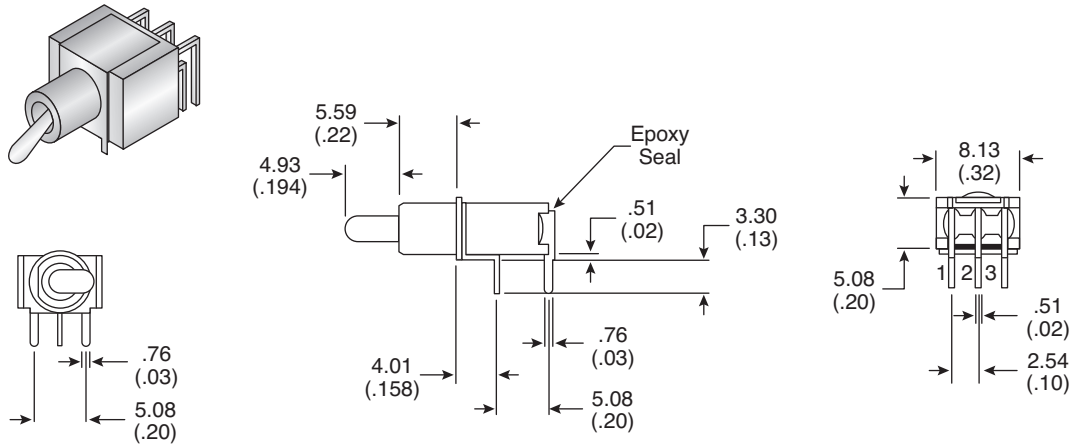


Switch Function

POS.1	POS.2
ON	ON
2-3	2-1



Panel Mounting



P.C. Mounting

**Electrical Specifications:**

- Contact Resistance: 20mΩ max. initial @ 2-4VDC 100mA
- Insulation Resistance: 1,000MΩ min.
- Dielectric Strength: 1,000 V RMS@ sea level.
- Rating:
  - 1A/250 VAC
  - 3A/120 VAC or 28 VDC

**Materials:**

- Case: Diallyl phthalate (DAP) (UL94v-0)
- Acuator: Brass, chrome plated.
- Bushing: Brass, nickel plated.
- Housing: Stainless steel.
- Terminals/Contact: Brass, with silver plate
- Switch Support: Brass, Tin plated.

**Mechanical Specifications:**

- Operating Temperature: -30° C to +85° C.

**Note:**

- RoHS compliant by exemption.

**Toggle Switch**  
108-2MS1T2B2M6QE-EVX

