



Dimensions: mm (In.)

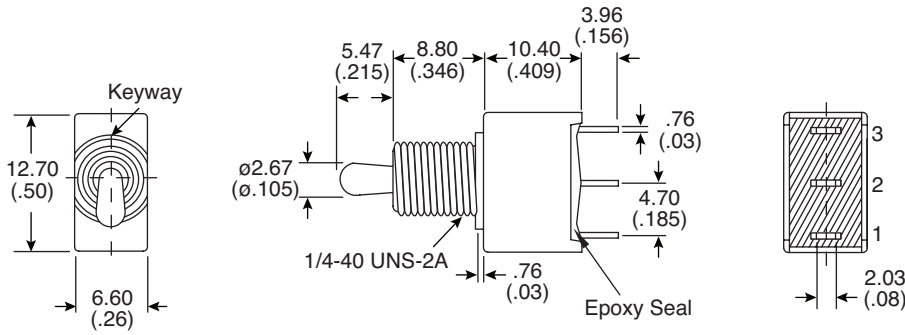


POS.1	POS.2	POS.3
ON	OFF	ON
2-3	OPEN	2-1

Switch Function




Without locking ring



With standard locking ring

Panel Mounting



Solder Lug

Electrical Specifications:

- Contact resistance: 10mΩ typ. initial @ 2-4 V DC, 100mA
- Insulation resistance: 1,000MΩ min.
- Dielectric strength: 1000 V RMS min. @sea level
- Rating: 2A/ 250VAC or 5A/120 VAC or 28 VDC

Mechanical Specifications:

- Mechanical life: 30,000 make-and-break cycles
- Operating temperature: -30°C ± 85°C

Note:

- RoHS Compliant By Exemption

Sealed Miniature Toggle Switch
108-1AS3T2186-EVX



Available from Mouser Electronics

www.mouser.com

1-800-346-6873

Specifications are subject to change without notice. No liability or warranty implied by this information. Environmental compliance based on producer documentation.