



Dimensions: mm (in.)

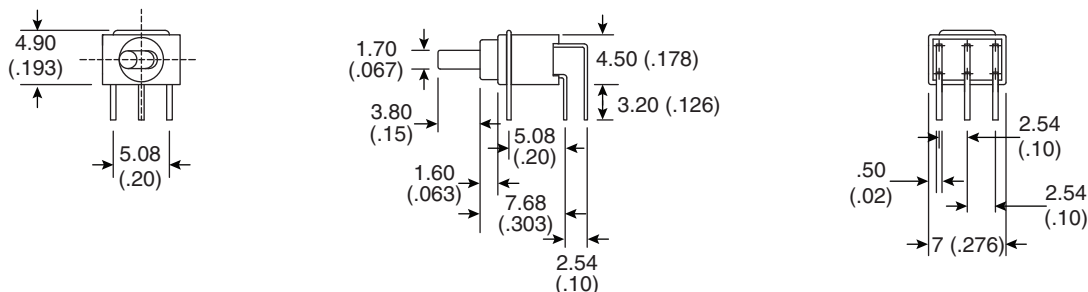

P.C. Mounting

| POS.1 | POS.2 |
|----------|----------|
| | |
| ON | ON |
| 2-3, 5-6 | 2-1, 5-4 |
| | |

Switch Function

Electrical Specifications:

- Contact rating: 0.4 VA max. / 20 V AC or DC max.
- Contact resistance: Below 100 mΩ typ. initial@2-4 V DC, 100 mA
- Insulation resistance: 1,000 MΩ min.
- Dielectric strength: 500 Vrms min. @ sea level

Mechanical Specifications:

- Mechanical life: 40,000 make-and-break cycles
- Operating temperature: -30°C ± 85°C

Note:

- RoHS Compliant

Soldering Process:

- Wave soldering: Recommended soldering temperature: 260±5°C
Duration of solder immersion: 5±1 seconds (PCB is 1.6mm in thickness)

Sealed Ultra-Miniature Toggle Switch
108-2UD1T1662-EV



Available from Mouser Electronics

www.mouser.com

1-800-346-6873

Specifications are subject to change without notice. No liability or warranty implied by this information. Environmental compliance based on producer documentation.