


Dimensions: mm (in.)

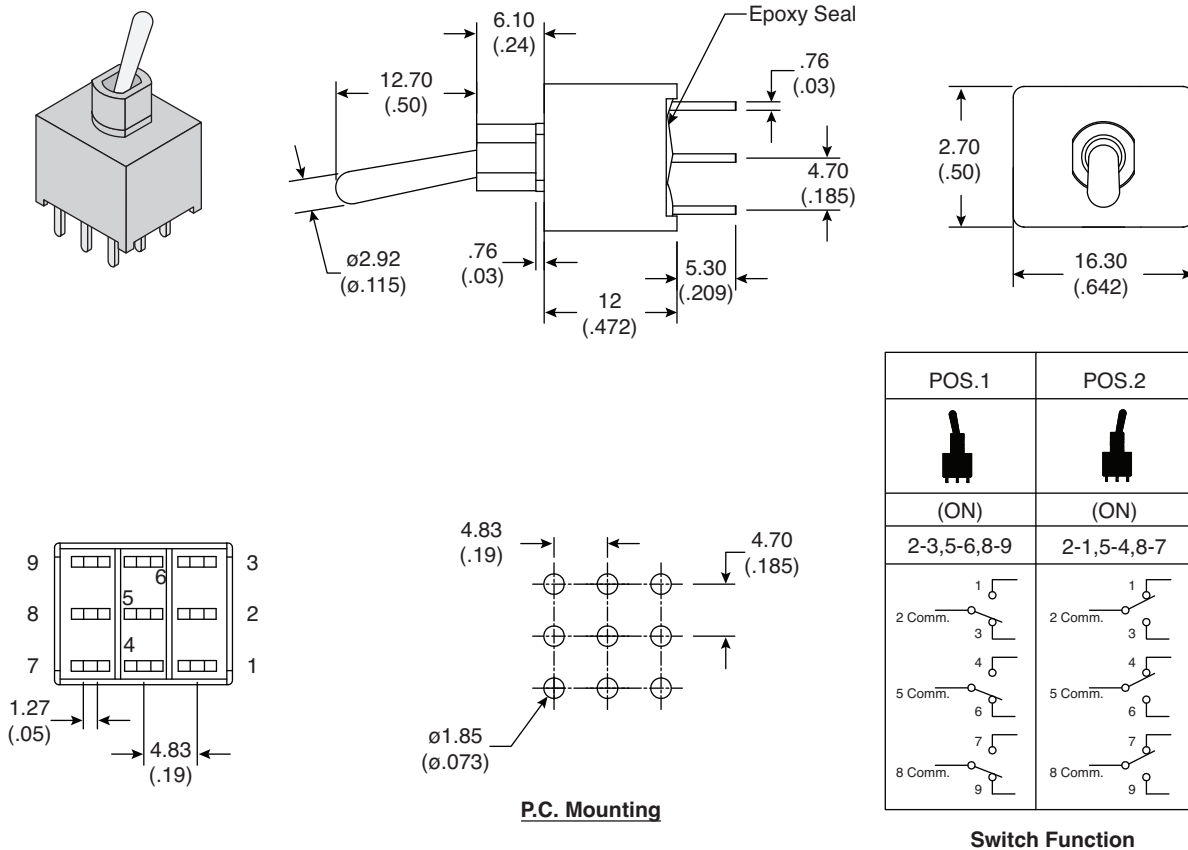

Electrical Specifications:

- Contact resistance: 10m Ω max. initial @ 2-4VDC 100mA
- Insulation resistance: 1,000M Ω min.
- Dielectric strength: 1,000 V RMS@sea level
- Rating: 2A / 250VAC; 5A / 120VAC or 28VDC

Mechanical Specifications:

- Mechanical life: 30,000 make-and-break cycles
- Operating temperature: -30°C to 85°C

Note:

- RoHS Compliant by Exemption

Soldering Process:

- Manual soldering: Use soldering iron of 30W, controlled at 350°C approx. 5 seconds while applying solder
- Wave soldering: Recommended soldering temperature: 260 \pm 5°C
Duration of solder immersion: 5 \pm 1 seconds (PCB is 1.6mm in thickness)

Sealed Miniature Toggle Switch
108-1A34T1283-EVX



Available from Mouser Electronics

www.mouser.com

1-800-346-6873

Specifications are subject to change without notice. No liability or warranty implied by this information. Environmental compliance based on producer documentation.