

- ▶ [Back To Main Products Page](#)
- ▶ [Sensor News](#)
- ▶ [Sensor FAQs](#)
- ▶ [Operating a Speed Sensor](#)
- ▶ [Operating a Reed Sensor](#)
- ▶ [Technical Articles](#)
- ▶ [Find a Rep](#)
- ▶ [Ask a Question](#)
- ▶ [Application Help](#)
- ▶ [Request a Sample](#)
- ▶ [Request a Catalog](#)

Search Site

Check Distributor Stock

## DIGITAL VANE SWITCH

Magnetically activated digital vane switch in a rugged, overmolded plastic housing with three pins or 3-wire harness.

- Available in Two Operating Temperature Ranges
- Immune from Moisture and Dust
- Reliable and Repeatable
- No Mechanical Contacts to Wear Out
- Operate from 5 to 24Vdc
- Reverse Battery Protection to  $\sim$ 24Vdc
- Open Collector Output Compatible with all Logic Families
- Sensor Body Material: Glass-Filled Polyester
- Recommended Vane Parameters
  - Material: Low Carbon,
  - Minimum Dimensions: 0.040" thick,
  - Vane Should Penetrate to a Depth Less Than 0.120" From Bottom of Sensor Slot




[download PDF](#)

## VN1015 SPECIFICATIONS

Part #	Operating Voltage Range (VDC)	Supply Current mA max	Output	Output Saturation Voltage mV max	Output Current mA max	Operate Temp Range, °C	Storage Temp Range, °C	Termination
VN101501	4.5 to 24	6	3 pin sink	400	25	-40 to 85	-40 to 85	pins
VN101502	5 to 24	6	3 pin sink	400	25	-40 to 125	-40 to 125	pins
VN101503	4.5 to 24	6	3-wire sink	400	25	-40 to 85	-40 to 85	24AWG x 150mm leads
VN101504	5 to 24	6	3-wire sink	400	25	-40 to 125	-40 to 125	24AWG x 150mm leads

## Interface recommendations

### OPEN COLLECTOR SINKING BLOCK DIAGRAM

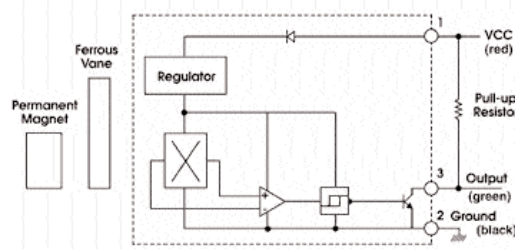

### DIMENSIONS

