

**Last Update:** 8-11-06 **Ref.** #: MS-100910

# Dimensions: mm (In.)

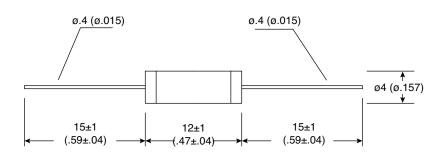

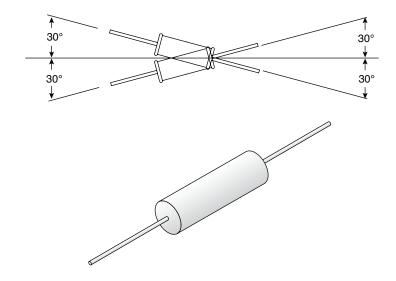

## **Electrical Specifications:**

- Max. Switch Rating: <6mA/24VDC
- Electrical Life Endurance: >50,000 cycles
- Contact Resistance:  $2\Omega$  max. (measured at 45° tilt)

- **Materials:** Switch Housing: Copper coated with gold (10µ)
- Terminal: Copper coated with gold
- Rolling Ball: Copper coated with gold. Ball weighted 0.25g.

## **Mechanical Specifications:**

- Differential Angle: 30° max.
- Operating Temperature: 0°~+100°C

#### **Soldering Process:**

 Temperature: 250°C, 3 seconds (Can be soldered by hand only.)

## Note:

RoHS Compliant

Rolling-Ball Tilt Switch 107-2010-EV



Available from Mouser Electronics

www.mouser.com

1-800-346-6873