


| | |
|-------------------------------------|---|
| Nominal Voltage: | 1.5 V |
| Nominal Internal Impedance: | 136 m-ohm @ 1kHz |
| Average Weight: | 139 gm (4.9 oz.) |
| Volume: | 56.4 cm ³ (3.44 in. ³) |
| Terminals: | Flat |
| Operating Temperature Range: | -20°C to 54°C (-4°F to 130°F) |
| ANSI: | 13A |
| IEC: | LR20 |

TYPICAL DISCHARGE CHARACTERISTICS AT 21°C (70°F)

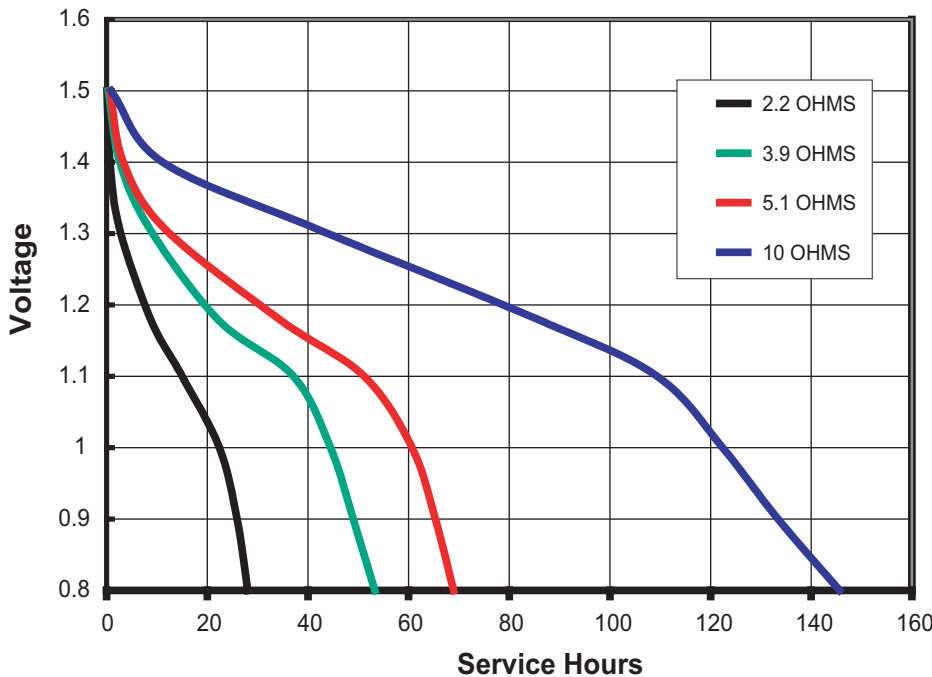

DURACELL®
BATTERIES

Berkshire Corporate Park
Bethel, CT 06801 U.S.A.
Telephone: Toll-free 1-800-544-5454
Internet: www.duracell.com

* Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy / service life that the battery will provide for various load conditions.


DURACELL[®] COPPERTOP[™] MN1300

Alkaline-Manganese Dioxide Battery


Size: D (LR20)

Zn/MnO₂


TYPICAL CONSTANT CURRENT DISCHARGE CHARACTERISTICS AT 21°C (70°F)

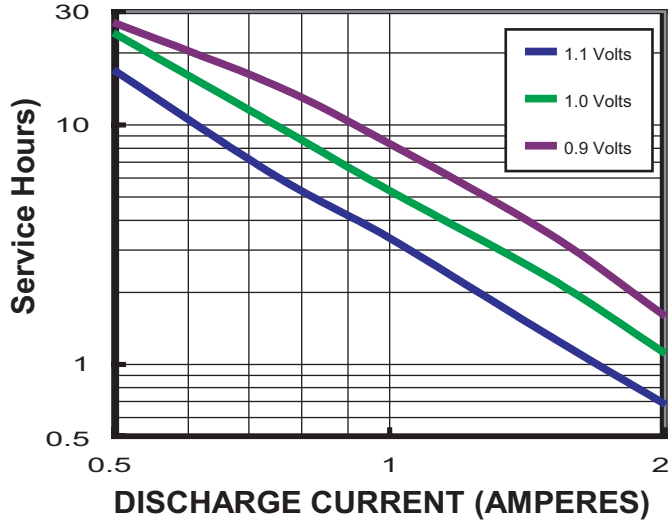

TYPICAL DISCHARGE CHARACTERISTICS AT 21°C (70°F)

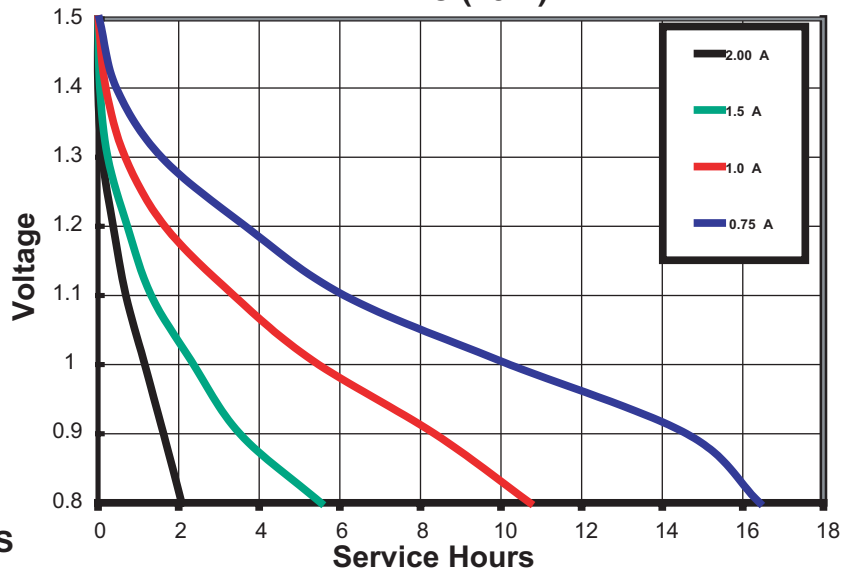

TYPICAL DISCHARGE CHARACTERISTICS AT 21°C (70°F)

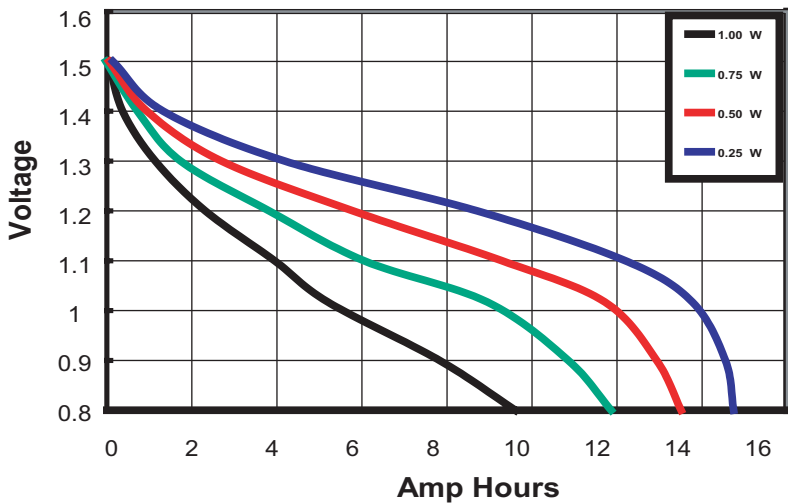

DURACELL[®]
BATTERIES

Berkshire Corporate Park
Bethel, CT 06801 U.S.A.
Telephone: Toll-free 1-800-544-5454
Internet: www.duracell.com

* Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy / service life that the battery will provide for various load conditions.