


Nominal Voltage:	1.5 V
Nominal Internal Impedance:	81 m-ohm @ 1kHz
Average Weight:	24.4 gm (0.86 oz.)
Volume:	8.4 cm ³ (0.51 in. ³)
Terminals:	Flat
Operating Temperature Range:	-20°C to 54°C (-4°F to 130°F)
NEDA/ANSI:	15A
IEC:	LR6


Discharge Characteristics at Various Power Drains

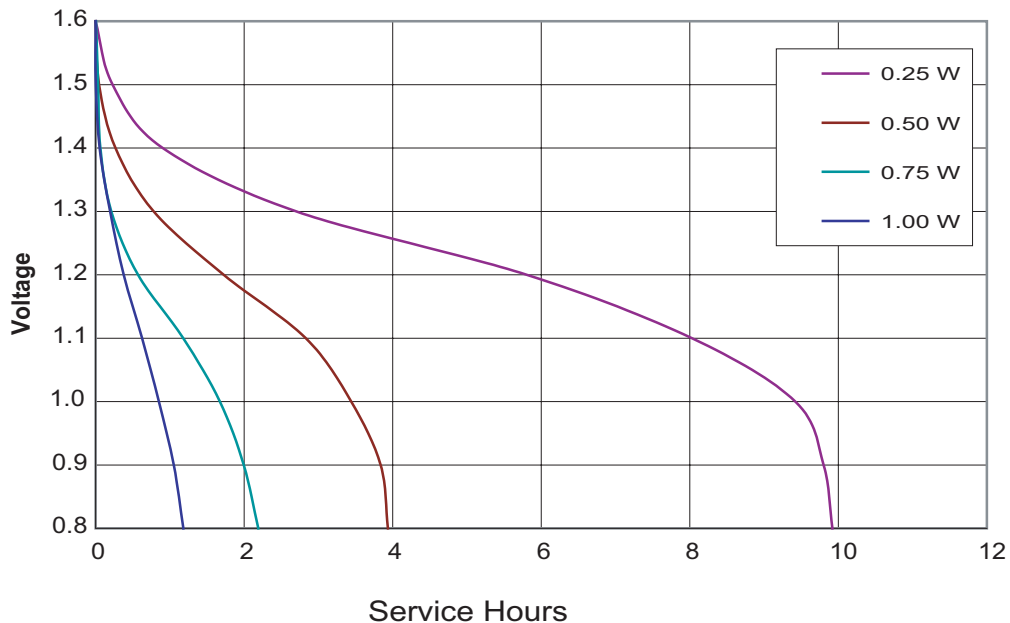


All testing at 21°C (70°F)

* Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy / service life that the battery will provide for various load conditions.


Delivered Energy vs Power Drain

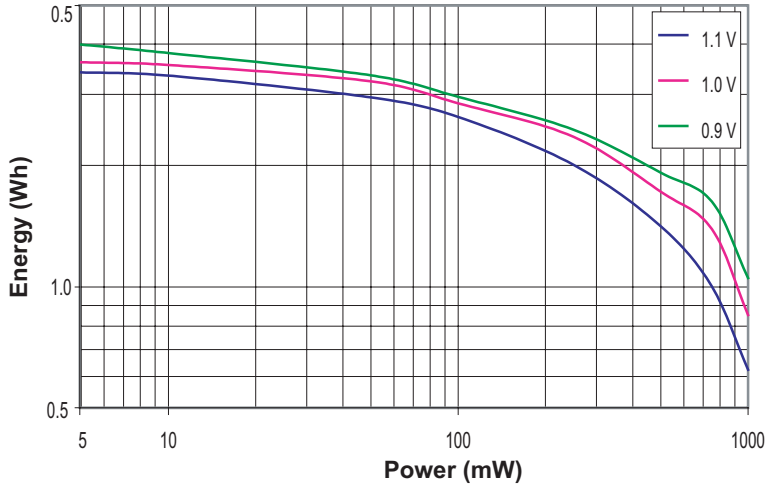

Service Hours vs Power Drain

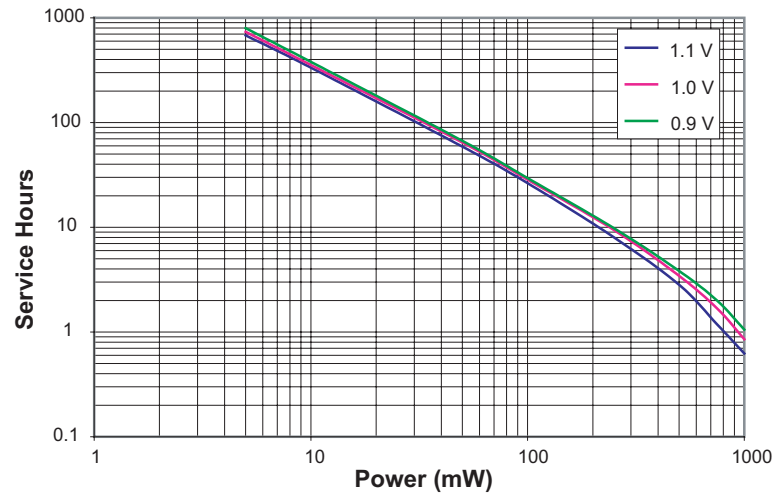

Delivered Capacity vs Power Drain

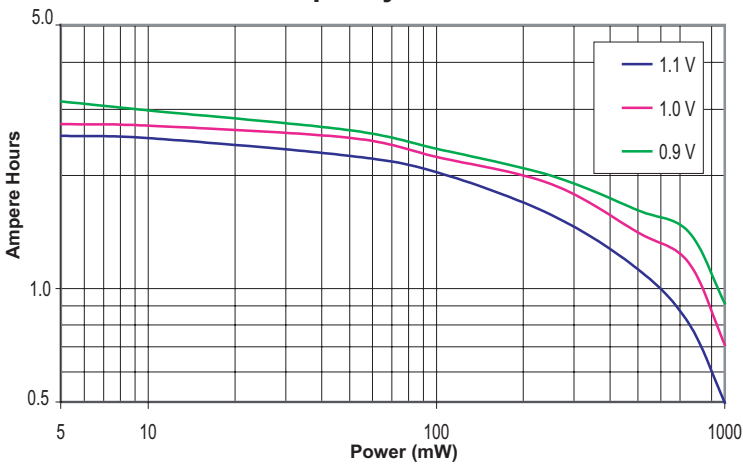

DURACELL®
BATTERIES

Berkshire Corporate Park
Bethel, CT 06801 U.S.A.
Telephone: Toll-free 1-800-544-5454
Internet: www.duracell.com

All testing at 21° C (70° F)

* Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy / service life that the battery will provide for various load conditions.