

GDX Series Right Angle Modular Jack

Features   

- 0.595" Height
- Snap-In Board Retention Tabs
- Panel Stops
- Available in 4, 6 and 8 Position Housings
- UL Recognized File No. E134345
- CSA/NRTL Certified File No. LR78160

Performance Specifications Materials and Finish

Housing Material
PBT Thermoplastic, UL 94V-0 Rated, Black Color
Contact Material
Phosphor Bronze

Electrical Characteristics

Insulation Resistance

500 Megohms Min

Dielectric Withstanding Voltage

1000V AC for 1 Minute

Contact Resistance

20 Milliohms Max

Current Rating

1.5 Amps


MODULAR JACKS AND PLUGS

GDX Series

Documentation & Ordering Information

Kycon Part #	
--------------	--

Part Number Builder



Series

GDX - Right Angle Modular Jack

Shield Option & No of Positions and Contacts

Panel Stops Option	No of Positions and Contacts								
A With Panel Stops	44	62 *	64	66	-	-	88	88K	-
N W/O Panel Stops	-	-	-	-	-	-	-	-	-

* Available only with 50µ" Gold Plating Option


Plating Option

Blank - Nickel Standard

50 - 50µ" Gold Plating

GDX Series Dimensions

Dimensions in In [mm]

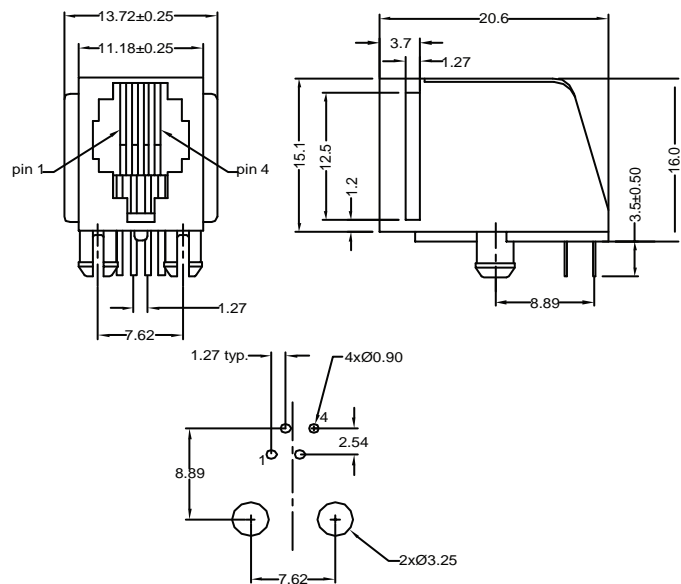

Recommended PCB Layout
(top view)