

## GLX Series Right Angle Modular Jack

### Features



- 0.570" Height
- Snap-In Board Retention Tabs
- Available in 4, 6, 8 and 10 Position Housings
- UL Recognized File No. E134345
- CSA/NRTL Certified File No. LR78160

### Performance Specifications

#### Materials and Finish

Housing Material  
PBT Thermoplastic, UL 94V-0 Rated, Gray Color  
Contact Material  
Phosphor Bronze

### Electrical Characteristics

#### Insulation Resistance

500 Megohms Min

#### Dielectric Withstanding Voltage

1000V AC for 1 Minute

#### Contact Resistance

20 Milliohms Max

#### Current Rating

1.5 Amps


## MODULAR JACKS AND PLUGS

### GLX Series

#### Documentation & Ordering Information


Kycon Part #	
--------------	--

#### Part Number Builder

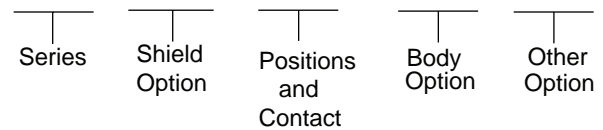

#### Series

GLX - Right Angle Modular Jack

#### Shield Option, Body Option, Number of Positions and Contacts Option

A		N		S		S1	
Non - Shielded with Panel Stops		Non - Shielded w/out Panel Stops		Shielded w/out Panel Stops		Shielded w/Top Panel Stops	
Blank Standard Body	M Short Body	Blank Standard Body	M Short Body	Blank Standard Body	M Short Body	Blank Standard Body	M Short Body
44	—	44	44	—	—	—	—
62	—	62	62	—	—	—	62
64	—	64	64	—	—	—	64
66	—	66	66	—	—	—	66
—	—	—	88	—	88	—	88
—	—	—	1010	—	1010	—	1010

#### Other Option

##### Plating Option:

Blank - Gold Flash  
50 - 50µ" Gold Plating

##### Color Option

Standard - Gray  
BLK - Black

Contact kycon for High Temp and More options

### GLX Series Dimensions

Dimensions in mm

