


Materials and Finish

Housing Material:
PBT thermoplastic,
UL 94V-0 rated,
Contact Material:
phosphor bronze
Contact Plating Options:
Standard: gold flash over
nickel on entire contact
15: 15u" gold over
nickel on entire contact
50: 50u" gold over
nickel on entire contact to
comply with FCC Requirements
under No. 47 C.F.R. Part 68,
Subpart F

Electrical Characteristics

Current Rating-
1.5 Amps
Voltage Rating-
125V DC
Insulation Resistance-
500 Megohms min.
Dielectric Withstanding Voltage-
1000V rms, 60Hz
Contact Resistance-
20 milliohms max.

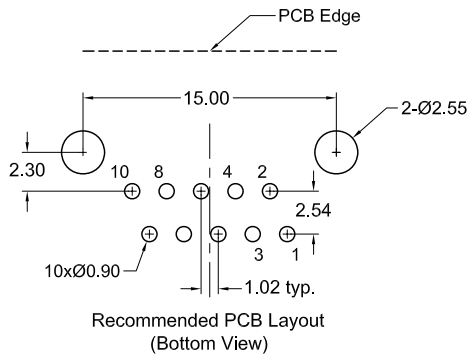

Part Number	Contact Area Plating Finish	Color
GLX-N-1010M	Gold Flash (standard)	Grey
GLX-N-1010M-15	15u" Gold (15 option)	Grey
GLX-N-1010M-50	50u" Gold (50 option)	Grey
GLX-N-1010M-BLK	Gold Flash (standard)	Black



Tolerances
X.X ± 0.25
X.XX ± 0.15
Unless Stated Otherwise

REV.	DATE	DESCRIPTION	REV. BY	CHK. BY	DRAWN BY	DATE
A0	9/16/05	New Drawing	R. Aguirre	N.Chang	R. Aguirre	9/16/05
A1	2/8/08	ECO# 08-001	R. Aguirre	H, MA		
A2	02/27/09	ECO# 08-023	S. Vien	H, MA		
A3	06/05/09	correct PCB top view to B.	S. Vien	H, MA		
A4	05/13/10	ECO #10-025	S. Vien	H, MA		
A5	05/20/10	ECO #10-028	S. Vien	H, MA		

GLX-N-1010M

UNITS
mm

Right Angle Thru-Hole Modular Jack, RoHS Compliant
10 position, 10 contacts, short body

