


# PCB Modular Jacks



154-UL6441, 154-UL6641, 154-UL6661, 154-UL6881

PCB Modular Jacks

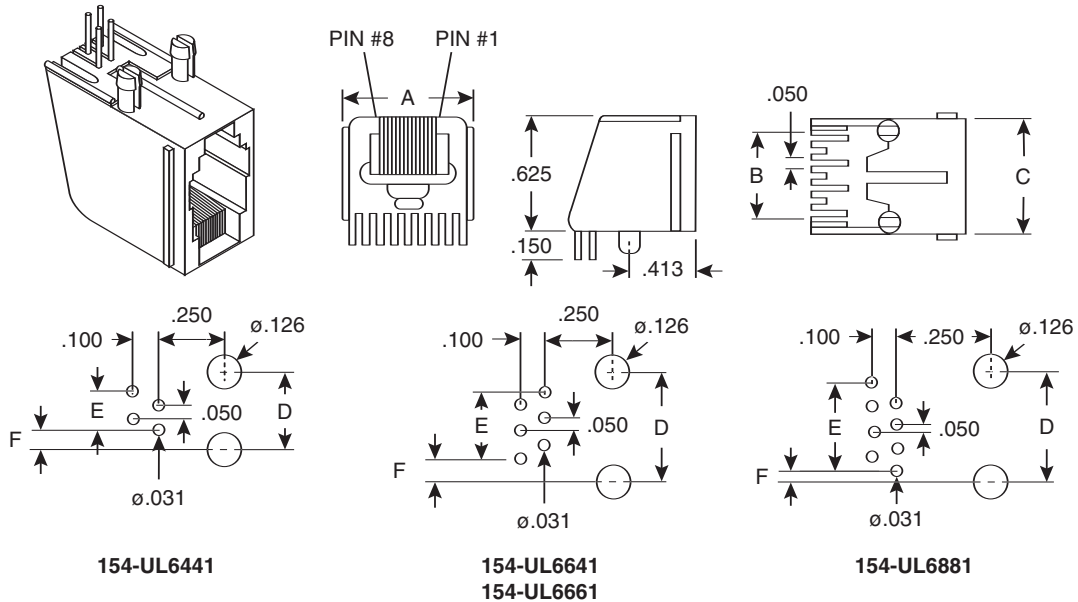

Dimensions: In.

MOUSER STOCK NO.	Dimensions (In)					
	A	B	C	D	E	F
154-UL6441	.540	.150	.440	.300	.150	.075
154-UL6641	.620	.250	.520	.400	.250	.075
154-UL6661	.620	.250	.520	.400	.250	.075
154-UL6881	.700	.350	.600	.450	.350	.050

SPECIFICATIONS	
Type:	Flanged PCB Modular
Housing:	25% Glass Filled Nylon, UL 94V-0
Contact:	50μ Gold Over Nickel Plated, .014" Phosphor Bronze
Current Rating:	1.5A
Voltage Rating:	150V max.
Breakdown Voltage:	500VAC for 1 Minute
Insulation Resistance:	10MΩ
UL File No.:	EI35545(N)
Meets Requirements:	UL1863-96, FCC, FCR 47 Part 68

Date Last Revised: 4-21-05

Available from Mouser Electronics  
 1-800-346-6873  
 www.mouser.com

KC-300616

154-UL6441, 154-UL6641, 154-UL6661, 154-UL6881

Specifications are subject to change without notice. No liability or warranty implied by this information. Environmental compliance based on producer documentation.