


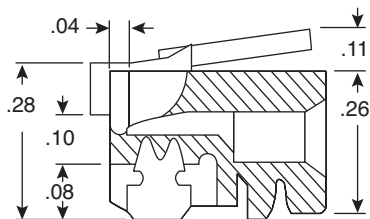


Modular Phone Plugs

154-UL6234, 154-UL6236

KOBICONN

Modular Phone Plugs



DIMENSIONS IN

SPECIFICATIONS

| | |
|--|--|
| USOC Type: | RJ11 (154-UL6234); RJ12 (154-UL6236) |
| Western Electric Type: | 623 (4 or 6 Conductor for telephone to wall use) |
| Color: | Clear |
| Positions-Contacts: | 6-4 (154-UL6234); 6-6 (154-UL6236) |
| Housing Material: | Polycarbonate (pc) |
| Contact Blade: | High strength copper alloy |
| Contact: | 8% phosphor alloy |
| Insulation Resistance: | 250VAC (max.) @ 2A 500MΩ |
| Dielectric Withstand Voltage: | 500VAC for 1 minute |
| Termination Resistance: | 35mΩ (max.) |
| Tolerance: | .006 |
| Cable-to-Plug Tensile Strength: | 20 lbs. (89N) min. |
| Durability: | 200 mating cycles |
| Operating Temperature: | -40°C to +125°C |

Date Last Revised: 10-15-05

Available from Mouser Electronics
1-800-346-6873
www.mouser.com

KC-300630

154-UL6234, 154-UL6236