


# PCB Modular Jack

## 154-UL6882



PCB Modular Jack

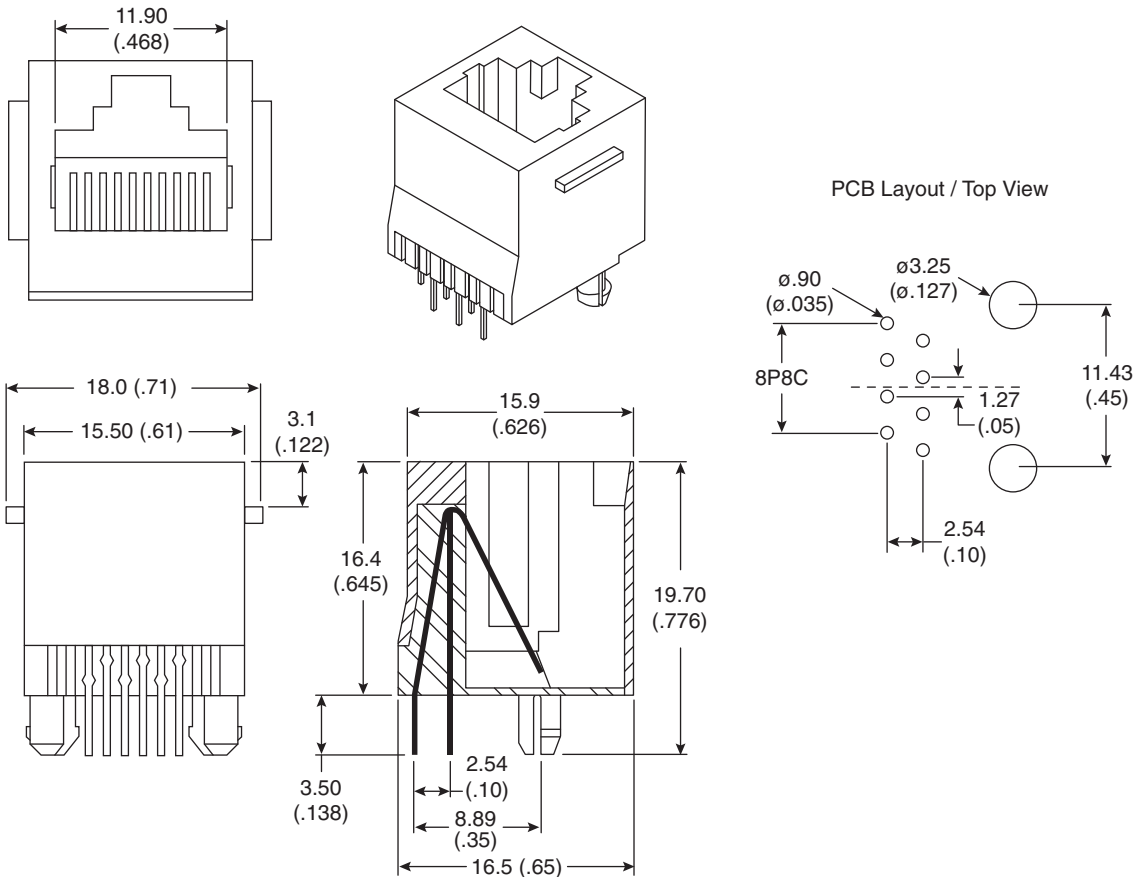

Dimensions: mm (in.)

SPECIFICATIONS	
<b>Type:</b>	8P8C modular with PCB leads
<b>Rating:</b>	125V, 1.5A
<b>Dielectric withstand voltage:</b>	1000VAC 60Hz
<b>Contact resistance:</b>	30m $\Omega$ max.
<b>Insulation resistance:</b>	500M $\Omega$ min.
<b>Insertion force:</b>	900g
<b>Housing:</b>	15% glass filled PBT, Black
<b>Contacts:</b>	0.35mm thickness phosphor bronze, gold plated over nickel on contact area, tin plated over nickel on solder area.
<b>Temperature:</b>	-40~80°C
<b>Durability:</b>	500 cycles min.

Date Last Revised: 6/1/10

Available from Mouser Electronics  
1-800-346-6873 / [www.mouser.com](http://www.mouser.com)

KC-300625

154-UL6882

Specifications are subject to change without notice. No liability or warranty implied by this information. Environmental compliance based on producer documentation.