


EC7BW

20 WATT 4:1 INPUT RANGE DC-DC CONVERTERS



Features

- 20W Isolated Output
- 4:1 Wide Input Range
- Efficiency to 90%
- Regulated Outputs
- Continuous Short Circuit Protection
- Pi Input Filter




NEW

MODEL NUMBER	INPUT VOLTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT		INPUT CURRENT		% EFF.	SIZE
			MIN.	MAX.	NO LOAD	FULL LOAD		
EC7BW-24533	9-36 VDC	3.3 VDC	0mA	5500mA	55mA	869mA	87	2" x 1"
EC7BW-24505	9-36 VDC	5 VDC	0mA	4000mA	55mA	926mA	90	
EC7BW-24512	9-36 VDC	12 VDC	0mA	1670mA	55mA	928mA	90	
EC7BW-24515	9-36 VDC	15 VDC	0mA	1330mA	55mA	924mA	90	
EC7BW-48533	18-75 VDC	3.3 VDC	0mA	5500mA	25mA	430mA	88	2" x 1"
EC7BW-48505	18-75 VDC	5 VDC	0mA	4000mA	25mA	463mA	90	
EC7BW-48512	18-75 VDC	12 VDC	0mA	1670mA	25mA	464mA	90	
EC7BW-48515	18-75 VDC	15 VDC	0mA	1330mA	25mA	462mA	90	

NOTE: 1. Nominal Input Voltage 24, 48 VDC


Specifications	
INPUT SPECIFICATIONS:	
Input Voltage Range.....	24V.....9.36V
48V.....18.75V	
Under Voltage lockout.....	24Vin Power Up.....8.8V Typ.
48Vin Power Down.....	8.0V Typ.
24Vin Power Up.....	17V Typ.
48Vin Power Down.....	1.6V Typ.
Positive Logic Remote ON/OFF (see note 3 & 4)	
Input Filter.....	Pi Type
OUTPUT SPECIFICATIONS:	
Voltage Accuracy.....	±1.5% max.
Transient Response: 75% - 100% Step Load Change	
Error Band.....	±5% Vout Nominal, Recovery Time.....<500us
Ripple & Noise, 20MHz BW (Measured with 0.1µF MLCC).....	75mV pk-pk, max.
Temperature Coefficient.....	±0.03%/°C
Line Regulation.....	±0.2% max.
Load Regulation.....	±1.0% max.
Over Voltage Protection.....	Zener or TVS Clamp
Output Short Circuit Protection.....	Continuous
External Trim Adj. Range.....	±10%
GENERAL SPECIFICATIONS:	
Efficiency.....	See Table
Isolation Voltage.....	Input/Output.....1500VDC max.
Isolation Resistance.....	10 ⁹ Ohms min.
Switching Frequency.....	350KHz, Typical
EMI/RFI.....	Six Sided Continuous Shield
Operating Ambient Temperature.....	-40°C to +85°C
De-Rating: Above 60°C.....	Linearly to Zero Power at 100°C
Case Temperature.....	100°C max.
Storage Temperature.....	-55°C to +125°C
Dimensions.....	2.00 x 1.00 x 0.40 inches (50.8 x 25.4 x 10.2mm)
Case Material.....	Black Coated Copper with Non-Conductive Base
Weight.....	35g

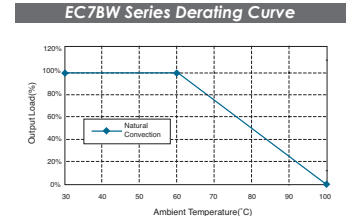

NOTE:

1. Measured From High Line to Low Line
2. Measured From Full Load to 10% Load
3. Logic Compatibility.....CMOS or Open Collector (TL, rel. to: Vin Module On.....+3.3VDC or Open Circuit Module Off.....<1.2VDC
4. Suffix 'N' to the Model Number with Negative Logic Remote ON/OFF Module On.....<1.2VDC Module Off.....+3.3VDC or Open Circuit
5. Suffix 'S' to the Model Number with Alternative Pin Configuration, Single output models only
6. Maximum case temperature under any operating condition should not exceed 100°C

PIN CONNECTION	
Pin	Function
1	+V Input
2	-V Input
3	+V Output
4	Trim
5	-V Output
6	Remote ON/OFF

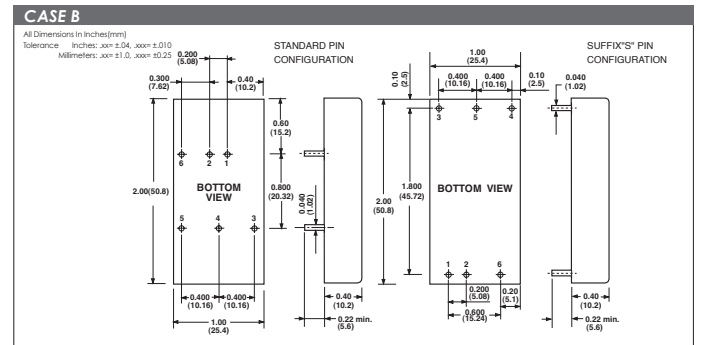

All Specifications Typical At Nominal Line, Full Load and 25°C Unless Otherwise Noted.