

LPT50-M Series

55 Watts

Total Power: 47 - 55 Watts
Input Voltage: 90 - 264 VAC
127 - 300 VDC
of Outputs: Triple



Special Features

- Medical Safety Approvals
- Universal input
- 2" x 4" footprint
- Less than 1U high
- Overpower and short circuit protection
- High efficiency
- High MTBF
- Built in EMI filter (CISPR 22 Class B)
- LED power good indicator
- Input power < 74 watts
- Complies with EN61000-3-2
- 85 kHz switching frequency
- Dual AC fuses
- UL Class I approved
- LPX50 enclosure kit available

Safety

- **UL:** UL 60601-1
- **CSA:** CSA-C22.2 No. 601.1-M90
- **VDE:** EN60601-1
- **CE:** LVD

Electrical Specifications

Input

| | |
|--------------------------------|---|
| Input range: | 90 - 264 VAC (wide range) 127-300 Vdc |
| Frequency: | 47-440 Hz |
| Inrush current: | < 60 A peak @ 230 VAC, cold start @ 25 °C |
| Efficiency: | 80% typical at full load |
| EMI/RFI: | FCC Class B conducted; CISPR 22 Class B conducted; EN55022 Class B conducted, EN60601-1-2 |
| Safety ground leakage current: | 275uA @ 50/60 Hz; 264 VAC input |

Output

| | |
|-------------------------|--|
| Maximum power: | 55 W for convection (LPT51, 47.4 W) |
| Hold-up time: | 10/20 ms 115/230 VAC input line |
| Overpower protection: | Short circuit protection on all outputs. Case overpower protected @ 110-160% of normal rating |
| Overvoltage protection: | 30-50% above nominal output |

Environmental Specifications

| | |
|---------------------------------|---|
| Operating temperature: | 0° to 50 °C ambient. Derate each output as 2.5% per degree from 50° to 70 °C. -20 °C start up |
| Storage temperature: | -40 °C to +85 °C |
| Electromagnetic susceptibility: | Designed to meet EN61000-4; -2, -3, -4, -5, -6, -8, -11 Level 3 |
| Humidity: | Operating; non-condensing 10% to 95% RH |
| Vibration: | IEC68-2-6 to the levels of IEC721-3-2 |
| MTBF demonstrated: | > 550,000 hours at full load and 25 °C ambient conditions |



Ordering Information

| Model Number | Output Voltage | Minimum Load | Maximum Load with Convection Cooling | Peak Load ¹ | Regulation ² | Ripple P/P (PARD) ³ |
|--------------|----------------|--------------|--------------------------------------|------------------------|-------------------------|--------------------------------|
| LPT51-M | +3.3 V | 0.8 A | 8 A | 9 A | ±2% | 50 mV |
| | +5 V | 0.1 A | 3 A | 4 A | ±6% | 50 mV |
| | +12 V | 0 A | 0.5 A | 1 A | ±5% | 120 mV |
| LPT52-M | +5 V | 0.5 A | 8 A | 9 A | ±2% | 50 mV |
| | +12 V | 0.1 A | 3 A | 4 A | ±5% | 120 mV |
| | -12 V | 0 A | 0.5 A | 1 A | ±5% | 120 mV |
| LPT53-M | +5 V | 0.5 A | 8 A | 9 A | ±2% | 50 mV |
| | +15 V | 0.1 A | 2.4 A | 3.2 A | ±5% | 150 mV |
| | -15 V | 0 A | 0.5 A | 0.7 A | ±5% | 150 mV |
| LPT54-M | +5 V | 0.5 A | 8 A | 9 A | ±2% | 50 mV |
| | +24 V | 0.1 A | 1.5 A | 2 A | ±7% | 240 mV |
| | +12 V | 0 A | 0.5 A | 0.7 A | ±5% | 120 mV |

1. Peak current lasting < 15 seconds with a maximum 10% duty cycle.
2. At 25 °C including initial tolerance, line voltage, load currents and output voltages adjusted to factory settings.
3. Peak-to-peak with 20 MHz bandwidth and 10 µF (tantalum capacitor) in parallel with a 0.1 µF capacitor at rated line voltage and load ranges.

Pin Assignments

| | LPT51-M | LPT52-M | LPT53-M | LPT54-M |
|-------|---------|---------|---------|---------|
| SK1-1 | Line | Line | Line | Line |
| SK1-3 | Neutral | Neutral | Neutral | Neutral |
| SK2-1 | +3.3 V | +5 V | +5 V | +5 V |
| SK2-2 | +3.3 V | +5 V | +5 V | +5 V |
| SK2-3 | Common | Common | Common | Common |
| SK2-4 | Common | Common | Common | Common |
| SK2-5 | +12 V | -12 V | -15 V | +12 V |
| SK2-6 | 5 V | +12 V | +15 V | +24 V |

Mating Connectors

AC Input: Molex 09-50-8031 (USA)
09-91-0300 (UK)
PINS: 08-52-0113



DC Outputs: Molex 09-50-8061 (USA)
09-91-0600 (UK)
PINS: 08-52-0113

Emerson Network Power Connector Kit #70-841-006, includes all of the above

Notes:

1. Specifications subject to change without notice.
2. All dimensions in inches (mm), tolerance is ±0.02" (±0.5mm)
3. Mounting holes M1 and M2 should be grounded for EMI purposes.
4. Mounting hole M1 is safety ground connection.
5. Specifications are for convection rating at factory settings at 115 VAC input, 25 °C unless otherwise stated.
6. Warranty: 2 year
7. Weight: 0.45 lbs/0.20 kg

Mechanical Drawing

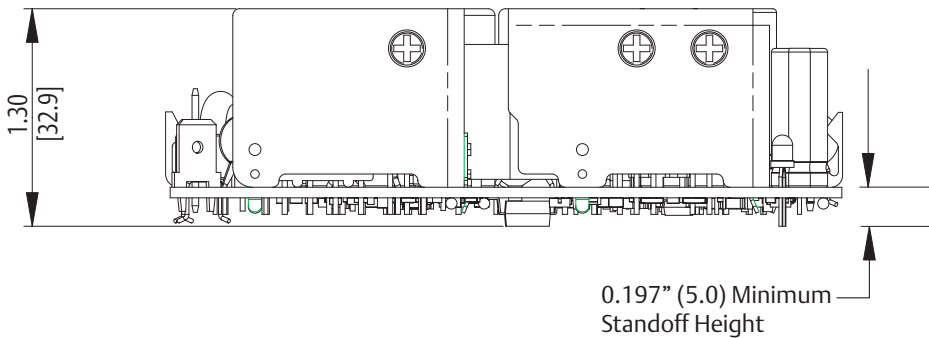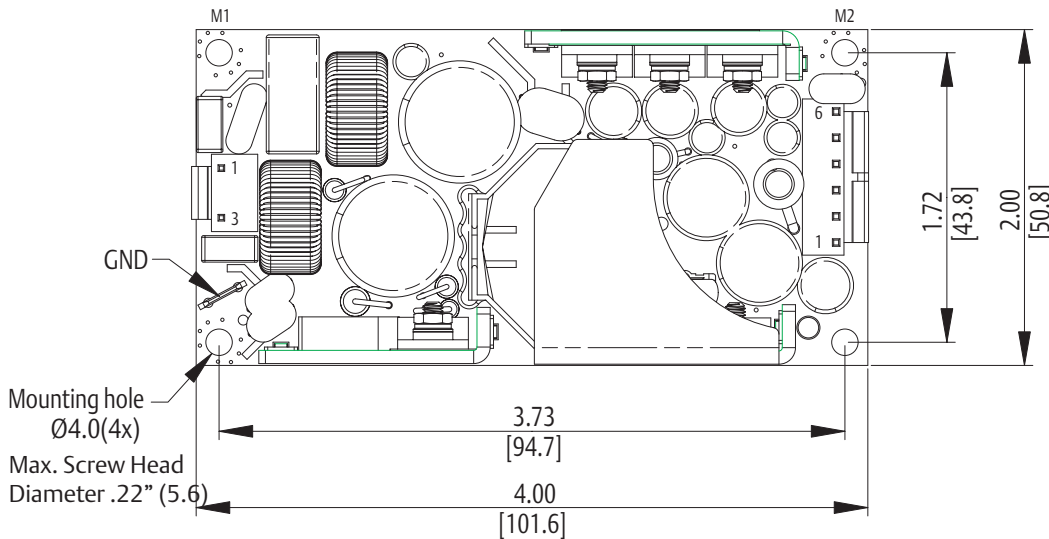

Americas

5810 Van Allen Way
Carlsbad, CA 92008
USA
Telephone: +1 760 930 4600
Facsimile: +1 760 930 0698

Europe (UK)

Waterfront Business Park
Merry Hill, Dudley
West Midlands, DY5 1LX
United Kingdom
Telephone: +44 (0) 1384 842 211
Facsimile: +44 (0) 1384 843 355

Asia (HK)

14/F, Lu Plaza
2 Wing Yip Street
Kwun Tong, Kowloon
Hong Kong
Telephone: +852 2176 3333
Facsimile: +852 2176 3888

For global contact, visit:

www.PowerConversion.com
techsupport.embeddedpower@emerson.com

While every precaution has been taken to ensure accuracy and completeness in this literature, Emerson Network Power assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions.

Emerson Network Power.
The global leader in enabling
business-critical continuity.

- AC Power
- Connectivity
- DC Power
- Embedded Computing
- **Embedded Power**
- Monitoring
- Outside Plant
- Power Switching & Controls
- Precision Cooling
- Racks & Integrated Cabinets
- Services
- Surge Protection

EmersonNetworkPower.com

Emerson Network Power and the Emerson Network Power logo are trademarks and service marks of Emerson Electric Co. ©2008 Emerson Electric Co.