








AC Adapter 24VAC/500mA

412-224054



Dimensions: in.
(except where noted)

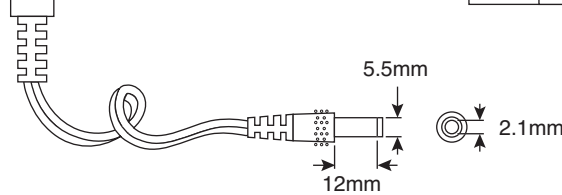

File No. E175399

■ SPECIFICATIONS:

- Primary voltage: 120VAC 60Hz
- Primary exciting current, open circuit: 50mA max. (no load), 100mA max. (loaded)
- Primary DC resistance $\pm 15\%$: 127Ω
- Secondary loaded voltage: 24VAC 500mA
- Secondary DC resistance $\pm 10\%$: 4.6Ω
- Insulation resistance: $100M\Omega @ 500VDC$
- Dielectric strength: 500VAC for 1 minute
- Polarity: center positive
- Output cord length: 6ft.

Specifications are subject to change without notice. No liability or warranty implied by this information. Environmental compliance based on producer documentation.

XICON PASSIVE COMPONENTS • (800) 628-0544



XC-600193

Date Revised: 6/20/07