

INDUSTRIAL COMPONENTS

Product Selector 2004/2005



- Electromechanical relays
- Timers
- Counters
- Programmable relays
- Level and leakage controllers
- Industrial switches
- Pushbutton switches
- Low voltage switch gear
- Temperature controllers
- Solid state relays
- Digital panel indicators
- Power supplies
- Sockets

Advanced Industrial Automation

OMRON

How to order industrial component products from Omron

Omron manufactures a very wide range of industrial components and each product, or variation of a product, has a specific ordering code which must be specified correctly when ordering. This catalog is organized to help you choose the right product for the job and construct the correct ordering code.

- **Product family introduction** Describes the available range within a family.
- **Product comparison table** Contains all available product variations from Omron's wide selection. Use to choose the right product for the application.
- **Product specific ordering code tables** For constructing the ordering codes according to specifications and options required.

An example ordering code: **E5GN-Q03TC-FLK-500ACDC24**

Example product

Model	24 x 48 mm	E5GN -	Q ^{*1}			03	TC	-FLK	-500	ACDC24
	48 x 48 mm	E5CN -							-500	
<i>In-panel, DIN-rail mounted</i>	48 x 48 mm	E5CN -					T		-500	U
	96 x 48 mm	E5EN -		3					-500	
	96 x 96 mm	E5AN -		3					-500	

Output type: Relay (R), Voltage (for driving SSR) (Q)

Number of alarms: No alarm (STANDARD), One alarm (1, 1, 1)

Communications: No communications function (STANDARD), RS-485 & serial communications (03, -FLK)

Input type: Thermocouple (TC), Platinum resistance thermometer (Pt100) (P), Temperature (thermocouple and Pt100) (T)

Options: With terminal cover (-500), DIN-rail mounted, in-panel type (U)

Input voltage: 100 to 240 VAC (AC100-240), 24 VAC/VDC (ACDC24)














Ordering code: **E5GN-Q03TC-FLK-500ACDC24**

- The code starts here.
- *1 refers to the note at the bottom of the table. The box may be filled with a choice of relay or voltage, in this case the Q for voltage.
- 'No alarm' has been chosen. This choice box has no code so the box remains empty (so also no space, or dash (-) either).
- RS-485 & serial communications with the codes 03 and FLK has been chosen: both should be used in the code. Double codes are joined with an arrow.
- A thermocouple with the code TC has been chosen and entered into the code.
- A fixed element of the code that should always be included.
- The choice of input voltage with the code 24AC/DC has been chosen and entered.
- The ordering code is complete.

- White box: to be filled with code information from table.
- White box with *1: refers to the note at the bottom of the table.
- Colored areas: no option, not to be filled. Color refers to product comparison table.
- M Colored areas with information: standard option to be included in code.
- Empty box (standard).
- ← Double codes, joined by an arrow, both should be used in the ordering code if an option is chosen.
- ↑ Choose an option and fill in on top in this box:

*1 Voltage can only be used by 24x28mm and 48x48mm models.

Contents

	Electromechanical relays	11
	Timers	17
	Counters	25
	Programmable relays	31
	Level and leakage controllers	35
	Industrial switches	39
	Pushbutton switches	53
	Low voltage switch gear	63
	Temperature controllers	71
	Solid state relays	79
	Digital panel indicators	85
	Power supplies	93
	Sockets	99

OMRON ADVANCED INDUSTRIAL AUTOMATION

Today's industrial manufacturers are constantly faced with new challenges posed by ever increasing demands on performance, quality and cost. In an environment where every movement, every component and every assembly operation must be immediately and automatically recorded, checked and documented for maximum efficiency, Omron can provide the solution.

Omron's industrial automation product range includes optical sensors and measuring systems, high-speed industrial-grade image processing systems, controlling and switching devices, highly dynamic drives and product tracking systems for information interchange, all of which meet today's industrial automation challenges.

Omron also caters to the logistics and information processing sectors by developing advanced network and field bus systems, which ensure that relevant data collected in the field by sensors and other equipment can be easily accessed and analyzed by production managers through standard Office applications.


Omron is your one-stop shop for future-oriented products matched to perform in perfect unison. We are constantly developing new products and enhancing existing ones. Each year sees the introduction of at least 20 new product ranges in industrial components, safety engineering, sensors, image processing, drives and automation systems.

Our close relations with customers and partners in industry mean we are well-positioned to quickly identify new trends which we can incorporate in the development of our own new products. In this, we are helped by our Research and Development (R&D) Centers and our highly efficient production sites in the major regions of the world. With such distributed facilities, Omron can achieve customer-specific solutions and modifications with a very short time to market.

In fact our customers see us more as joint developers for their own machinery and plant and as solution providers for their increasingly complex automation requirements, while we see our customers as providing the product ideas and development impetus so vital to our own future. It's a partnership that works very well on both sides.

You too can choose such a partnership.
Choose Advanced Technology & Services – choose Omron.

NEW PRODUCT SOLUTIONS

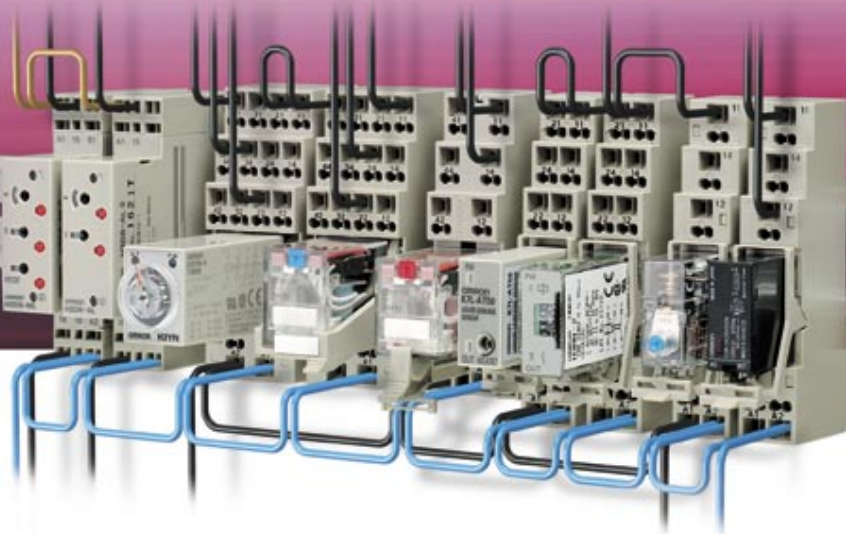

Screw-Less Clamp solutions

Omron is the first manufacturer to use SLC (Screw-Less Clamp) technology in a standard socket for industrial relays. These SLC sockets offer significant savings on material (crimp terminals) and wiring time. There's no over- or under-tightening of the cable connection, so better contact reliability is always achieved. Omron's sockets can be used with solid or stranded wire, with or without crimped terminals. Double wiring and easy bridge and branch connections are all possible on all terminals. And because each socket is wired from the top instead of the side, the cable troughs can be mounted directly at the socket, saving space in the switch cabinet.

The use of SLC technology also eliminates the need to check clamp screws regularly in case they need tightening. Omron has designed a complete range of timers with Screw-Less Clamps, as well as sockets for a wide range of relays, timers and controllers. When used in combination with associated products these sockets guarantee safe switching and meet the most demanding specifications. In addition, a unique ejector in each socket makes product replacement very easy.

Unique 1-2-3 step wiring process!

The timer and socket's unique mechanism uses no screws, so there's no time wasted turning screws during wiring. Just three steps are required:

1. Insert the screwdriver
2. Insert the wire
3. Withdraw the screwdriver

This procedure takes less than half the conventional wiring time, and is much more reliable!

How Omron's SLC technology works!



Unique 1-2-3 step wiring process!

NEW PRODUCT SOLUTIONS



E5CN - the best temperature controller around

Omron's E5CN was the first temperature controller to offer the high-clarity, back-lit LCD display with color change technology in a 1/16 DIN format. Now Omron has brought this world's best-selling controller to the next level. The E5CN display shows not only the process value in large, 11mm digits, it also has a tri-color back-lit matrix that produces red, green and orange.

These colors can be configured to occur on events such as an alarm condition or out-of-band warning. The new E5CN can be automatically tuned to give the maximum control performance, and thanks to Omron's unique 2-PID control, this applies to both approach-to-set value and response-to-disturbance. The benefits of this over normal PID include faster start-up times and improved response, which means that the quality of the end product can be maintained in changing circumstances. The user doesn't have to take any special action; the controller's built-in technology does all the work! Many features have been further improved along with the introduction of some innovative technologies that users will greatly appreciate.

Color change - the new display characteristics

Omron has a range of panel instruments where the process value color visualizes the status of a process. This unique function alerts any member of staff to an alarm condition by changing the display color from green to red or vice versa. The display colors can be pre-programmed so that they change in an alarm situation, when reaching a preset value, or when values vary outside a preset threshold.



COLOR CHANGE DISPLAY

Each panel instrument features a high-tech crystal-clear LCD display that provides excellent visibility in all lighting conditions and from a wide angle. All instruments have dust-and waterproof fronts that meet IP66 rating, and they conform to all general approvals.

Omron is currently the only company to feature a range of panel instruments with such color display characteristics. Products that are equipped with this function include E5CN Temperature Controllers, K3GN and K3MA Two-color Display Panel Indicators, H5CX Digital Timers and H7CX Digital Counters. These panel instruments are suitable for a wide range of applications. They can be used as alarm indicators that show a particular status of a process, in a furnace to indicate the completion of a process, or to grasp the idling state of equipment. In pump and valve applications these instruments are ideal for monitoring whether the valve is open or closed, and whether or not the pump is operational.



S8VS - compact DIN rail power supply with LED display

Omron's S8VS power supply series features a unique 3-digit, 7-segment LED display that provides data on output voltage, output current and output peak current for faster, easier diagnostics. The S8VS is ultra-compact, so it requires less panel space than competitors' models. Its DIN-rail click-on system makes installation a very easy process, and it is available in a variety of power ratings from 60W to 240W.

The S8VS series is the first power supply family in the world to have an LED display. Via this display you can check the status of voltage, current, and peak current of the unit. The display makes diagnostics and maintenance easier, and helps detect power supply and power line problems faster. The S8VS also features a built-in run-time monitor that indicates the total operation time of the power supply. This helps with preventative maintenance and thus reduces operational and maintenance costs as a whole. Mounting the S8VS is easy, thanks to its DIN-rail click-on system.



K3HB - Omron's new panel indicator

Omron has developed an innovative range of analog input panel indicators built around state-of-the-art technology to set new benchmark standards in functionality and visibility. In the development of the 1/8 DIN K3HB range, Omron has focused on making the indicators simple to read, even at a distance, and to make interpreting those readings as intuitive as possible.

The K3HB indicators provide a bar-graph position indication, which is unique in 1/8 DIN horizontal housing panel indicators. The sampling speed of this new range has been increased to 50 times per second, or 2,000 times per second for the linear sensor indicator version. Furthermore, users can specify DeviceNet communications, with the option of a DeviceNet output module delivering high-speed data communication with PLCs, without the need for special programming. The full range of K3HB analog input panel indicators includes a process indicator (K3HB-X), a temperature indicator (K3HB-H), a weighing indicator (K3HB-V) and a linear sensor indicator (K3HB-S). These indicators provide convenient, high performance solutions in a broad spectrum of applications in the process industry, as well as in machinery applications such as binding, soldering, semiconductor manufacture, moulding and mixing machines. The K3HB indicators are modular in design, which enables users to select exactly the functionality they require.

NEW PRODUCT SOLUTIONS



ZEN - the logical automatic tools for small scale flexible control

The ZEN is a modular, expandable, programmable relay that is designed to provide flexible, automatic control for small-scale machines and facilities. The ZEN combines all the functionality of timers, counters and relays to control multiple input and output signals, while being easy to install and program. It enables any daily routine that involves switching and control to be easily automated, which saves time and effort. And it is the perfect solution for building automation applications where multiple timer control is very important.

Programming the ZEN is easy, thanks to a dedicated Omron support software package. Once you have created a program you can even save it to a memory module and copy to another ZEN without having to use a PC! In addition, you can enhance the ZEN's operating capability simply by connecting more expansion I/O units. The ZEN can be used to control everything from fans and pumps to complex lighting sequences and escalators. And it is ideal for replacing dedicated printed-circuit boards, enabling you to make process changes without having to redesign a new board. A very flexible, cost-effective automation tool indeed!



S8TS - Omron's power supply with system back-up options

Omron's S8TS is an innovative DC power supply series with a unique 'building-block' concept that offers flexibility, reliability, standardization and redundancy in any industrial automation system. The S8TS is available with a DC battery back-up unit and a Buffer unit that can be easily added to the power supply to ensure system integrity at all times.

This building-block concept produces one of the most flexible power supply systems around, and should appeal to those who need to maintain production in the event of a power failure. The S8TS has three output types (5, 12 and 24VDC) that enable more than 100 different power supplies to be configured. Each 'plug-together' power unit allows you to create collectives of 2.5, 5, 7.5 or 10A in 12 or 24VDC output voltages. A 5VDC, 5A block is also available.

The standard sized, DIN-rail mounting units make initial panel layout a simple operation. As load requirements change, increasing or decreasing power output capacity takes just minutes to achieve. At just 42mm wide, these units can be added as required up to a maximum of 10A per group. Unique bus connectors enable you to connect the input voltage internally to all linked power supply units.



J7 - Minimum size, maximum performance

Omron's J7 series of high-quality contactors, thermal overload relays, and motor protection circuit breakers is designed to complement the existing portfolio. This series of feature-packed products uses state-of-the-art technology and is built by Omron on a product line that has been certified according to quality standards ISO 9001. The J7 series offers impressive power handling capabilities on compact footprints.

Most models of the contactor range can operate in temperatures from -40°C to $+90^{\circ}\text{C}$, making them ideal for use in extreme, environmentally harsh conditions. Constructed according to European and International standards, these contactors, thermal overload relays and motor protection circuit breakers conform to EN/IEC and are approved by UL/CSA, enabling them to be used in any part of the world. They are suitable for any industrial application and will appeal to panel builders, OEMs and engineers in the automotive, chemical and heavy power industries looking for the best choice in top-quality products from one supplier.

E5ZN - in-panel temperature control solutions

At just 22.5mm wide, Omron's new E5ZN temperature controller series is one of the slimmest dual-loop controllers on the market. The E5ZN features all standard temperature control functionality, and thanks to its innovative design, mounting it onto a DIN-rail is simply a matter of click-and-go!

Its innovative design and built-in Omron quality guarantees process stability and saves panel builders valuable installation time, space and wiring costs. Each slim-line unit controls two temperature loops, and as many as 16 units can be mounted side by side. This allows you to control up to 32 loops in the minimum amount of space, and at a lower cost-per-loop than anything the competition has to offer!

The E5ZN features a DeviceNet option, Retransmission outputs and current control. It has two control loops in one 22.5mm module. Modules are fast and easy to replace, without rewiring. The E5ZN also has voltage (SSR), transistor or current outputs, two alarm outputs as standard, and a heater burnout alarm or retransmission output. A new addition to the series is the linear current control unit, which is equipped as standard with (vol) transfer output.

NEW PRODUCT SOLUTIONS



Controllers and SSRs – Omron's perfect partnership

Omron is the world's largest supplier of temperature controllers. This product range is unrivaled, and includes everything from the simplest controllers to advanced communication units that help you master any control application. Omron also offers a comprehensive range of solid-state relays (SSRs) that provides the perfect load switching for temperature control applications.

These SSRs are a fast reliable and cost-effective partner to our temperature controllers. Combinations of temperature controller and SSR are available to handle almost any application, including heater bands for plastics extrusion processes, packaging machinery and heater elements in general manufacturing. Only Omron could bring you such a product choice, and all from one supplier! Designed and tested to Omron's renowned high standards, each product in this range meets all relevant international standards and provides consistently superb quality throughout its working life.



G2RS – Omron's general-purpose relays

With the G2RS relay Omron sets new standards in feature design and reliability. Since pioneering the widespread use of slim-line interface relays over a decade ago, Omron continues to be the first choice for relay users. The G2RS relay brings enhanced features and flexibility for more user-friendly installation, commissioning and operation.

Omron's G2RS relays offer unrivaled reliability, performance and product choice. Three relay types are available, in both single and double-pole changeover contact arrangements, as well as AC and DC coil voltages. All models feature a mechanical indicator, and a nameplate onto which identification data can be added. The mainstream and full-featured models have an LED indicator which lights green for DC coil voltage types and red for AC coil voltage types. The G2RS relays are robust and compact in design yet have a high switching capacity; the single-pole versions can switch an impressive 440VAC. They are built to Omron's own high quality and environmentally friendly standards, so a long, reliable working life is guaranteed. They meet all international standards, including UL, CSA, VDE, LR and CE. In addition, with the G2RS plug-in relays users have the choice of screw terminal or Screw-Less Clamp terminal sockets for maximum installation flexibility.



S8T-DCBU-02 - Power management control range with new DC buffer unit

The S8T-DCBU-02 is a buffer block that is designed to prevent interruptions in equipment operation, loss of data or other problems resulting from a momentary power loss. It does this by providing a back-up power source as well as a shutdown time off process for at least 500ms (at 2.5A) to 1s (at 1A) in the event of a glitch or transient interruptions in the power supply.

The S8T-DCBU-02 can be used with all of Omron's power supplies, and is one of the most cost-efficient ways of ensuring the supply of power in industrial automation systems. Up to four such buffer blocks can be connected in parallel to increase the back-up time and current handling capacity. The S8T-DCBU-02 operates by using built-in capacitors that act as a temporary power source during a power failure. In addition, the capacitors charge the energy that has been increasingly generated by a boosted charging voltage to them, to deliver more power and provide a longer back-up time than can be expected from a standard back-up system. When the power supply recovers, these capacitors start recharging. Like other Omron power supplies, built-in over-current and over-voltage protection circuits in the buffer block protect equipment against damage caused by shorts and overloads.

Sockets

Omron offers a wide range of sockets into which products like relays, timers and controllers can be connected. The most innovative of these is the Screw-Less Clamp (SLC) socket, which offers an effective, timesaving, no-compromise wiring solution in industrial environments. With SLC sockets wiring time is drastically reduced, routine maintenance is eliminated and a very reliable connection is assured. Because there are no screws to be tightened during initial wiring there's no over- or under-tightening of cable connections and no damaged threads. Once the clamp secures the wire, it stays secured, eliminating the risk of the wiring coming loose through shock or vibration.

Omron also provides a range of Screw Terminal Sockets, with and without external clips, which are suitable for both DIN-rail and surface mounting. In addition, Omron has a range of solder terminals, plug-in terminals, PCB terminals and wire-wrap terminals, which are suitable for back-mounting and which are also available with and without external clips.



Electromechanical relays


Omron has been supplying the industry with reliable, high-quality relays for over 40 years. These relays bring enhanced features and flexibility to the market for more user-friendly installation, commissioning and operation. They are built to Omron's own high quality and environmentally friendly standards, and guarantee a long, reliable working life.

- Excellent quality and reliability
- Slim, space-saving designs
- Push-to-test buttons – momentary and lockable
- Mechanical indicator and LED indicator
- Diode suppression
- Screw and screw-less terminal sockets with relay eject mechanism
- All relevant approvals, including UL, CSA, TÜV, VDE and CE







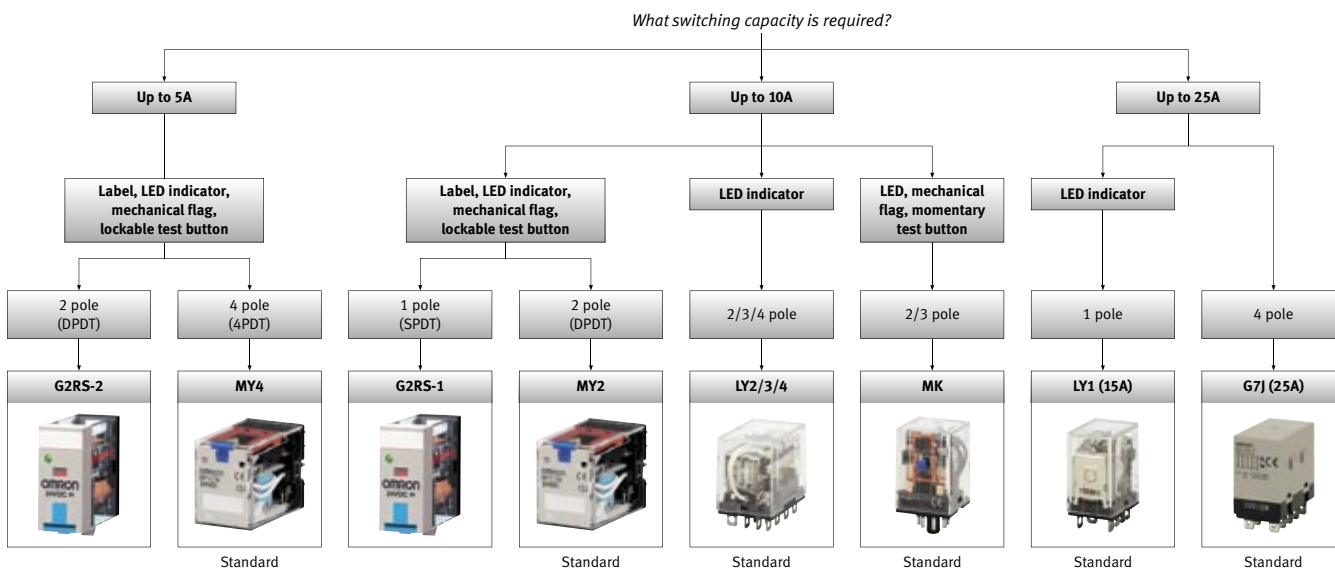

Omron's best-selling industrial relay is the MY series, which has sold in excess of 600 million pieces since its introduction.

Omron's range of industrial relays is capable of switching loads from micro-amps to 25A, and incorporate many features and contact configurations.

They cover a wide range of applications whilst meeting all the relevant International Standards for global use. They also meet and often exceed environmental standards.



Electromechanical relays

Selection criteria										Features									
Type	Label	Flag	Family		1 pole	2 pole	3 pole	4 pole	Contacts	LED indicator	Momentary test button	Lockable test button	Min load	Max current	SLC socket	Sealed type	Plug-in/solder terminals		
Control panel relay	With label	Mechanical flag	MY			●			DPDT	○	○	○	1 mA	10A	●		●		
							●		4PDT	○	○	○	1 mA	5A	●	○	●		
							●		4PDT bifurcated	○	○	○	0.1 mA	5A	●	○	●		
			G2RS		●				SPDT	○	○	○	100 mA	10A	●		●		
						●			DPDT	○	○	○	10 mA	5A	●		●		
			MK-I				●			DPDT	○				10 mA	10A			●
						●		3PDT	○			10 mA	10A			●			
	MK-S					●			DPDT	○	●			10 mA	10A			●	
							●		3PDT	○	●		10 mA	10A			●		
	Without label	No mechanical flag	LY		●					SPDT	○			100 mA	15A			○	
						●				DPDT	○			100 mA	10A			○	
						●				DPDT bifurcated	○			10 mA	7A			○	
							●			3PDT	○			100 mA	10A			○	
								●		4PDT	○			100 mA	10A			○	
			G7J		●					SPST-NC					100 mA 10 mA	8A			●
						●				DPST-NO/NC					100 mA	25A			●
						●			3PDT-NO				100 mA 10 mA	25A			●		
							●		4PST-NO				100 mA 10 mA	25A			●		
																		●	
Special purpose relay	Mechanical flag	MYK			●				DPDT				1 mA	3A			●		
	No mechanical flag	G4Q			●				DPDT				100 mA	5A			●		

					AC voltage						DC voltage					Approvals												
	PCB terminals	Quick connect terminals	Diode	Varistor	6V	12V	24V	48/50V	110/120V	220/240V	6V	12V	24V	48/50V	110/120V	CE	SP	UL US	LR	UL US	S	△	Y	D'E	D	N	S	
	●		○	○	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	●		○	○	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	●		○	○	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
			○				●		●	●	●	●	●			●	●	●	●	●	●				●			
			○				●		●	●	●	●	●			●	●	●	●	●	●				●			
			○	○	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●		●	●	●
			○	○	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●		●	●	●
			○	○	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●		●	●	●
			○	○	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●		●	●	●
	○		○	○	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●		●		
	○		○	○	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●		●		
	○		○	○	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●		●		
	○		○	○	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●		●		
	○		○	○	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●		●		
	●	●					●	●	●	●		●	●	●	●		●		●		●			●				
	●	●					●	●	●	●		●	●	●	●		●		●		●			●				
	●	●					●	●	●	●		●	●	●	●		●		●		●			●				
	●	●					●	●	●	●		●	●	●	●		●		●		●			●				
	●	●			●	●	●	●	●	●	●	●	●	●	●													
					●	●	●	●	●	●	●	●	●	●	●													

Standard
 Available
 Not available



MY



G2RS



MK-I



MK-S

MY Electromechanical relays

		Ordering code				
Model	Without LED indicator	MY	<input type="checkbox"/>	-	<input type="checkbox"/>	(S)
	With LED indicator, standard coil polarity	MY	<input type="checkbox"/>	-	<input type="checkbox"/>	(S)
	With LED indicator, reversed coil polarity	MY	<input type="checkbox"/>	1-	D2	(S)
Contact form	DPDT	<input type="checkbox"/>	2			
	4PDT	<input type="checkbox"/>	4			
	4PDT (bifurcated)	<input type="checkbox"/>	4Z			
Classification	with LED indicator	<input type="checkbox"/>	N			
	with LED indicator and test button	<input type="checkbox"/>	IN			
Built in feature	Built-in diode (DC only)	<input type="checkbox"/>	D2			
	Built-in CR (220/240 VAC, 110/120 VAC only)	<input type="checkbox"/>	CR			
Rated coil voltage	6 VAC	<input type="checkbox"/>	AC6			
	12 VAC	<input type="checkbox"/>	AC12			
	24 VAC	<input type="checkbox"/>	AC24			
	48/50 VAC	<input type="checkbox"/>	AC4850			
	110/120 VAC	<input type="checkbox"/>	AC110120			
	220/240 VAC	<input type="checkbox"/>	AC220240			
	6 VDC	<input type="checkbox"/>	DC6			
	12 VDC	<input type="checkbox"/>	DC12			
	24 VDC	<input type="checkbox"/>	DC24			
	48 VDC	<input type="checkbox"/>	DC48			
	100/110 VDC	<input type="checkbox"/>	DC100110			

G2RS Electromechanical relays

		Ordering code				
Model	G2R -	<input type="checkbox"/>	-	S	<input type="checkbox"/>	(S)
Number of poles	1 pole	<input type="checkbox"/>	1			
	2 poles	<input type="checkbox"/>	2			
Classification	General purpose (STANDARD)	<input type="checkbox"/>				
	LED indicator	<input type="checkbox"/>	N			
	Diode (DC only)	<input type="checkbox"/>	D			
	LED indicator and diode (DC only)	<input type="checkbox"/>	ND			
	LED indicator with test button	<input type="checkbox"/>	NI			
	LED indicator and diode with test button (DC only)	<input type="checkbox"/>	NDI			
Rated coil voltage	24 VAC	<input type="checkbox"/>	AC24			
	110 VAC	<input type="checkbox"/>	AC110			
	120 VAC	<input type="checkbox"/>	AC120			
	230 VAC	<input type="checkbox"/>	AC230			
	240 VAC	<input type="checkbox"/>	AC240			
	6 VDC	<input type="checkbox"/>	DC6			
	12 VDC	<input type="checkbox"/>	DC12			
	24 VDC	<input type="checkbox"/>	DC24			
	48 VDC	<input type="checkbox"/>	DC48			

MK-I/S Electromechanical relays Standard models

		Ordering code								
Industrial relays	Dust cover	MK	<input type="checkbox"/>	P	<input type="checkbox"/>	-	<input type="checkbox"/>	-	<input type="checkbox"/>	<input type="checkbox"/>
Contact form	DPDT	<input type="checkbox"/>	2							
	3PDT	<input type="checkbox"/>	3							
Internal connecting construction	Standard (STANDARD)	<input type="checkbox"/>								
	Non-standard (refer to datasheet)	<input type="checkbox"/>	2							
	Non-standard (refer to datasheet, only 3PDT)	<input type="checkbox"/>	5							
Mechanical indicator pushbutton	Mechanical indicator and pushbutton	<input type="checkbox"/>	S							
	Mechanical indicator	<input type="checkbox"/>	I							
Approved standards	UL, CSA, DEMKO, NEMKO, SEMKO, SEV, TÜV (STANDARD)	<input type="checkbox"/>								
	VDE	<input type="checkbox"/>	VD							
Rated voltage	6 VAC	<input type="checkbox"/>	AC6							
	12 VAC	<input type="checkbox"/>	AC12							
	24 VAC	<input type="checkbox"/>	AC24							
	50 VAC	<input type="checkbox"/>	AC50							
	100 VAC	<input type="checkbox"/>	AC100							
	110 VAC	<input type="checkbox"/>	AC110							
	120 VAC	<input type="checkbox"/>	AC120							
	200 VAC	<input type="checkbox"/>	AC200							
	220 VAC	<input type="checkbox"/>	AC220							
	230 VAC	<input type="checkbox"/>	AC230							
	240 VAC	<input type="checkbox"/>	AC240							
	6 VDC	<input type="checkbox"/>	DC6							
	12 VDC	<input type="checkbox"/>	DC12							
	24 VDC	<input type="checkbox"/>	DC24							
	48 VDC	<input type="checkbox"/>	DC48							
	100 VDC	<input type="checkbox"/>	DC100							
	110 VDC	<input type="checkbox"/>	DC110							

MK-I/-S Electromechanical relays Special models

Ordering code

Industrial relays Dust cover MK [] P [] - [] - [] - [] [] [] []

Contact form DPDT [2]
3PDT [3]

Classification LED indicator [N]
Diode [D]
Varistor [V]
LED indicator and diode [ND]
LED indicator and varistor [NV]

Coil polarity Standard (STANDARD) []
Reverse [1]

Internal connection construction Standard (STANDARD) []
Non-standard (refer to datasheet) [2]
Non-standard (refer to datasheet, only 3PDT) [5]

Mechanical indicator/pushbutton Mechanical indicator and pushbutton [S]
Mechanical indicator [I]

Approved standards UL, CSA only (STANDARD) []
VDE(N and D models only) [VD]

Rated voltage

6 VAC	AC6
12 VAC	AC12
24 VAC	AC24
50 VAC	AC50
100 VAC	AC100
110 VAC	AC110
120 VAC	AC120
200 VAC	AC200
220 VAC	AC220
230 VAC	AC230
240 VAC	AC240
6 VDC	DC6
12 VDC	DC12
24 VDC	DC24
48 VDC	DC48
100 VDC	DC100
110 VDC	DC110



LY Electromechanical relays

Ordering code

Model Plug-in/solder terminals LY - [] - [] [] []
 Plug-in/solder terminals with LED LY - [] N - [] [] []
 PCB terminals LY - [] - 0 [] [] []
 Upper-mounting plug-in/solder terminals LY - [] F [] [] []

Contact form SPDT [1]
 DPDT [2]
 DPDT (bifurcated) [22]
 3PDT [3]
 4PDT [4]

Built-in feature Built-in diode (DC only) [D] [D2]
 Built-in CR (DPDT AC models only) [CR] [CR]

Rated coil voltage

6 VAC	AC6
12 VAC	AC12
24 VAC	AC24
50 VAC	AC50
110/120 VAC	AC110120
200/220 VAC	AC200220
220/240 VAC	AC220240
6 VDC	DC6
12 VDC	DC12
24 VDC	DC24
48 VDC	DC48
100/110 VDC	DC100110



G7J

G7J Electromechanical relays

		Ordering code	
Industrial relays	Model with PCB terminals (single contact)	G7J -	- P
	Model with W-bracket screw terminals (single contact)	G7J -	- B
	Model with tab terminals, quick-connect terminals (#250 terminals) (single contact)	G7J -	- T
	Model of 1NO with PCB terminals (bifurcated contact)	G7J - 4A	- P - Z
	Model of 1NC with PCB terminals (bifurcated contact)	G7J - 3A1B	- P - Z
	Model with screw terminals (bifurcated contact)	G7J - 3A1B	- B - Z
	Model with tab terminals, quick-connect terminals (#250 terminals) (bifurcated contact)	G7J - 3A1B	- T - Z
		200/240 AC	
Contact form		4PST-NO	4A
		3PST-NO/SPST-NS	3A1B
		DPST-NO/DPST-NC	2A2B
Rated coil voltage		24 VAC	AC24
		50 VAC	AC50
		100 to 120 VAC	AC100/120
		200 to 240 VAC	AC200/240
		6 VDC	DC6
		12 VDC	DC12
		24 VDC	DC24
		48 VDC	DC48
		100 VDC	DC100

NOTES: For bifurcated contact type, the output is 1NO (4PST-NO) or 1NC (3PST-NO/SPST-NC).
The screw terminal and quick connect terminal relay types need a W-bracket: R99-04 (sold separately).



MYK

MYK Electromechanical relays

		Ordering code	
Model		MY2K -	
Terminals	Plug-in/ solder terminals (STANDARD)		
	PCB terminals	02	
Rated coil voltage		12 VAC	AC12
		24 VAC	AC24
		50 VAC	AC50
		100 VAC	AC100
		12 VDC	DC12
		24 VDC	DC24

G4Q Electromechanical relays

		Ordering code	
Model	Model with casing, DPDT, single contact, plug in terminal	G4Q - 212S	
	Model without casing, DPDT, single contact, solder terminal	G4Q - 211A	
Rated voltage		6 VAC	AC6
		12 VAC	AC12
		24 VAC	AC24
		50 VAC	AC50
		100/(110) VAC	AC100(110)
		200/(220) VAC	AC200(220)
		6 VDC	DC6
		12 VDC	DC12
		24 VDC	DC24
		48 VDC	DC48
		100 VDC	DC100
		200 VDC	DC200



G4Q




Timers

With over 70 years experience in timers, Omron knows exactly how to satisfy every timer function need. Our range includes electronic timers, standard and digital timers, all available in a wide variety of housing and mounting methods to suit any customer requirement.

- An extensive range of electronic timers and digital timers
- A wide range of timer function modes
- Conformance to all safety standards
- A wide range of housing varieties to suit every application
- Timer range from 0.001 seconds to 9999 hours
- Relay outputs, contact and transistor outputs

At just 17.5mm wide, the H3DS series fits into standard, modular 45mm panels and is available with screw terminals and screw-less clamp technology for faster, easier, more reliable wiring. Where space is limited, we offer the H3RN and H3YN series.

The H5CX series is a complete range of digital timers offering multiple time ranges and covering basically all timing functions, including real twin-timer function, memory function, an intuitive way of programming, and a two-color, back-lit negative transmissive LCD display.

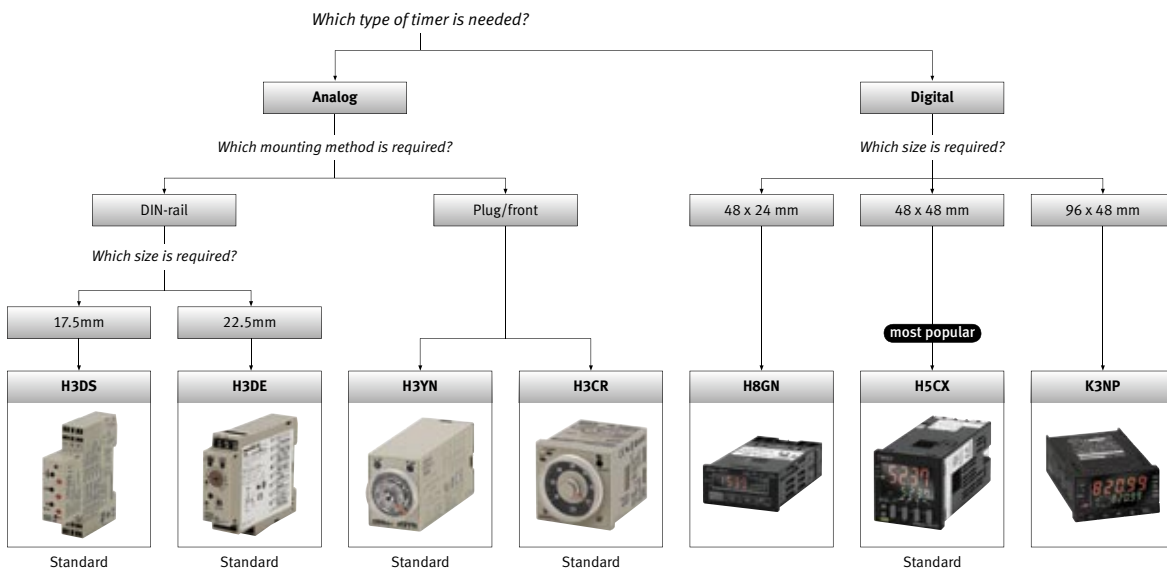

Timers

Selection criteria							Contact configuration							Inputs		Outputs														
Category	Mounting	Size	Family	Type	Model	Key points	Time limit	Instantaneous	Programmable contacts	14 pins	11 pins	8 pins	5 pins	Screw terminals	Screw-less clamp terminals	Screw-less clamp sockets	Voltage input	Transistor	Relay	SCR	Relay output type									
																					SPDT	SPST-NO	DPST-NO	DPDT	4PDT					
Analog solid state timer	DIN-rail	17.5 mm	H3DS	Multi-functional	H3DS-M	Smart lock system Screw-less clamp available	●							●	○		○	●	●											
					H3DS-S		●					●	○		○	●	●													
					H3DS-A		●					●	○		○	●	●													
				Twin timer	H3DS-F		●				●	○			●	●														
				Star-delta	H3DS-G		●				●	○			●	●										● (2x)				
				Two-wired	H3DS-X		●				●	○			●	●							●							
	22.5 mm	H3DE	Multi-functional	H3DE-M	Solid state multi-functional timer	●	●	●						●			○	●	○						○					
				H3DE-S		●	●	●					●			○	●	●								●				
			Twin timer	H3DE-F	Independent on and off settings	●					●				●	●														
			Star-delta	H3DE-G	Wide star time range (120s) and star-delta transfer time (0.5s)	●					●				●	●									● (2x)					
			Power OFF delay	H3DE-H	Covers wide range of supply voltage, two delay-time models	●					●				●	●														
	Socket/ on panel	21.5 mm	H3YN	Miniature	H3YN	Multiple time ranges and multiple operating modes, compatible with MY power relay socket	●			●	●						○	●							○	○				
							●																							
		12.8 mm	H3RN	Ultra slim	H3RN	Pin configuration compatible with G2R socket, multiple time range	●				○	○					○	●	○					○						
							●																							
		1/16 DIN	H3CR	Multi-functional	H3CR-A	Wide power supply range, 4 or 6 operating modes, PNP input models available	●	●			○	○						○	○	○						○				
					Twin timer		H3CR-F	Wide power supply range independent time settings, 14 time ranges	●					○	○							●							●	
					Star-delta		H3CR-G		Wide star-time range (120s) and star-delta transfer time (0.5s)	●	●				○	○							●						● (2x)	
Power OFF delay					H3CR-H		Long power OFF-delay times, models with forced-reset input are available			●	●				○	○							●	○					○	
HS		Multi-functional	H5CX	Programmable PV color, ergonomic up/down digit keys, twin timer in one body, PNP/NPN switchable, IP66	●					●		○	○		○						○	○					○			
	1/32 DIN				H8	Preset counter/timer		H8GN		Cyclic control possible, 4 preset values, IP66, RS-485 communication available, reset	●		●					●				●	●							
									●																					
1/8 DIN	K3	Period meter	K3NP	Many option boards: BCD, linear, comms, relays, NPN/PNP, sensor power supply, teaching, pre-scale function	●		●						●			●	○	○		○										

Features				Functions											Remarks			Approvals		
Time range		Supply voltage	Number of operating modes	ON-delay	Flicker OFF start	Flicker ON start	Signal ON/OFF-delay	Signal OFF-delay	Interval (signal or power start)	Signal ON/OFF-delay	One-shot output (ON delay)	On delay (fixed)	Independent ON/OFF time setting	Star-delta	Linear	BCD	Transistor	CE	SP	CRA US
Total time range	Number of sub ranges																			
0.1s to 120h	7	24 to 230 VAC or 24 to 48 VDC	8	●	●	●	●	●	●	●	●							●	●	●
1s to 120h	7	24 to 230 VAC or 24 to 48 VDC	4	●		●			●		●							●	●	●
2s to 120h	7	24 to 230 VAC or 24 to 48 VDC	1									●						●	●	●
0.1s to 12h	6	24 to 230 VAC or 24 to 48 VDC	2		●	●												●	●	●
1s to 120s	2	24 to 230 VAC or 24 to 48 VDC	1											●				●	●	●
0.1s to 120h	7	24 to 230 VAC or 24 to 48 VDC	1	●													●	●	●	●
0.1s to 120h	8	24 to 230 VAC or 12 VDC	8	●	●	●	●	●	●	●	●							●	●	●
0.1s to 120h	8	24 to 230 VAC/DC or 12 VDC	4	●		●			●		●							●	●	●
0.1s to 120h	8	24 to 230 VAC/DC	1		●	●												●	●	●
1 to 120s	2	24 to 230 VAC/DC	1											●				●	●	●
0.1s to 120s	2 (model dependent)	100 to 120 VAC, 200 to 230 VAC, 24 VAC/DC, 48 VAC/DC	1					●										●	●	●
0.1s to 10h (model dependent)	2	24, 100 to 120, 200 to 230 VAC, 12, 23, 48, 100 to 110, 125 VDC	4	●	●	●			●									●	●	●
0.1s to 10 min or 0.1 min to 10h (model dependent)	0	24 VAC, 12, 24 VDC	4	●	●	●			●									●	●	●
0.05s to 300h, 0.1s to 600h (model dependent)	9	100 to 240 VAC, 100 to 125 VDC, 24 to 48 VAC, 12 to 48 VDC	6 (model dependent)	○	○	○	○	○	○	○	○						○	●	●	●
0.05s to 30h or 1.2s to 300h (model dependent)	14	100 to 240 VAC, 12 VDC, 24 VAC/DC, 48 to 125 VDC			●	●												●	●	●
0.5s to 120s	4	100 to 120 VAC, 200 to 240 VAC	2											●				●	●	●
0.05s to 12s, 1.2s to 12 min	4	100 to 120 VAC, 200 to 240 VAC, 24 VAC/DC, 48 VDC, 100 to 125 VDC	1					●										●	●	●
0.001s to 9999h (configurable)		100 to 240 VAC, 24 VAC, 12 to 24 VDC	12	●	●	●	●	●	●	●	●	●	●	●				●	●	●
0.000s to 9999h (configurable)	0	24 VDC	6	●	●			●	●				●					●	●	●
0 to 999999		12 to 24 VDC, 100 to 240 VAC													○	○	○			

Standard
 Available
 Not available



H3DS-M



H3DS-A



H3DE-M



H3DE-S



H3DE-F

H3DS Timers

Ordering code	
Model	Smart lock mechanism H3DS - <input type="text"/> - L <input type="text"/>
Type	Multi-function type <input type="text"/> M
	Standard type <input type="text"/> S
	Single function type <input type="text"/> A
	Twin timers <input type="text"/> F
	Star-delta timer <input type="text"/> G
	Two-wired timer <input type="text"/> X
Mounting	Screw terminal type <input type="text"/>
	Screw-less clamp type <input type="text"/> C



H3DS-F



H3DS-G

Accessories for H3DS

Ordering code	
Lock key	Y92S - 38
End plate	PEP - M
Spacer	PEP - S



H3DS-S



H3DS-X

H3DE Timers

Ordering code	
Model	Multi-function or standard model H3DE - <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/>
	Power OFF-delay timer H3DE - H <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/>
	Other models H3DE - <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/>
Type	Multi-function type <input type="text"/> M
	Standard type <input type="text"/> S
	Twin timers <input type="text"/> F
	Star-delta timer <input type="text"/> G
Output	DPDT <input type="text"/> 2
	SPDT <input type="text"/> 1
Output	12 VDC (only for DPDT output) <input type="text"/> DC12
	24 to 230 VAC/DC <input type="text"/> ACDC24230
	100 to 120 VAC <input type="text"/> AC100120
	200 to 230 VAC <input type="text"/> AC200230
	24 VAC/VDC <input type="text"/> ACDC24
48 VAC/VDC <input type="text"/> ACDC48	
Time span code	S series: 0.1 to 12 s <input type="text"/> S
	L series: 1 to 120 s <input type="text"/> L



H3DE-G



H3DE-H

Accessories for H3DE

Ordering code	
End plate	PEP - M
Spacer	PEP - S



H3YN

H3YN Timers

Ordering code

Model: H3YN - [] - [] []

Output: DPDT [2] / 4PDT [4]

Time range: Short time range (0.1s to 10 min) [] / Long-time range (0.1 min to 10 h) [1]

Contact type: Single contact [] / Twin contacts (supply voltage only 24 VDC and 4PDT only) [Z]

Supply voltage: 24 VAC [AC24] / 100 to 120 VAC [AC100120] / 200 to 230 VAC [AC200230] / 12 VDC [DC12] / 24 VDC [DC24] / 48 VDC [DC48] / 100 to 110 VDC [DC100110] / 125 VDC [DC125]



H3RN

H3RN Timers

Ordering code

Model: H3RN - [] - [] []

Output: SPDT [1] / DPST-NO [2]

Time range: Short time range (0.1s to 10 min) [] / Long-time range (0.1 min to 10 h) [1]

Supply voltage: 24 VAC [AC24] / 12 VDC [DC12] / 24 VDC [DC24]



H3CR-A



H3CR-F

H3CR-A Timers

Ordering code

Model	Multi-function timer	H3CR - A -	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Number of pins	11-pin model	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	8-pin model	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Input type for 11-pin models	No-voltage input (NPN)	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	Voltage input (PNP)	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Output	Relay output (DPDT) (STANDARD)	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	Transistor output (NPN/PNP universal use) (supply voltage 24-48AC/12-48DC only)	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	Relay output (SPDT) with instantaneous relay output (SPDT)	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Suffix	Dual mode models (signal ON/OFF delay and one-shot)	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	Double time scale (range) models (0.1 s to 600 h)	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Supply voltage	100 to 240 VAC (50/60Hz)/100 to 125 VDC	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	24 to 48 VAC (50/60Hz) / 12 to 48 VDC (not available for H3CR-A8E model)	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	24 to 48 VDC/VAC (50/60Hz) (only for H3CR-A8E model)	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

AC100240DC100125
AC2448DC1248
ACDC2448

H3CR-F Timers

Ordering code

Model	Twin timers	H3CR - F -	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Number of pins	11-pin model	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	8-pin model	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Twin timer mode	Flicker OFF start (STANDARD)	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	Flicker ON start	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Time range	0.05 s to 30 h (STANDARD)	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	1.2 s to 300 h	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Supply voltage	100 to 240 VAC	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	24 VAC/DC	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	12 VDC	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	48 to 125 VDC	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

AC100240
ACDC24
DC12
DC48125

H3CR-G Timers

Ordering code

Model	Star-delta timer, 8-pin, long body model	H3CR - G -	8	<input type="checkbox"/>	L	<input type="checkbox"/>
Outputs	Star-delta operation contact	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	Star-delta operation and instantaneous contact	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Supply voltage	100 to 120 VAC (50/60Hz)	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	200 to 240 VAC (50/60Hz)	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

AC100120
AC200240



H3CR-G



H3CR-H

H3CR-H Timers			
Ordering code			
Model	Power OFF-delay timer, long body model	H3CR - H -	L
Number of pins	11-pin model	↑	↑
	8-pin model	8	↑
Input	Without reset input	↑	↑
	With reset input	R	↑
Supply voltage	100 to 120 VAC (50/60 Hz)	AC100120	↑
	200 to 240 VAC (50/60Hz)	AC200240	↑
	24 VAC/VDC	ACDC24	↑
	48 VDC	DC48	↑
	100 to 125 VDC	DC100125	↑
Time unit code	S series: 0.05 to 12 s	S	↑
	M series: 0.05 to 12 min	M	↑

Accessories for H3CR Series		
		Ordering code
Flush mounting adapter		Y92F - 30
		Y92F - 73
		Y92F - 74
Mounting track	50 cm (l) x 7.3 mm (t)	PPF - 50N
	1 m (l) x 7.3 mm (t)	PPF - 100N
	1 m (l) x 16 mm (t)	PPF - 100N2
End plate		PPF - M
Spacer		PPF - S
Protective cover		Y92A - 48B
Track mounting	8-pin	P2CF - 8
Front connecting socket	8-pin, finger safe type	P2CF - 8 - E
	11-pin	P2CF - 11
	11-pin, finger safe type	P2CF - 11 - E
Back connecting socket	8-pin	P3G - 8
	8-pin, finger safe type	P3G - 08 with Y92A - 48G
	11-pin	P3GA - 11
	11-pin, finger safe type	P3GA - 11 with Y92A - 48G
Time setting ring	Setting a specific time	Y92S - 27
	Limiting the setting range	Y92S - 28
Panel cover	Light grey (5Y7/1)	Y92P - 48GL
	Black (N1.5)	Y92P - 48GB
	Medium grey (5Y5/1)	Y92P - 48GM
Hold-down clip	For PL08 and PL11 sockets	Y92H - 7
	For PFO85A socket	Y92H - 8



H5CX



K3NP

H5CX Timers

Ordering code	
Model	Standard type H5CX - A <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
	Economy type H5CX - L <input checked="" type="checkbox"/> 8 <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
External connection	Screw terminals <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
	8-pin socket <input type="checkbox"/> 8 <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
	11-pin socket <input checked="" type="checkbox"/> 11 <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
Output type	Contact output <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
	Transistor output <input type="checkbox"/> S <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
Supply voltage	100 to 240 VAC 50/60 Hz <input type="checkbox"/> AC100240 <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
	12 to 24 VDC / 24 VAC 50/60 Hz <input type="checkbox"/> AC24DC1224 <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
Case color	Black (STANDARD) <input checked="" type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>

K3NP Timers

Ordering code	
Model	K3NP - <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
Input sensors	NPN inputs/voltage pulse inputs <input type="checkbox"/> NB <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
	PNP inputs <input type="checkbox"/> PB <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
Supply voltage	100 to 240 VAC <input type="checkbox"/> 1 <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
	12 to 24 VDC <input type="checkbox"/> 2 <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
Display	Basic <input type="checkbox"/> A <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
	Set value LED display <input type="checkbox"/> C <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>

K3NP output boards Timers

Ordering code																																																																						
Model	For basic display type K31 - <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>																																																																					
	For set value LED display type K31 - <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>																																																																					
Output type codes	<table border="1"> <tr><td>3 comparative relay contact outputs (H, PASS, L: SPDT)</td><td>C1</td><td>C1</td></tr> <tr><td>5 comparative relay contact outputs (HH, H, L, LL: SPSTNO;PASS: SPDT)</td><td>C2</td><td>C2</td></tr> <tr><td>5 comparative relay contact outputs (HH, H, L, LL: SPSTNC;PASS: SPDT)</td><td>C5</td><td>C5</td></tr> <tr><td>5 comparative transistor outputs (NPN open collector)</td><td>T1</td><td>T1</td></tr> <tr><td>5 comparative transistor outputs (PNP open collector)</td><td>T2</td><td>T2</td></tr> <tr><td>BCD output (NPN open collector)</td><td>B2</td><td>B2</td></tr> <tr><td>BCD output + 5 transistor outputs (NPN open collector)</td><td>B4</td><td>B4</td></tr> <tr><td>Linear output (4 to 20 mA)</td><td>L1</td><td>L1</td></tr> <tr><td>Linear output (1 to 5 VDC)</td><td>L2</td><td>L2</td></tr> <tr><td>Linear output (1 mV/10 digits)</td><td>L3</td><td>L3</td></tr> <tr><td>Linear output, 4 to 20 mA + 5 transistor outputs (NPN open collector)</td><td>L4</td><td>L4</td></tr> <tr><td>Linear output, 1 to 5 V + 5 transistor outputs (NPN open collector)</td><td>L5</td><td>L5</td></tr> <tr><td>Linear output, 1 mV/10 digits + 5 transistor outputs (NPN open collector)</td><td>L6</td><td>L6</td></tr> <tr><td>Linear output, 0 to 5 VDC</td><td>L7</td><td>L7</td></tr> <tr><td>Linear output, 0 to 10 VDC</td><td>L8</td><td>L8</td></tr> <tr><td>Linear output, 0 to 5 VDC + 5 transistor outputs (NPN open collector)</td><td>L9</td><td>L9</td></tr> <tr><td>Linear output, 0 to 10 VDC + 5 transistor outputs (NPN open collector)</td><td>L10</td><td>L10</td></tr> <tr><td>Communication RS-232C</td><td>FLK1</td><td>FLK1</td></tr> <tr><td>Communication RS-485</td><td>FLK2</td><td>FLK2</td></tr> <tr><td>Communication RS-422</td><td>FLK3</td><td>FLK3</td></tr> <tr><td>RS-232C + 5 transistor outputs (NPN open collector)</td><td>FLK4</td><td>FLK4</td></tr> <tr><td>RS-485 + 5 transistor outputs (NPN open collector)</td><td>FLK5</td><td>FLK5</td></tr> <tr><td>RS-422 + 5 transistor outputs (NPN open collector)</td><td>FLK6</td><td>FLK6</td></tr> </table>	3 comparative relay contact outputs (H, PASS, L: SPDT)	C1	C1	5 comparative relay contact outputs (HH, H, L, LL: SPSTNO;PASS: SPDT)	C2	C2	5 comparative relay contact outputs (HH, H, L, LL: SPSTNC;PASS: SPDT)	C5	C5	5 comparative transistor outputs (NPN open collector)	T1	T1	5 comparative transistor outputs (PNP open collector)	T2	T2	BCD output (NPN open collector)	B2	B2	BCD output + 5 transistor outputs (NPN open collector)	B4	B4	Linear output (4 to 20 mA)	L1	L1	Linear output (1 to 5 VDC)	L2	L2	Linear output (1 mV/10 digits)	L3	L3	Linear output, 4 to 20 mA + 5 transistor outputs (NPN open collector)	L4	L4	Linear output, 1 to 5 V + 5 transistor outputs (NPN open collector)	L5	L5	Linear output, 1 mV/10 digits + 5 transistor outputs (NPN open collector)	L6	L6	Linear output, 0 to 5 VDC	L7	L7	Linear output, 0 to 10 VDC	L8	L8	Linear output, 0 to 5 VDC + 5 transistor outputs (NPN open collector)	L9	L9	Linear output, 0 to 10 VDC + 5 transistor outputs (NPN open collector)	L10	L10	Communication RS-232C	FLK1	FLK1	Communication RS-485	FLK2	FLK2	Communication RS-422	FLK3	FLK3	RS-232C + 5 transistor outputs (NPN open collector)	FLK4	FLK4	RS-485 + 5 transistor outputs (NPN open collector)	FLK5	FLK5	RS-422 + 5 transistor outputs (NPN open collector)	FLK6	FLK6
3 comparative relay contact outputs (H, PASS, L: SPDT)	C1	C1																																																																				
5 comparative relay contact outputs (HH, H, L, LL: SPSTNO;PASS: SPDT)	C2	C2																																																																				
5 comparative relay contact outputs (HH, H, L, LL: SPSTNC;PASS: SPDT)	C5	C5																																																																				
5 comparative transistor outputs (NPN open collector)	T1	T1																																																																				
5 comparative transistor outputs (PNP open collector)	T2	T2																																																																				
BCD output (NPN open collector)	B2	B2																																																																				
BCD output + 5 transistor outputs (NPN open collector)	B4	B4																																																																				
Linear output (4 to 20 mA)	L1	L1																																																																				
Linear output (1 to 5 VDC)	L2	L2																																																																				
Linear output (1 mV/10 digits)	L3	L3																																																																				
Linear output, 4 to 20 mA + 5 transistor outputs (NPN open collector)	L4	L4																																																																				
Linear output, 1 to 5 V + 5 transistor outputs (NPN open collector)	L5	L5																																																																				
Linear output, 1 mV/10 digits + 5 transistor outputs (NPN open collector)	L6	L6																																																																				
Linear output, 0 to 5 VDC	L7	L7																																																																				
Linear output, 0 to 10 VDC	L8	L8																																																																				
Linear output, 0 to 5 VDC + 5 transistor outputs (NPN open collector)	L9	L9																																																																				
Linear output, 0 to 10 VDC + 5 transistor outputs (NPN open collector)	L10	L10																																																																				
Communication RS-232C	FLK1	FLK1																																																																				
Communication RS-485	FLK2	FLK2																																																																				
Communication RS-422	FLK3	FLK3																																																																				
RS-232C + 5 transistor outputs (NPN open collector)	FLK4	FLK4																																																																				
RS-485 + 5 transistor outputs (NPN open collector)	FLK5	FLK5																																																																				
RS-422 + 5 transistor outputs (NPN open collector)	FLK6	FLK6																																																																				



H8GN

H8GN Timers/Counters

Ordering code	
Model	24 VDC H8GN - AD - <input type="checkbox"/> <input type="checkbox"/>
Communications output type	Communications not supported (STANDARD) <input type="checkbox"/> <input type="checkbox"/>
	RS-485 <input type="checkbox"/> FLK <input type="checkbox"/>



Counters

With over three decades in the counter market, Omron can provide a solution to every measurement process requirement, including total counting, timing, preset counting and specific cam positioning applications.


- Full range of battery-powered counters for total-, timing- and speed counting
- Preset version has highly visible color-change feature
- Relay output and transistor output for preset counters
- Models available with communication capability
- Conform to all relevant safety standards
- LCD negative transmission back-lit display in most models

Our H7GP/H7HP and H7E models are available as total counter, time counter and speed counter. Our multi-functional preset counter series H7CX (1/16 DIN) offers intuitive programming and the H8GN is the first miniature format (48 x 24 mm):







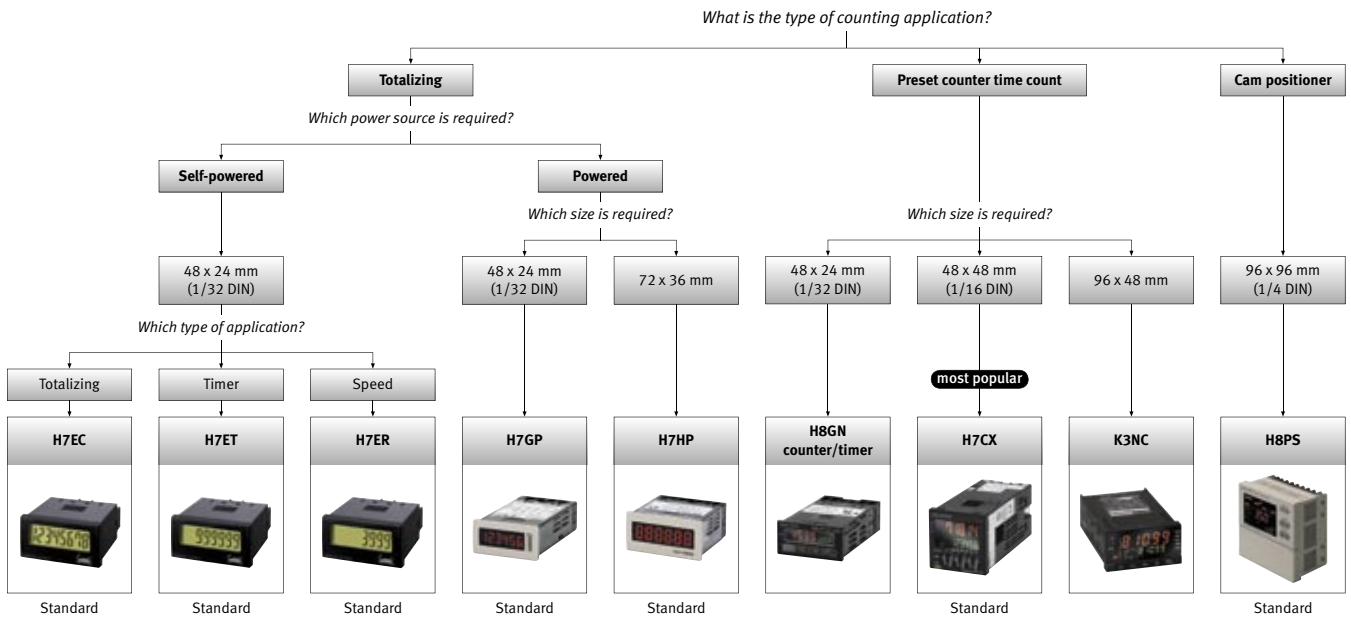



1/32 DIN), programmable preset counter/timer with an integrated RS-485 communication port.

The H8PS is our special-function counter offering positioning control in combination with a rotary encoder.

The front housing of all of these products is IP66 approved, making them suitable for the most demanding industrial applications.



Counters

Selection criteria							Outputs								Inputs		Features						
Display	Size	Counter type	Family	Model	Key points	Control outputs	2 stage	5 stage	Total	Time	Pre-set	Batch	Dual	Tachometer	Control inputs	Dual operation	Number of digits	NPN/PNP switch	Back-lit	External reset	Manual reset	Number of banks	
LCD	1/32 DIN	Self-powered total	H7E	H7EC 	Dual input speed, self-powered (LCD type without backlight)				●					●	No-voltage, PNP/NPN, DC voltage, AC/DC multi-voltage		8	●	○	●	●		
		Self-powered timer		H7ET 	Dual time range, self-powered (LCD without backlight)					●	●					No-voltage, PNP/NPN, DC voltage, AC/DC multi-voltage		7	●	○	●	●	
		Self-powered tachometer		H7ER 	Dual revolution display according to encoder resolution used, self-powered (without backlight)										●	No-voltage, PNP/NPN		4 or 5	●	○			
LCD negative transmissive	72 x 36 mm	Total counter/time counter	H7CP	H7GP 	High visibility, negative transmissive display, built-in red LED backlight at low power consumption				○	○					No-voltage or DC-voltage (switchable)		6	●		●	●		
				H7HP 	High visibility, negative transmissive display, built-in red LED backlight at low power consumption					○	○					No-voltage or DC-voltage (switchable)		7	●		●	●	
	1/32 DIN	Pre-set counter/timer	H8CN	H8GN 	Switch between counter and timer, pre-scaling, cyclic control, SV-bank, dual operation	1 relay (SPDT)	●		●	●	●	●	●		No-voltage	●	PV: 4, SV: 4			●	●	4	
	1/16 DIN	Pre-set counter	H7C	H7CX 	Multi-function, colour change on PV, dual operation	1 relay (SPDT), transistor	○		○		○	○	○	○	No-voltage, PNP/NPN	●	PV: 4, SV: 4 or PV: 6, SV: 6	●	●	●	●		
LED	1/8 DIN	Up/down counting meter	K3	K3NC 	High speed, pre-scale, sensor power supply, several output types, double display, 4 memory banks	3 or 5 relays, 5 NPN or 5 PNP, linear, BCD (5 digit)	●	●	●	●		●	●	No-voltage, voltage pulse, open collector		5		○	●	●	4		
LCD	1/4 DIN	Cam positioner	H8P	H8PS 	Accepts 330-rpm input, up to 16-cam control possible using parallel input and 2 H8PS, back-lit	NPN or PNP, cam outputs (8 lines), run out, tachometer									Encoder	○	7						
	44.8 x 22.4 mm	PCB mounting	H7E□	H7E□NCP 	Total counter or total timer, dedicated for PCB				○	○					No-voltage		7 or 8		●	●	●		

	Built-in sensor power supply	IP-grade	Terminals			Supply voltage			Comms	Functions					Color		Approvals				
			Screw terminals	PCB terminals	11-pin socket	100 to 240 VAC	12 to 24 VDC	24 VDC		Up	Down	Up/down	Reversible	Speed	Counting range	Beige	Black	CE	SP	UL	
		IP66	●					○		●					0 to 30 Hz or 0 to 1 kHz	0 to 99999999	●	●	●	●	●
		IP66	●					○		●						0.0h to 999999.9h ⇔ 0.0h to 3999d23.9h or 0s to 999h59min59s ⇔ 0.0min to 9999h59.9min	●	●	●	●	●
		IP66	●					○							1 or 10 kHz	1000 s ⁻¹ or 1000 min ⁻¹ ; 1000 s ⁻¹ or 1000 min ⁻¹ ⇔ 10000 min ⁻¹	●	●	●	●	●
		IP66G	●			○	○			●					0 to 30 Hz or 0 to 5 kHz	0.1 to 99999.9h or 1s to 99h59m59s	●	●	●	●	●
		IP66G	●			○	○			●		●			1 to 30 Hz or 0 to 5 kHz	0.1 to 99999.9h or 1s to 99h59m59s	●	●	●	●	●
		IP66	●					●	○	●	●		●		0 to 30 Hz or 0 to 5 kHz	-1999 to 9999		●	●	●	●
	●	IP66	●		○	●	●			●	●	●	●		0 to 30 Hz or 0 to 5 kHz	-999 to 9999 or -99999 to 999999		●	●	●	●
	●	IP66	●			●	●		●	●	●	●	●	No voltage contact: 0 to 30 Hz; Voltage pulse/open collector: 0 to 50 kHz	-19999 to 99999		●	●	●	●	
		IP50	●	●				●									●		●	●	●
		IP00		●				3 VDC		●					0 to 30 Hz or 0 to 1 kHz	0.0h to 999999.9h	●		●	●	●

Standard
 Available
 Not available



H7EC

H7EC Counters		Ordering code	
Model	NPN/PNP universal DC voltage input	H7EC - N	V
	Other models	H7EC - N	
Count input	No-voltage input (STANDARD)		
	NPN/PNP universal DC voltage input	V	
	AC/DC multi-voltage input	FV	
Case color	Black	B	
Display	7-segment LCD without backlight		
	7-segment LCD with backlight		H



H7ER

H7ER Counters		Ordering code	
Model	No-voltage input	H7ER - N	
	NPN/PNP universal DC voltage input	H7ER - NV	
Number of digits	4 digits (STANDARD)		
	5 digits	1	
Case color	Light grey		
	Black		B
Display	7-segment LCD without backlight		
	7-segment LCD with backlight		H

H7ET Counters		Ordering code	
Model	NPN/PNP universal DC voltage input	H7ET - N	V
	Other models	H7ET - N	
Count input	No-voltage input (STANDARD)		
	NPN/PNP universal DC voltage input	V	
	AC/DC multi-voltage input	FV	
Time range	999 999.9h / 3 999d23.9h (STANDARD)		
	999h59m59s / 9 999h59.9m	1	
Case color	Black	B	
Display	7-segment LCD without backlight		
	7-segment LCD with backlight		H



H7ET



H7GP

H7GP Counters		Ordering code	
Model		H7GP -	
Classification	Total counter	C	
	Time counter	T	
Supply voltage	100 to 240 VAC (STANDARD)		
	12 to 24 VDC		D
Case color of front section	Light grey (Munsell 5Y7/1) (STANDARD)		
	Black		B



H7HP

H7HP Counters		Ordering code	
Model	Total counter/time counter, 6 digits	H7HP - A	<input type="checkbox"/>
	Total counter, 8 digits	H7HP - C8	<input type="checkbox"/>
Supply voltage	100 to 240 VAC	<input type="checkbox"/>	↑
	12 to 24 VDC	D	
Case color of front section	Light grey (Munsell 5Y7/1)	<input type="checkbox"/>	↑
	Black	B	



H8GN

H8GN Counters/Timers		Ordering code	
Model	24 VDC	H8GN - AD -	<input type="checkbox"/>
Communications output type	Communications not supported	<input type="checkbox"/>	↑
	RS-485	FLK	



H7CX

H7CX Counters			Ordering code		
Screw terminal type	6 digits	1-stage setting, contact output	H7CX - A	<input type="checkbox"/>	
		Factory-set to 1-stage setting, contact and transistor	H7CX - AU	<input type="checkbox"/>	
	4 digits	Factory-set to 2-stage setting, contact output	H7CX - AW	<input type="checkbox"/>	
		1-stage setting, transistor output	H7CX - AS	<input type="checkbox"/>	
	11-pin socket type	6 digits	Factory-set to 1-stage setting, transistor output	H7CX - AUS	D1 <input type="checkbox"/>
			Factory-set to 2-stage setting, transistor output	H7CX - AWS	<input type="checkbox"/>
	Supply voltage/external power supply	6 digits	1-stage setting, contact output	H7CX - A4	<input type="checkbox"/>
			Factory-set to 2-stage setting, contact output	H7CX - A4W	<input type="checkbox"/>
		4 digits	1-stage setting, transistor output	H7CX - A4S	<input type="checkbox"/>
			Factory-set to 2-stage setting, transistor output	H7CX - A4WS	D <input type="checkbox"/>
12 to 24 VDC without external power supply		11-pin socket type	1-stage setting, contact output	H7CX - A11	<input type="checkbox"/>
			1-stage setting, transistor output	H7CX - A11S	<input type="checkbox"/>
DC1224AC24 (50/60Hz), 12 VDC power supply	4 digits	1-stage setting, contact output	H7CX - A114	<input type="checkbox"/>	
		1-stage setting, transistor output	H7CX - A114S	<input type="checkbox"/>	
Case color			Black	<input type="checkbox"/>	



K3NC

K3NC Counters		Ordering code	
Model	Basic display type	K3NC -	<input type="text"/>
Input sensors	NPN inputs/voltage pulse inputs	NB	↑
	PNP inputs	PB	↑
Supply voltage	100 to 240 VAC	1	↑
	12 to 24 VDC	2	↑
Display	Basic	A	↑
	Set value LED display	C	↑

K3NC output boards Counters

K3NC output boards Counters		Ordering code	
Model	For basic display type	K31 -	<input type="text"/>
	For set value LED display type	K31 -	<input type="text"/>
Output type codes	5 comparative relay contact outputs (OUT1, 2, 4, 5; SPST-NO;OUT3; SPDT)	C2	C2
	5 comparative relay contact outputs (OUT1, 2, 4, 5; SPST-NC;OUT3; SPDT)	C5	C5
	5 comparative transistor outputs (NPN open collector)	T1	T1
	5 comparative transistor outputs (PNP open collector)	T2	T2
	BCD output (NPN open collector)	B2	
	BCD output + 5 transistor outputs (NPN open collector)	B4	B4
	Linear output (4 to 20 mA)	L1	
	Linear output (1 to 5 VDC)	L2	
	Linear output (1 mV/10 digits)	L3	
	Linear output, 4 to 20 mA + 5 transistor outputs (NPN open collector)	L4	L4
	Linear output, 1 to 5 V + 5 transistor outputs (NPN open collector)	L5	L5
	Linear output, 1 mV/10 digits+ 5 transistor outputs (NPN open collector)	L6	L6
	Linear output, 0 to 5 VDC	L7	
	Linear output, 0 to 10 VDC	L8	
	Linear output, 0 to 5 VDC + 5 transistor outputs (NPN open collector)	L9	L9
	Linear output, 0 to 10 VDC + 5 transistor outputs (NPN open collector)	L10	L10
	Communication RS-232C	FLK1	
	Communication RS-485	FLK2	
	Communication RS-422	FLK3	
	RS-232C + 5 transistor outputs (NPN open collector)	FLK4	FLK4
	RS-485 + 5 transistor outputs (NPN open collector)	FLK5	FLK5
	RS-422 + 5 transistor outputs (NPN open collector)	FLK6	FLK6



H8PS

H8PS Counters		Ordering code	
Model	Front panel language: English	H8PS - 8B	<input type="text"/>
Mounting method	Flush mounting (STANDARD)	<input type="text"/>	↑
	Surface/track mounting	F	↑
Output configuration	NPN transistor output (STANDARD)	<input type="text"/>	↑
	PNP transistor output	P	↑



H7E-N_P

H7E-N_P Counters		Ordering code	
Model	Total counter	H7EC - N	<input type="text"/>
	Time counter	H7ET - N	<input type="text"/>
Max counting speed for H7EC models	1 kHz (STANDARD)	<input type="text"/>	↑
	30 Hz	L	↑



Programmable relays


The ZEN is a compact, modular, expandable programmable relay that can be installed in almost any location for a variety of simple control applications. Two versions are available, both of which are available in two CPU sizes, 10 I/O and 20 I/O, expandable up to 34 I/O and 44 I/O respectively.

- C1, with advanced functionality and display
- C2, a dedicated economy version
- Requires just simple programming skills
- Up to 44 I/O available by adding up to three expansion units
- Relay or transistor outputs, can be mixed
- Intuitive software programming and testing
- Memory cards for copying programs to another ZEN unit
- Two analog DC outputs for PNP input version

The advanced C1 version features an integrated display, programming and function buttons, calendar, clock and up to 16 display messages. The C2 economy version offers basic functionality and programming through Omron's easy-to-use software.

The ZEN's menus are available in multiple languages, as is the supporting software. Front-panel pushbuttons can be used for menu navigation and programming.

The ZEN is available as DC or AC input/power supply voltage models, and relay or transistor output. A switch-mode power supply is also available to meet all of the ZEN's application requirements.

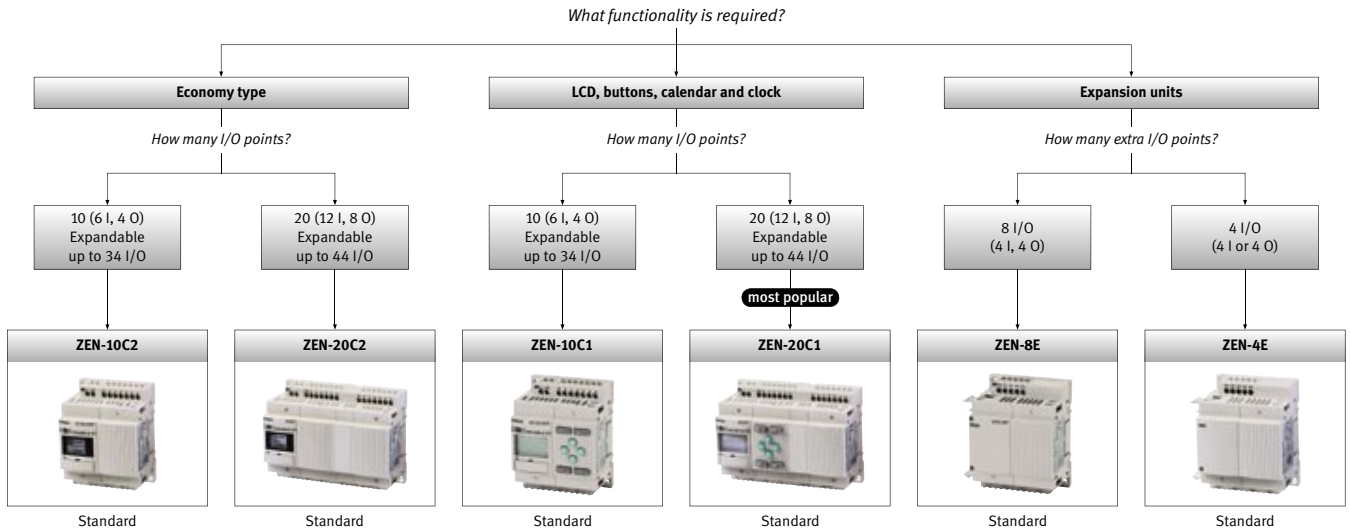

Programmable relays

Selection criteria								
Name	Number of I/O points	Inputs	Inputs / power supply	Outputs		Type	Model	Key points
CPU units	10 expandable up to 34 I/O	6	100 to 240 VAC	4	Relays	LCD	ZEN-10C1AR-A-V1	<ul style="list-style-type: none"> - Up to 3 expansion units - Screen menus in 6 languages - Ladder programming - Easy programming - Flexible expansion - Hold functions for peace of mind - Operations determined after wiring
						LED	ZEN-10C2AR-A-V1	
		6	24 VDC	4	Relays	LCD	ZEN-10C1DR-D-V1	
						LED	ZEN-10C2DR-D-V1	
		6	24 VDC	4	Transistors	LCD	ZEN-10C1DT-D-V1	
						LED	ZEN-10C2DT-D-V1	
	20 expandable up to 44 I/O	12	100 to 240 VAC	8	Relays	LCD	ZEN-20C1AR-A-V1	
						LED	ZEN-20C2AR-A-V1	
		12	24 VDC	8	Relays	LCD	ZEN-20C1DR-D-V1	
						LED	ZEN-20C2DR-D-V1	
		12	24 VDC	8	Transistors	LCD	ZEN-20C1DT-D-V1	
						LED	ZEN-20C2DT-D-V1	
Expansion I/O units	8	4	100 to 240 VAC	4	Relays	ZEN-8EAR	<ul style="list-style-type: none"> - Up to 3 expansion I/O units can be connected, regardless of the I/O specifications or unit type 	
						4		24 VDC
		4	24 VDC	4	Transistors	ZEN-8EDT		
	4	4	100 to 240 VAC			ZEN-4EA		
						4		24 VDC
				4	Relays	ZEN-4ER		
Accessories and options	EEPROM (for data security and copying)			ZEN-ME01	Enables programs and parameter settings to be saved or copied to another ZEN			
	Battery (keeps time, date and bit values for 10 years at 25°C)			ZEN-BAT01	10 year min. battery life (at 25°C)			
	Connecting cable for the programming software, RS-232C cable, 9-way 'D' connector for PC			ZEN-CIF01	2-m RS-232C (9-pin D-sub connector)			
	Support software for Windows			ZEN-SOFT01-V3	Runs on Windows 95, 98, 2000, ME, XP and NT 4.0			
	PS unit 24 VDC, 1.3A (30W)			ZEN-PA03024	ZEN Power supply unit			
	Zen kit - with LCD display AC version			ZEN-KIT01-EV3	Set containing CPU unit (ZEN-10C1AR-A-V1), support software connecting cable, ZEN support software and manual			
Zen kit - with LCD display DC version			ZEN-KIT02-EV3	Set containing CPU unit (ZEN-10C1DR-D-V1), support software connecting cable, ZEN support software and manual				

Features												Approvals								
LCD, buttons, calendar and clock	Analog input (PNP)	Timers	Holding timers	Counters	Weekly timers	Calendar timers	Displays	Work bits	Holding bits	Analog comparators (PNP)	Comparators	CE	UL							
●		16	8	16	16	16	16	16	16		16	●	●							
															●	●				
●	●											16	16	16			●	●	●	●
	●																●	●	●	●
●	●											16	16	16			●	●	●	●
	●																●	●	●	●
●										16	16	16					●	●		
																	●	●		
●	●									16	16	16					●	●		
	●																●	●		
●	●									16	16	16			4		●	●		
	●																●	●		
										4		●	●							
												●	●							
												●	●							
												●	●							
												●	●							
												●	●							
												●	●							

Standard
 Available
 Not available



ZEN-10C1



ZEN-10C2



ZEN-20C1



ZEN-20C2



ZEN-8E



ZEN-4E

ZEN Programmable relays

Ordering code

Model: ZEN - [] [] [] [] - [] V1

Number of I/O: 10 I/O (10), 20 I/O (20)

Type: With display, buttons, calendar & clock (C1), Without display, buttons, calendar & clock (C2)

Input type and power supply: AC input/100-240 VAC power supply (A), DC input/240 VDC power supply (D)

Output type: Relay (R), Transistor (T)

Expansion I/O units

Ordering code

Model: ZEN - [] E [] []

Number of I/O: 4 I / 4 O (4), 4 I / 4 O (8)

Input voltage: No input, 4O relay output model (STANDARD), 100-240 VAC (A), 24 VDC (D)

Output type: No output, 4 input model (STANDARD), Relay (R), Transistor (only for 4I/4O, DC input type ZEN-8EDT) (T)

Accessories for ZEN

Ordering code

EEPROM (for data security and copying): ZEN - ME01

Battery (keeps time, date and bit values for 10 years at 25°C): ZEN - BAT01

For the programming software, RS-232 cable, 9-way "D" connector for PC: ZEN - CIF01

Support software for WINDOWS: ZEN - SOFT01 - V3

Power supply unit 24 VDC, 1.3A (30W): ZEN - PA03024

Zen Kit - with display, AC input models: ZEN - KIT01 - EV3

Zen Kit - with display, DC input models: ZEN - KIT02 - EV3




Level and leakage controllers

Omron's liquid controllers consist of level and leakage controllers that sense the conductivity of liquids. The range includes models for long distance, high sensitivity, low sensitivity and two-wired control as well as a general-purpose version.






- Wide range of sensitivity (up to 50 MΩ) can detect pure water
- Safe, low AC voltage on sensors
- Relay and transistor outputs available
- Wide range of electrodes and sensing bands
- Controllers with AC and DC power supplies
- Conformance to all relevant safety standards
- K7L has disconnection detection capability

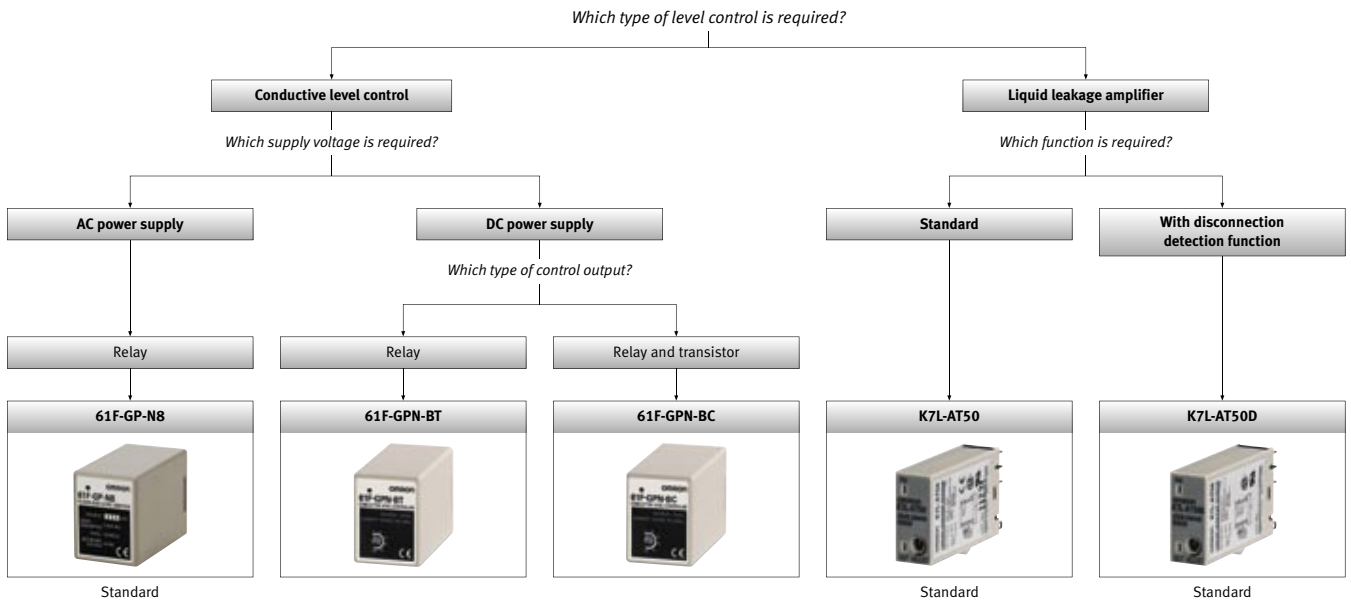The level controllers (61F) are plug-in types for 8-pin or 11-pin sockets, using safe AC voltage levels for the electrodes. Typical applications include water purification, drainage, food and beverage production lines and wastewater treatment.

The leakage controller (K7L) uses an ultra-miniature amplifier to detect a wide variety of liquids, from pure water to chemical liquids with very low conductivity. A sensing band (F03-16E) is designed specially for use with this controller.



Level and leakage controllers

Selection criteria								Supply voltage AC								
Detection method	Type	Family	Specialty	Model		Key points	Sensing range (configurable)	24V	100V	110V	120V	200V	220V	230V	240V	
Conductive	Conductive level controller	61F	Single or two-point	61F-GP-N8		<ul style="list-style-type: none"> Compact & plug-in Two-point level control Long-distance, high and low sensitivity models, two-wired models 	4 to 50 kΩ	○	○	○	○	○	○	○	○	
			AC sine wave between electrodes for stable detection with no electrolysis	61F-GPN-BT		2-point, adjustable sensitivity for use in a wide range of liquids	0 to 100 kΩ									
			AC sine wave between electrodes for stable detection with no electrolysis	61F-GPN-BC		2-point, adjustable sensitivity for use in a wide range of liquids	1 to 100 kΩ									
	Liquid leakage sensor amplifier	K7L	Sensor amplifier, AC sine wave between electrodes for stable detection with no electrolysis	K7L-AT50		Ultra miniature, to be used for a wide variety of liquids	0 to 50 MΩ									
			Sensor amplifier with disconnection detection function	K7L-AT50D		Ultra miniature, to be used for a wide variety of liquids	1 to 50 MΩ									

Supply voltage DC		Control output			Features			Approvals		
24V	12...24V	Transistor NPN	Transistor PNP	Relay	LED operation indicator	Adjustable sensitivity	Electrode types	CE	SP	UL US
				●	●		Electrode holder: PS-□S, PS-31, BF-1 and BS-1	●	●	●
●				●	●	●	Electrode holder: PS-□S, PS-31, BF-1 and BS-1	●		●
●		●		●	●	●		●		●
	○	●	●		●	●	Liquid leakage sensor band F03-16PE	●	●	●
	○	●	●		●	●		●	●	●

Standard

Available

Not available



61F-GP-N8



61F-GPN-BT



61F-GPN-BC



K7L-AT50



K7L-AT50D

61F-GP-N8 Level controllers

		Ordering code
Model	Plug in, compact 8-pin type	61F - GP - N8 <input type="checkbox"/>
		↑
Applications	General purpose type	<input type="checkbox"/>
	Long-distance type	L <input type="checkbox"/>
	High-sensitivity type (reverse acting)	H <input type="checkbox"/>
	High-sensitivity type (standard acting)	HY <input type="checkbox"/>
	Low-sensitivity type	D <input type="checkbox"/>
	Two-wired type	R <input type="checkbox"/>

61F-GPN-BT/-BC Level controllers

		Ordering code
Model	61F - GPN - B	<input type="checkbox"/>
		↑
Contacts	Open collector (NPN)	T <input type="checkbox"/>
	Relay contact (SPST-NO)	C <input type="checkbox"/>

K7L Liquid leakage sensor

		Ordering code
Model	Liquid leakage sensor amplifier	K7L - AT50 <input type="checkbox"/> - <input type="checkbox"/>
		↑
Disconnection detection function	No (STANDARD)	<input type="checkbox"/>
	Yes	D <input type="checkbox"/>
		↑
Terminator	With terminator (STANDARD)	<input type="checkbox"/>
	Without terminator	S <input type="checkbox"/>



Industrial switches


Omron designs and manufactures an extensive range of high-quality limit switches that bring easier, more effective switching solutions to machines and systems.

- More contacts for increased functionality
- Compact, space-saving design without compromising safety or performance
- Robust construction for operating in the harshest environments
- Cost-effective, high-performance switches meeting the highest safety standards
- UL/CSA, TÜV, BIA, SUVA approvals
- Designed for global use

Models are available with a variety of roller lever heads, as well as various types of plunger heads. Better seals, higher resistance to shock and stronger covers make these switches the perfect solution for any industrial application, even in extreme environmental conditions.

These general purpose limit switches are ideal for use in applications across the industry including lifts, garages, production lines, machine tools, automotive, security, domestic goods and vending machines.

Which type of switch is needed?

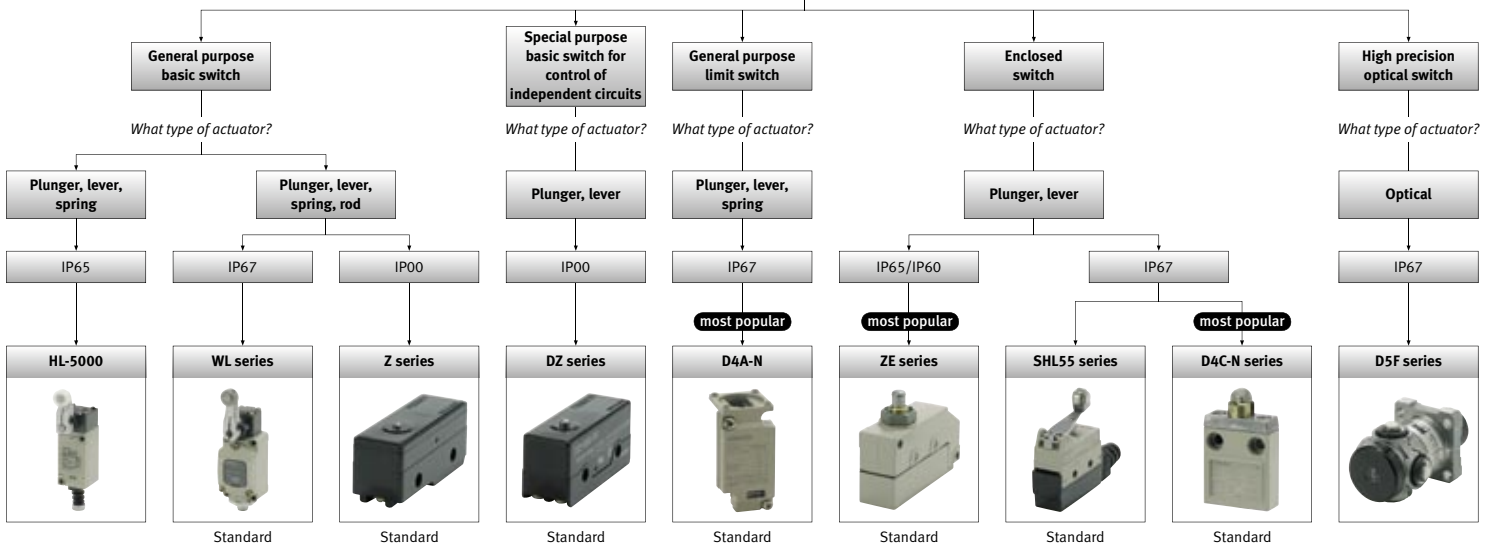

Limit switches

Selection criteria													Features			Actuators													
Category	Type	Degree of protection		Rated current (A)						Product				Weather resistant models	Microload type	Operation indicator	Adjustable rod lever	Adjustable roller lever	Bevel plunger	2,4,6 plungers	Center roller lever	Coil spring	Cone-shaped actuator	Cross roller plunger	Flexible rod	Fork lever lock	Hemispheric actuator		
		IEC	JIS	30 VDC	125/250 VDC	115 VAC	125 VAC	250 VAC	480 VAC	500 VAC	Family	Model	Key points																
General purpose switches	General purpose basic switch	IP00						20		A	A-20		Inrush currents up to 75A																
					10/3A						X	X-10		Built-in magnetic blowout															
		IP00/IP62 (drip-proof)					15	15	0,1		Z	Z-1..		High precision switching		0.1A													
		IP65	Jet-proof	5			5	5			HL	HL-5000		Miniature limit switch				•	•			•							
		IP67	Immersion-proof				10	10	10			D4A-N		Operates between -40 to +100°C	•							•	•			•			
		IP67					10	10	10	10		D4B		Snap action & slow action				•	•			•	•						
IP65	Jet-proof				10	10	10	10		D4D		Fall safe mechanism				•	•							•	•				
Special purpose switches	Small sealed switch	IP67		1			5			D4	D4E-N		Small sealed switch		0.1A														
	Miniature limit switch	IP67	Immersion-proof	1			1				D4CC		16mm thick with connector				•		•		•			•					
				4			5	5			D4C		Miniature limit switch		0.1A		•		•				•						
	Enclosed switch	IP67	Immersion-proof	6			0,5	10	10	3		D4MC		High utility enclosed switch		0.1A													
				5			0,4	10	10	2		SHL	SHL55		Sub miniature enclosed switch		0.1A												
				6			0,5	10	10			ZC	ZC-55		High precision enclosed switch														
	IP65/ IP60	Jet-/dust-proof	15			10	15	15	10		Z	ZE/ZVI/XE/XV		Large breaking power											•				
	High precision switch	IP67	Immersion-proof								D5	DSA		High precision switch for micro units		10mA				•									
	Mechanical touch switch											D5B		High sensivity touch switch		10mA									•			•	
	High-precision optical switch											D5F		Operating position in 4 ways. Cable 1 to 3m. Optical actuator: NPN/PNP open collector		0.1A													
	High temperature	IP00		1			0,4	1	1		TZ	TZ		Operation up to 400°C															
	Special purpose basic switch	IP00					0,5	10	10	2		DZ	DZ		2 independent circuits														
Multiple limit switch	IP67	Immersion-proof				0,6	10	10		VB	VB		High sealing multiple limit switch		0.1A														
Long life two circuit limit switch	IP67	Immersion-proof	6							W	WLM		Prewired version available				•												
Two circuit limit switch								10	10	10	10	WL		Microload types available		0.1A		•										•	



A-20



X-10

A-20 Industrial switches

Ordering code

Model 20A (250 VAC), 0.5mm contact gap A-20G -

Actuator

- Pin plunger (STANDARD)
- Short spring plunger D
- Panel mount plunger Q
- Panel mount cross roller plunger Q21
- Panel mount roller plunger Q22
- Hinge lever V
- Hinge roller lever V2
- Short hinge lever V21
- Short hinge roller lever V22

Terminals

- Solder terminal (STANDARD)
- Screw terminal (with toothed washer) B

X-10 Industrial switches

Ordering code

Model 10A (125 VDC), 0.5mm contact gap X-10G

Actuator

- Pin plunger (STANDARD)
- Short spring plunger D
- Slim spring plunger S
- Panel mount plunger Q
- Panel mount cross roller plunger Q21
- Panel mount roller plunger Q22
- Leaf spring L
- Hinge lever W
- Hinge roller lever W2
- Short hinge lever W21
- Short hinge roller lever W22
- Low-force hinge lever W4
- Reverse hinge lever M
- Reverse hinge roller lever M2
- Reverse short hinge roller lever M22

Terminals

- Solder terminal (STANDARD)
- Screw terminal (with toothed washer) B

Z Industrial switches

Ordering code

Model Z-

Ratings

- 0.1A (for micro load) 01
- 15A 15

Contact gap

- 0.25mm (high-sensitivity, micro load) H
- 0.5mm (standard) G
- 1.8mm (high-capacity) E

Actuator

- Pin plunger (STANDARD)
- Slim spring plunger S
- Short spring plunger D
- Spring plunger (medium OP) K
- Spring plunger (high OP) K3
- Panel mount plunger (low OP) Q3
- Panel mount plunger (medium OP) Q
- Panel mount plunger (high OP) Q8
- Panel mount roller plunger Q22
- Panel mount cross roller plunger Q21
- Leaf spring (high OF) L
- Roller leaf spring L2
- Short hinge lever W21
- Hinge lever (low OF) W
- Hinge lever (medium OF) W3
- Hinge lever (high OF) W32
- Low-force hinge lever W4
- Long hinge lever W44
- Low-force wire hinge lever (low OF) W78
- Low-force wire hinge lever (high OF) W52
- Short hinge roller lever W22
- Hinge roller lever W2
- Hinge roller lever (large roller) W25
- Short hinge cross roller lever W49
- Hinge cross roller lever W54
- Unidirectional short hinge roller lever (low OF) W2277
- Reverse hinge lever M
- Reverse short hinge roller lever M22
- Reverse hinge roller lever M2
- Flexible rod (high OF) NJ
- Flexible rod (low OF) NJ5

Degree of protection

- General purpose (STANDARD)
- Drip-proof 55
- Drip-proof (including the terminals) A55

Terminals

- Solder terminal (STANDARD)
- Screw terminal (with toothed washer) B
- Screw terminal with terminal cover (for Z-15G@A55 only) BSV

Note: For combinations of models, refer to the datasheet.



Z-15G

Z-10 split-contact models Industrial switches

Model		Ordering code	
10A, 1mm (high-capacity), split-contact models screw terminal (with toothed washer)		Z - 10F	<input type="checkbox"/> Y - B
Actuator		↑	
	Pin plunger (STANDARD)	<input type="checkbox"/>	
	Slim spring plunger	<input type="checkbox"/> S	
	Short spring plunger	<input type="checkbox"/> D	
	Panel mount plunger	<input type="checkbox"/> Q	
	Panel mount roller plunger	<input type="checkbox"/> Q22	
	Hinge lever	<input type="checkbox"/> W	
	Short hinge roller lever	<input type="checkbox"/> W22	
	Hinge roller lever	<input type="checkbox"/> W2	
	Reverse short hinge roller lever	<input type="checkbox"/> M22	

Z-15 maintained contact models Industrial switches

Model		Ordering code	
15A, 1.8mm (high-capacity), maintained contact models		Z - 15 - E	<input type="checkbox"/> R
Actuator		↑	
	Pin plunger (STANDARD)	<input type="checkbox"/>	
	Slim spring plunger	<input type="checkbox"/> S	
	Hinge lever	<input type="checkbox"/> W	



HL-5000

HL-5000 Industrial switches

Model		Ordering code	
		HL - 5 -	<input type="checkbox"/>
Actuators		↑	
	Roller lever	<input type="checkbox"/> 000	
	Adjustable roller lever	<input type="checkbox"/> 030	
	Adjustable rod lever	<input type="checkbox"/> 050	
	Sealed plunger	<input type="checkbox"/> 100	
	Sealed roller plunger	<input type="checkbox"/> 200	
	Coil spring	<input type="checkbox"/> 300	
Ground terminal specifications		↑	
	Without ground terminal (STANDARD)	<input type="checkbox"/>	
	With ground terminal/M5 tapping on the rear side	<input type="checkbox"/> G	

D4A-N Industrial switches

Ordering code		
Model	D4A -	N
Receptacle Box	(STANDARD) 1/2-14 NPT conduit (SPDT, double-break)	1
	(STANDARD) 1/2-14 NPT conduit (DPDT, double-break)	2
	G 1/2 conduit (SPDT, double-break)	3
	G 1/2 conduit (DPDT, double-break)	4
	M20 x 1.5 conduit (SPDT, double-break)	5
	M20 x 1.5 conduit (DPDT, double-break)	6
Switch Box	SPDT, double-break, without indicator	1
	SPDT, double-break, neon lamp	3
	SPDT, double-break, LED (12 VDC)	A
	SPDT, double-break, LED (24 VDC, leakage current 4mA)	C
	SPDT, double-break, LED (24 VDC, leakage current 1.3mA)	E
	SPDT, double-break, LED (48 VDC)	G
	DPDT, double-break, simultaneous operation, without indicator	5
	DPDT, double-break, sequential operation, without indicator *1	7
	DPDT, double-break, center neutral operation, without indicator *2	9
	DPDT, double-break, simultaneous operation, neon lamp	L
	DPDT, double-break, sequential operation, neon lamp *1	M
	DPDT, double-break, center neutral operation, neon lamp *2	N
	DPDT, double-break, simultaneous operation, LED	P
	DPDT, double-break, sequential operation, LED *1	Q
	DPDT, double-break, center neutral operation, LED *2	R
	Head	Roller lever, standard
Roller lever, high-sensitivity		02
Roller lever, low torque		03
Roller lever, high-sensitivity, low torque		04
Roller lever, maintained		05
Roller lever, sequential operation		17
Roller lever, center neutral operation		18
Side plunger, standard		06
Side plunger, vertical roller		07-V
Side plunger, horizontal roller		07-H
Side plunger, adjustable		08
Top plunger, standard		09
Top plunger, roller		10
Top plunger, adjustable		11
Flexible rod, spring wire		12
Flexible rod, plastic rod		14
Flexible rod, cat whisker	15	
Flexible rod, coil spring	16	

*1 Use the D4A-0017N special head.
*2 Use the D4A-0018R special head.



D4A



D4B-N

D4B Industrial switches

Ordering code		
Model	D4B -	N
Conduit	PG13.5 (1-conduit)	1
	G 1/2 (PF 1/2) (1-conduit)	2
	1/2-14NPT (1-conduit)	3
	PG13.5 (3-conduit)	5
	G 1/2 (PF 1/2) (3-conduit)	6
	1/2-14NPT (3-conduit)	7
	Built-in switch	1NC/1NO (snap-action)
2NC (slow-action)		A
1NC/1NO (slow-action, excluding D4B□□81N and D4B□□87N models)		5
Actuator	Switch box (without head)	00
	Roller lever (standard)	11
	Adjustable roller lever	16
	Adjustable rod lever	17
	Roller lever (conventional D4B-compatible)	1R
	Top plunger	70
	Top roller plunger	71
	Coil spring	81
Plastic rod	87	



D4D

D4D-N Industrial switches	
Ordering code	
Model	D4D - [] [] [] N
Conduit	PG13.5 (1-conduit) 1 G 1/2 (1-conduit) 2 1/2-14NPT (1-conduit) 3 PG13.5 (2-conduit) 5 G 1/2 (2-conduit) 6
Built-in switch	1NC/1NO (snap-action) 1 2NC (slow-action) A 1NC/1NO (slow-action) 5
Actuator	Roller lever (standard, resin lever) 20 Adjustable roller lever 21 Roller lever (metal lever) 22 Adjustable roller lever (with 50 dia. rubber roller) 27 Top plunger 31 Top roller plunger 32 One-way roller arm lever (horizontal) 62 One-way roller arm lever (vertical) 72 Cat whisker 80 Plastic rod 87 Fork lever lock (right operation) RE Fork lever lock (left operation) LE

D4D-R Industrial switches	
Ordering code	
Model	D4D - [] [] [] R
Conduit	PG13.5 (1-conduit) 1 G 1/2 (1-conduit) 2 1/2-14NPT (1-conduit) 3 PG13.5 (2-conduit) 5 G 1/2 (2-conduit) 6
Built-in switch	2NC (slow-action) A 1NC/1NO (slow-action) 5
Actuator	Roller lever 20 Adjustable roller lever 21 Adjustable roller lever (with rubber roller) 27 Plunger 31 Roller plunger 32 One-way roller arm lever (horizontal) 62 One-way roller arm lever (vertical) 72



D4E-N

D4E-N Industrial switches

Ordering code

Model D4E - N

Rated current 5A at 125 VAC (1A at 125 VAC/30 VDC for model with a connector) 1
 0.1A at 125 VAC (0.1A at 125 VAC/30 VDC for model with a connector) 2

Actuator Roller plunger A
 Crossroller plunger B
 Plunger C
 Sealed roller plunger D
 Sealed crossroller plunger E
 Sealed plunger F
 Roller lever G
 One-way action roller lever H

Terminals AC connector 00
 DC connector 10
 Screw terminals without a cable 20
 Screw terminals with a cable (right-hand) (cable is S-FLEX VCTF 3m) 21
 Screw terminals with a cable (left-hand) (cable is S-FLEX VCTF 3m) 22
 Molded terminals with a cable (right-hand) (cable is S-FLEX VCTF 3m) 23
 Molded terminals with a cable (left-hand) (cable is S-FLEX VCTF 3m) 24

Operation indicator
 Neon lamp (250 VAC) L
 LED (12 VDC) L1
 LED (24 VDC) L2
 LED (48 VDC) L3

Notes: Only the molded terminal models can be equipped with an operation indicator.
 Desired switches may not be manufactured depending on the combination between molds and indicators.
 Contact our sales representative for further information.



D4CC

D4CC Industrial switches

Ordering code

Model D4CC- 0

Rated load 1A at 125 VAC 1
 1A at 125 VAC (with LED indicator) 2
 1A at 30 VDC 3
 1A at 30 VDC (with LED indicator) 4

Actuator Pin plunger 01
 Roller plunger 02
 Crossroller plunger 03
 Bevel plunger 10
 Roller lever 24
 Sealed pin plunger 31
 Sealed roller plunger 32
 Sealed crossroller plunger 33
 Panel mount pin plunger 41
 Panel mount roller plunger 42
 Panel mount crossroller plunger 43
 Plastic rod 50
 Center roller lever 60

Note: With standard models, the operation indicator turns OFF when the switch operates. If models with operation indicators that turn ON when the switch operates are required, add "80" to the end of the model number.



D4C

D4C Industrial switches

Ordering code		
Model	D4C -	<input type="text"/>
Rated current	5A at 250 VAC, 4A at 30 VDC	<input type="text" value="1"/>
	5A at 125 VAC (with LED indicator)	<input type="text" value="2"/>
	4A at 30 VDC (with LED indicator)	<input type="text" value="3"/>
	0.1A at 125 VAC, 0.1A at 30 VDC	<input type="text" value="4"/>
	0.1A at 125 VAC (with LED indicator)	<input type="text" value="5"/>
	0.1A at 30 VDC (with LED indicator)	<input type="text" value="6"/>
Cable specifications	VCTF oil-resistant cable (3m)	<input type="text" value="2"/>
	VCTF oil-resistant cable (5m)	<input type="text" value="3"/>
	VCTF (3m)	<input type="text" value="4"/>
	VCTF (5m)	<input type="text" value="5"/>
	SJT(O) (3m)	<input type="text" value="6"/>
	SJT(O) (5m)	<input type="text" value="7"/>
	VCTF oil-resistant cable (2m)	<input type="text" value="8"/>
	VCTF (2m)	<input type="text" value="9"/>
Actuator	Pin plunger	<input type="text" value="01"/>
	Roller plunger	<input type="text" value="02"/>
	Crossroller plunger	<input type="text" value="03"/>
	Bevel plunger	<input type="text" value="10"/>
	Roller lever	<input type="text" value="20"/>
	Roller lever (high-sensitivity model)	<input type="text" value="24"/>
	Sealed pin plunger	<input type="text" value="31"/>
	Sealed roller plunger	<input type="text" value="32"/>
	Sealed crossroller	<input type="text" value="33"/>
	Panel mount pin plunger	<input type="text" value="41"/>
	Panel mount roller plunger	<input type="text" value="42"/>
	Panel mount crossroller plunger	<input type="text" value="43"/>
	Plastic rod	<input type="text" value="50"/>
	Center roller lever plunger	<input type="text" value="60"/>

Notes: Some combinations of the above may not be supported.
 With standard models, the operation indicator turns OFF when the switch operates.
 If models with operation indicators that turn ON when the switch operates are required, add "B" to the end of the model number.



D4MC

D4MC Industrial switches

Ordering code		
Model	D4MC -	<input type="text"/>
Actuator	Panel mount plunger	<input type="text" value="5000"/>
	Panel mount roller plunger	<input type="text" value="5020"/>
	Panel mount crossroller plunger	<input type="text" value="5040"/>
	Short hinge lever	<input type="text" value="1020"/>
	Hinge lever	<input type="text" value="1000"/>
	Hinge roller lever	<input type="text" value="2000"/>
	Short hinge roller lever	<input type="text" value="2020"/>
	One-way action short hinge roller lever	<input type="text" value="3030"/>



SHL55

SHL55 Industrial switches

Ordering code		
Model	SHL -	<input type="text"/>
	55 -	<input type="text"/>
Actuator	Plunger	<input type="text" value="D"/>
	Panel mount plunger	<input type="text" value="Q"/>
	Panel mount roller plunger	<input type="text" value="Q22"/>
	Panel mount crossroller plunger	<input type="text" value="Q21"/>
	Short hinge lever	<input type="text" value="W"/>
	Hinge lever	<input type="text" value="W1"/>
	Short hinge roller lever	<input type="text" value="W2"/>
	Hinge roller lever	<input type="text" value="W21"/>
	One-way action short hinge roller lever	<input type="text" value="W3"/>
	One-way action hinge roller lever	<input type="text" value="W31"/>
Rated current	Standard	<input type="text" value="0"/>
	Micro load	<input type="text" value="01"/>

Note: See catalog.



ZC-55



ZE/ZV/XE/XV



D5A

ZC-55 Industrial switches

		Ordering code
Model	ZC -	55
Actuator	Plunger	D
	Panel mount plunger	Q
	Panel mount roller plunger	Q22
	Panel mount crossroller plunger	Q21
	Sealed roller plunger	N22
	Sealed crossroller plunger	N21
	Short hinge lever	W
	Hinge lever	W1
	Short hinge roller lever	W2
	Hinge roller lever	W21
	One-way action short hinge roller lever	W3
	One-way action hinge roller lever	W31

ZE/ZV/XE/XV Industrial switches

		Ordering code
Model		- 2
Built-in switch	SPDT (AC)	Z
	SPDT (DC)	X
Mounting direction	Side mounting	E
	Base mounting	V
	Diagonal side mounting	V2
Actuator	Plunger	Q
	Roller plunger	Q22
	Crossroller plunger	Q21
	Roller arm lever	QA2
	One-way action roller arm lever	QA277
	Sealed plunger	N
	Sealed roller plunger (ZE, ZV, ZV2 only)	N22
	Sealed crossroller plunger (ZE, ZV, ZV2 only)	N21
	Sealed roller arm lever	NA2
	Sealed one-way action roller arm lever	NA277
Conduit/ground terminal	G 1/2/without ground terminal (STANDARD)	
	G 1/2/with ground terminal	G1
	Pg13.5/with ground terminal	G
	1/2-14NPSM/with ground terminal	SG1
	M20/with ground terminal	YG1
	1/2-14NPSM/without ground terminal	S
	M20/without ground terminal	Y

D5A Industrial switches

		Ordering code
Model	D5A -	
Actuator	Pin plunger, type M5, repeat accuracy 1µm max, IP40	1
	Pin plunger, type M5, repeat accuracy 3µm max, IP40	2
	Pin plunger, type M8, repeat accuracy 1µm max, IP67	3
	Pin plunger, type M16, repeat accuracy 3µm max, IP67	7
	Pin plunger, type slim, repeat accuracy 1µm max, IP67	5
	Top plunger, type limit, repeat accuracy 3µm max, IP67	8
	Bevel plunger, type limit, repeat accuracy 3µm max, IP67	9
Operating force	0.29N max	1
	0.49N max	2
	0.98N max	3
	2.45N max (M16 type only)	4
	3.92N max (limit type only)	5
Model	Contact output model (without operation indicator)	0
	Solid-state output models (with operation indicator)	1
Cable outlet	Pre-wired, 1m	0
	Pre-wired, 3m	1
	Pre-wired, 5m	2
	Connector, 1m	3
	Connector, 3m	4
	Connector, 5m	5



D5B

D5B Industrial switches		Ordering code	
Model	D5B -	<input type="text"/>	<input type="text"/>
Size	M5	<input type="text" value="5"/>	↑
	M8	<input type="text" value="8"/>	
	M10	<input type="text" value="1"/>	
Actuator	Hemispheric	<input type="text" value="01"/>	↑
	Cone-shaped	<input type="text" value="02"/>	
	Wobble stick (short spring)	<input type="text" value="51"/>	
	Wobble stick (long spring), M10 type only	<input type="text" value="53"/>	
Cable length	1m	<input type="text" value="1"/>	↑
	3m	<input type="text" value="3"/>	
	5m	<input type="text" value="5"/>	



D5F

D5F Industrial switches		Ordering code	
Model	D5F -	<input type="text"/>	<input type="text" value="0"/>
Output configuration	PNP open collector (+common), SPST-NC, indicator on when not operated	<input type="text" value="2B"/>	↑
	NPN open collector (+common), SPST-NO, indicator on when operated	<input type="text" value="3C"/>	
Cable length	1 m	<input type="text" value="1"/>	↑
	3 m	<input type="text" value="3"/>	



TZ

TZ Industrial switches		Ordering code	
Model	1A (250 VAC), 0.5mm contact gap	<input type="text" value="TZ-1G"/>	<input type="text"/>
Actuator	Pin plunger (STANDARD)	<input type="text"/>	↑
	Hinge lever	<input type="text" value="V"/>	
	Hinge roller lever	<input type="text" value="V2"/>	
	Short hinge roller lever	<input type="text" value="V22"/>	

DZ Industrial switches

Ordering code

Model 10A (250 VAC), 0.5mm contact gap, DPDT **DZ - 10G** - 1

Actuator

- Pin plunger (STANDARD)
- Hinge lever V
- Short hinge roller lever V22
- Hinge roller lever V2
- Hinge lever W
- Short hinge roller lever W22
- Hinge roller lever W2

Terminals

- Solder terminal A
- Screw terminal B



VB Industrial switches

Ordering code

Model VB -

Number of plungers

- 2 plungers 2
- 3 plungers 3
- 4 plungers 4
- 5 plungers 5
- 6 plungers 6

Actuator

- Bevel plunger 1
- Roller plunger 2

Switch box

- Flange switch box with two conduit holes on the side 1
- Flange switch box with four conduit holes 2
- Non-flange switch box with two conduit holes on the side 4
- Non-flange switch box with four conduit holes 5

Scraper

- NBR scraper 1
- FPM scraper 2

Contact

- 10A (STANDARD)
- 0.1A (micro load) A

Ground terminal

- Without ground terminal (STANDARD)
- With ground terminal E





WL

WL Industrial switches

Model	Ordering code	Standard (optional)	Micro
Electrical rating	WL -		01
Actuator and head Specifications	Switches without levers Roller lever: standard model (R 318) Roller lever: standard, standard model (R50) Roller lever: standard, standard model (R63) Roller lever: overtravel, general purpose model, 80 Roller lever: overtravel, high-sensitivity, 80 Roller lever: overtravel, 90 Roller lever: high precision Adjustable roller lever: standard Adjustable roller lever: overtravel, general purpose model, 80 Adjustable roller lever: overtravel, high-sensitivity, 80 Adjustable roller lever: overtravel, 90 Adjustable rod lever: standard Adjustable rod lever: overtravel, general purpose model, 80, 25 to 140 mm Adjustable rod lever: overtravel, high-sensitivity, 80, 25 to 140 mm Adjustable rod lever: overtravel, 90, 25 to 140 mm Rod spring lever: protective, overtravel, general purpose model, 80 Fork lever lock: protective, WL 5A100 Fork lever lock: protective, WL 5A102 Plunger: top plunger Plunger: top-roller plunger Plunger: sealed top-roller plunger Plunger: top-ball plunger Plunger: horizontal plunger Plunger: horizontal-roller plunger Plunger: horizontal-ball plunger Flexible rod: coil spring Flexible rod: coil spring, multi-wire Flexible rod: coil spring, resin rod Flexible rod: steel wire	WL5CA2 WL5CA2 WL5CA2 WL5RH2 WL5R2 WL5CA2-2N WL5BCA2 WL5CA2 WL5RH2 WL5R2 Adjust WL5CA2-2N WL5CL WL5CL HL HLA GL CL-2N HL5 CA32-41 CA32-42 CA32-43 D D2 D28 D3 SD SD2 SD3 NI NI-30 NI-2 NI-S2	
Environment-resistant model specifications	Standard (optional) Corrosion-proof Weather resistant		
Built-in switch specifications	General purpose built-in switch (standard) Hemiferrically sealed built-in switch	55	
Temperature specifications	Standard: -10°C to 60°C (standard) Heat-resistive: 5°C to 120°C Low temperature: -40°C to 40°C	TH TC	
Special hermetic model specifications	No cables or molding (standard) General purpose built-in switch with cables attached and molded conduit opening and cover (cover cannot be removed). Airtight built-in switch with cables attached and molded conduit opening, cover, and case cover (cover cannot be removed). Airtight built-in switch with cables attached and molded conduit opening, cover, and case cover (cover cannot be removed). The head opening is created to protect it from cutting powder. Airtight built-in switch with cables attached and molded conduit opening, cover, and case cover (cover cannot be removed). The head opening is created to protect it from cutting powder. Airtight built-in switch with cables attached, S.C. Connector can be used, molded conduit opening, cover, and case cover (cover cannot be removed). Airtight built-in switch with cables attached, fluorine rubber-molded conduit opening, cover, and case cover (cover cannot be removed, head direction cannot be changed).	139 140 141 145 Rp40 Rp50	
Conduit size, ground terminal specifications*	G 1/2 without ground terminal (standard) G 1/2 with ground terminal Pg.13.5 with ground terminal M20 with ground terminal 1/2" - 14NPT with ground terminal	G1 G Y TS	
Indicator type	Neon lamp: 125 VAC / 0.6mA leakage current or 250 VAC / 1.5mA leakage current LED: 10 to 115 VAC/DC / 0.5mA leakage current	LE LD	
Lamp wiring	NC connection: light ON when operating NO connection: light ON when not operating	2 3	
Lever type	Standard lever (standard) Double nut lever	A	

* 1/2" NPT with ground terminals meet EN/IEC standard (not from the CE marking).




Pushbutton switches

Omron worked closely together with many leading machine manufacturers to produce this diverse range of high quality pushbutton switches that offer practical solutions for industrial applications.

- 2-piece construction
- Snaps together for quick assembly
- 16 to 22 mm housings
- IP40 and IP65, oil-tight
- Variety of shapes: rectangular, square, round
- Illuminated and non-illuminated types

Omron's pushbutton switches include models in 16 mm or 22 mm diameter. Available in a variety of shapes, sizes, colors and functions, the range allows you to select the right product for your application.

Which application is required?

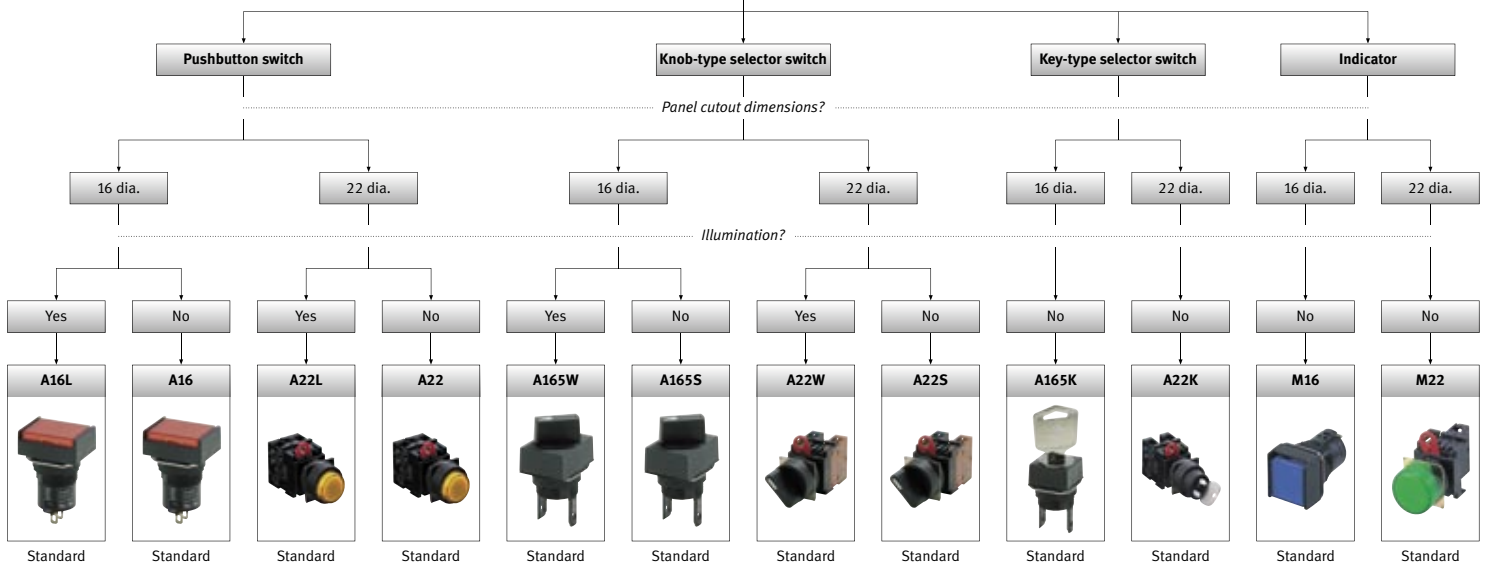

Pushbutton switches

Selection criteria							Pushbutton color																		
							Incandescent lamp-lighted						LED-lighted					Non-lighted							
Type	Mounting	Size	Model	Image	Key points	Shape	Red	Amber	Green	White	Blue	Orange	Red	Amber	Green	White	Blue	Red	Amber	Green	White	Blue	Black		
Pushbutton switch	Nut mounting	16mm	A16		Modular construction		•	•	•	•	•			•	•	•	•	•							•
		22mm	A22		Easy mounting & removing		•	•	•	•	•			•	•	•	•	•	•	•	•	•	•	•	•
Key-type selector switch		16mm	A165K		Oil-resistant																				•
		22mm	A22K		3-row mounting of switch blocks																				•
Knob-type selector switch		16mm	A165S/W		Short mounting depth									•	•	•									
		22mm	A225/W		Finger-protection mechanism		•	•	•		•			•	•	•		•							•
Indicator		16mm	M16		LED, incandescent and neon lamp		•	•	•	•	•			•	•	•	•	•							
		22mm	M22		Easy mounting & removing		•	•	•	•	•			•	•	•	•	•	•						

Features																								Switch ratings [A]			Terminals		Operating voltage			Form								Approvals		
Momentary operation	Self-holding	No of contacts	IP rating	Buzzer	Legend plate	Reset method manual	Reset method automatic	125 VAC	250 VAC	30 VDC	Solder	Screwless clamp	5 VDC	12 VDC	24 VDC	SPDT	DPDT	2 notches	3 notches	SPST-NO	SPST-NC	SPST-NO + SPST-NC	DPST-NO	DPST-NC	CE	SP	UL															
●	●	2	IP40/IP65		●	●		5	3	3	●														●	●	●															
		6	IP65		●			10	6	10			●	●	●					●	●	●	●	●	●	●	●	●														
		2	IP65		●	●	●	5	3	3	●		●	●	●	●	●	●	●						●	●	●															
●	●	6	IP65		●	●		10	6	10								●	●	●	●	●	●	●	●	●	●															
●	●	2	IP65		●			5	3	3	●		●	●	●	●	●	●	●						●	●	●															
●	●	6	IP65		●	●		10	6	10								●	●	●	●	●	●	●	●	●	●															
			IP40/IP65		●						●	●	●	●	●										●	●	●															
			IP65		●								●	●	●										●	●	●															

Standard
 Available
 Not available



A16

A16 Pushbutton switches

Ordering code

Pushbutton A16 L- - - - -

Degree of protection IP40 (STANDARD) []
IP65 [5]

Flange shape Rectangular [J]
Round [T]
Square [A]

Pushbutton color code Red [R]
Yellow [Y]
Green [G]
Blue [A]
White [W]
Black *1 [B]

Operation Momentary [M]
Alternate [A]

Illumination/voltage None (STANDARD) []
LED 5 VDC [5D]
12 VDC [12D]
24 VDC [24D]
120 VAC [TV]
Incandescent lamp 5 VAC/VDC [5]
12 VAC/VDC [12]
24 VAC/VDC [24]

Contacts SPDT [1]
DPDT [2]

*1. Models with 0 (Black) only available without illumination.

A16 Subassembled pushbutton switches

Pushbutton

Ordering code

Pushbutton A16 L- - - - -

Degree of protection IP40 (STANDARD) []
IP65 oil-resistant [5]

Flange shape Rectangular [J]
Round [T]
Square [A]

Illumination color

<i>Non-lighted models</i>	Red	[R]
	Green	[G]
	Yellow	[Y]
	White	[W]
	Blue	[A]
	Black	[B]
<i>Lighted models</i>	LED/Incandescent lamp	Red [R] Yellow [Y] White [W] Blue [A]
	LED	Green [GY]
	Incandescent lamp	Green [G]

Case

Ordering code

Case A16 - - - - -

Degree of protection IP40 (STANDARD) []
IP65 oil-resistant [5]

Flange shape Rectangular [CJ]
Round [CT]
Square [CA]

Switch action Momentary [M]
Alternate [A]

Lamp

Ordering code

Lamp A16 - - - - -

Operating voltage (rated)

<i>Incandescent lamp</i>	5 (6) VAC/VDC	[5]
	12 (14) VAC/VDC	[12]
	24 (28) VAC/VDC	[24]
<i>LED</i>	5 VDC	[5DS]
	12 VDC	[12DS]
	24 VDC	[24DS]

Illumination color

Incandescent lamp	[]
Red (LED)	[R]
Green (LED)	[G]
Yellow (LED)	[Y]
White (LED)	[W]
Blue (LED)	[A]

Switch

Ordering code

Switch (solder terminals) A16 - - - - -

Voltage reduction circuit Without (STANDARD) []
Operating/rated voltage 100 VAC/110 VAC [T1]

Contacts SPDT [1]
DPDT [2]



A16



A22

A22 Subassembled pushbutton switches

Pushbutton

Ordering code

Pushbutton Non-lighted A22 -

Lighted A22 L -

Flange shape *Non-Lighted*

Round/flat	F
Round/projection	T
Round/full-guard	G
Round/half guard	H
Square/projection	C
Square/full-guard	D
Round/mushroom (30-dia, head)	S
Round/mushroom (40-dia, head)	M

Lighted

Round/projection	T
Round/full-guard	G
Round/half guard	H
Square/projection	C
Square/full-guard	D

Illumination color

Red	R
Green	G
Yellow	Y
White	W
Blue	A
Black (for non-lighted models only)	B

Lamp

Ordering code

Lamp A22 -

Operating voltage (rated voltage)

<i>Incandescent lamp</i>	5 VAC/DC (5V)	5
	12 VAC/DC (12V)	12
	24 VAC/DC (24V)	24
	100 VAC/DC (100V)	H1
<i>LED</i>	6 VDC (6 VDC)	6D
	6 VAC (6 VAC)	6A
	12 VAC/VDC (12 VAC/VDC)	12A
	24 VAC/VDC (24 VAC/VDC)	24A

Illumination color

Incandescent lamp (STANDARD)	<input type="checkbox"/>
Red	R
Green	G
Yellow	Y
Blue	A

Switch

Ordering code

Switch A22 - - -

Lighted/non-lighted

Non-lighted (STANDARD)	<input type="checkbox"/>
Lighted	L

Contacts

SPST-NO	10
SPST-NC	01
SPST-NO+SPST-NC	11
DPST-NO	20
DPST-NC	02

Switch action

Momentary	M
Alternative	A

Voltage reduction unit (lighted type only)

Without voltage reduction unit (STANDARD)	<input type="checkbox"/>
110 VAC (95-115 VAC)	T1
220 VAC (190-230 AC)	T2



A165K

A165K Key-type selector switches - subassembled pushbutton switches

Selector		Ordering code
Selector		A165K - <input type="text"/> <input type="text"/>
Flange shape	Rectangular	J
	Round	T
	Square	A
Number of notches/reset method/key release position	2 notches/manual/left	2ML
	2 notches/manual/right	2MR
	2 notches/manual/right and left	2M
	2 notches/automatic/left	2AL
	3 notches/manual/centre	3MC
	3 notches/manual/right	3MR
	3 notches/manual/left	3ML
	3 notches/manual/right, left and centre	3M
	3 notches/automatic/centre	3AC

Switch		Ordering code
Switch, solder terminals		A165 - <input type="text"/> <input type="text"/>
Number of notches	2 notches	2N
	3 notches	3N
Contacts	SPDT	1
	DPDT	2



A22K

A22K Key-type selector switch subassembled pushbutton switches

Selector		Ordering code
Selector		A22K - <input type="text"/> <input type="text"/>
Number of notches/reset method/key release position	2 notches/manual/left	2ML
	2 notches/manual/left and right	2M
	2 notches/automatic/left	2AL
	3 notches/manual/left	3ML
	3 notches/manual/left and right	3M
	3 notches/manual/centre	3MC
	3 notches/automatic/centre	3AC

Switch		Ordering code
Switch		A22 - <input type="text"/> M
Contacts	SPST-NO (2 notch models only)	10
	SPST-NC (2 notch models only)	01
	SPST-NO+SPST-NC	11
	DPST-NO	20
	DPST-NC	02



A165S/W

A165S/W Knob-type selector switches - subassembled pushbutton switches

Selector	
Ordering code	
Selector, IP65	A165 - [] - [] - [] - []
Lighted/non-lighted	Non-lighted [S] Lighted [W]
Flange shape	Rectangular [J] Round [T] Square [A]
Number of notches	2 notches/manual [2M] 2 notches/automatic [2A] 3 notches/manual [3M] 3 notches/mixed-operation [3A] 3 notches/CCW-manual/CW-automatic [3MA] 3 notches/CCW-automatic/CW-manual [3AM]
Illumination color	Red [R] Yellow [Y] Green [G] Black*1 [B]
*1 Models with B (Black) only available without illumination.	

Switch	
Ordering code	
Switch, solder terminals, IP65	A165S - [] - N - [] - []
Number of notches	[2] [3]
Contacts	SPDT [1] DPDT [2]
Lighted/non-lighted	Non-lighted [] Lighted [L]

Lamp	
Ordering code	
Lamp	A165S - [] - []
Operating voltage (rated voltage)	5 VDC [5DS] 12 VDC [12DS] 24 VDC [24DS]
Illumination color	Red (LED) [R] Green (LED) [G] Yellow (LED) [Y]



A225/W

A225/W Subassembled knob-type selector switches - pushbutton switches

Pushbutton		Ordering code	
Pushbutton	Non-lighted	A225 -	<input type="text"/>
	Lighted	A22W -	<input type="text"/>
Number of notches/reset method	2 notches/manual	2M	↑
	2 notches/automatic	2A	
	3 notches/manual	3M	
	3 notches/automatic	3A	
Illumination color	Black (for non-lighted models only) (STANDARD)	<input type="text"/>	↑
	Red	R	
	Green	G	
	Yellow	Y	
	Blue	A	

Lamp		Ordering code	
Lamp		A22 -	<input type="text"/>
Operating voltage (rated voltage)	<i>Incandescent lamp</i>	5 VAC/DC (5V)	5
		12 VAC/DC (12V)	12
		24 VAC/DC (24V)	24
		100 VAC/DC (100V)	H1
	<i>LED</i>	6 VDC (6 VDC)	6D
		6 VAC (6 VAC)	6A
		12 VAC/VDC (12 VAC/VDC)	12A
		24 VAC/VDC (24 VAC/VDC)	24A
Illumination color	Incandescent lamp (STANDARD)	<input type="text"/>	↑
	Red	R	
	Green	G	
	Yellow	Y	
	Blue	A	

Switch		Ordering code	
Switch		A22 -	<input type="text"/>
Lighted/non-lighted	Non-lighted (STANDARD)	<input type="text"/>	↑
	Lighted	L	
Contacts	SPST-NO (2 notch models only)	10	↑
	SPST-NC (2 notch models only)	01	
	SPST-NO+SPST-NC	11	
	DPST-NO	20	
	DPST-NC	02	
Voltage reduction unit (lighted type only)	Without voltage reduction unit (STANDARD)	<input type="text"/>	↑
	110 VAC (95-115 VAC)	T1	
	220 VAC (190-230 VAC)	T2	



M16

M16 Indicators - subassembled pushbutton switches

Display		Ordering code	
Display	For LED-lighted models Incandescent lamps	A16	L- [] [] []
Degree of protection	IP40 (STANDARD) IP65 oil-resistant	[]	[]
Flange shape	Rectangular Square Round	[J] [A] [T]	[]
Illumination color	Red Yellow Pure Yellow Green White Blue	[R] [R] [Y] [Y] [PY] [PY] [G] [GY] [W] [W] [A] [A]	[]

Case		Ordering code	
Case		A16	- C [] M
Degree of protection	IP40 (STANDARD) IP65 oil-resistant	[]	[5]
Flange shape	Rectangular Square Round	[J] [A] [T]	[]

Socket		Ordering code	
Socket		M16	- []
Terminals	Solder terminals Solder terminals, voltage reduction lighting, 100V Screw-less clamp, voltage reduction lighting, 200V	[0] [T1] [T2-S]	[]

Lamp		Ordering code	
Lamp	LED Incandescent lamps	A16 - [] []	[]
Operating voltage	5 VDC 12 VDC 24 VDC 5 VAC/VDC 12 VAC/VDC 24 VAC/VDC	[5D] [12D] [24D]	[5] [12] [24]
Illumination color	Red Yellow Green White Blue	[SR] [SY] [SG] [SW] [A]	[]



M22

M22 Indicators - subassembled pushbutton switches

Display

Ordering code

Display: M22 -

Flange shape: Round/flat (F) or Square/projection (C)

Cap color: Red (R), Green (G), Yellow (Y), White (W), Blue (A)

Lamp

Ordering code

Lamp: LED A22 -

Operating voltage (rated voltage)	Incandescent lamp	5 VAC/DC (5V)	5
		12 VAC/DC (12V)	12
		24 VAC/DC (24V)	24
		100 VAC/DC (100V)	H1
LED		6 VDC (6 VDC)	6D
		6 VAC (6 VAC)	6A
		12 VAC/VDC (12 VAC/VDC)	12A
		24 VAC/VDC (24 VAC/VDC)	24A


Illumination color: Incandescent lamp (Red: R, Green: G, Yellow: Y, Blue: A)

Socket

Ordering code

Socket: M22 - 00 -

Voltage reduction unit: Without voltage reduction unit (STANDARD), 110 VAC (T1), 220 VAC (T2)





Low voltage switch gear


Omron is an established global manufacturer of low voltage switch gear (LVSG) products, and the company's new series (J7) complements the existing portfolio.

- High power-handling on very compact footprints
- State-of-the-art technology
- Designed and built to quality standards ISO 9001
- Contactor range, up to 55kW, can operate in temperatures from -40°C to $+90^{\circ}\text{C}$
- Conformance to EN/IEC
- UL/CSA approval


This series has been designed using state-of-the-art technology and includes high-quality contactors, thermal overload relays and motor protection circuit breakers.







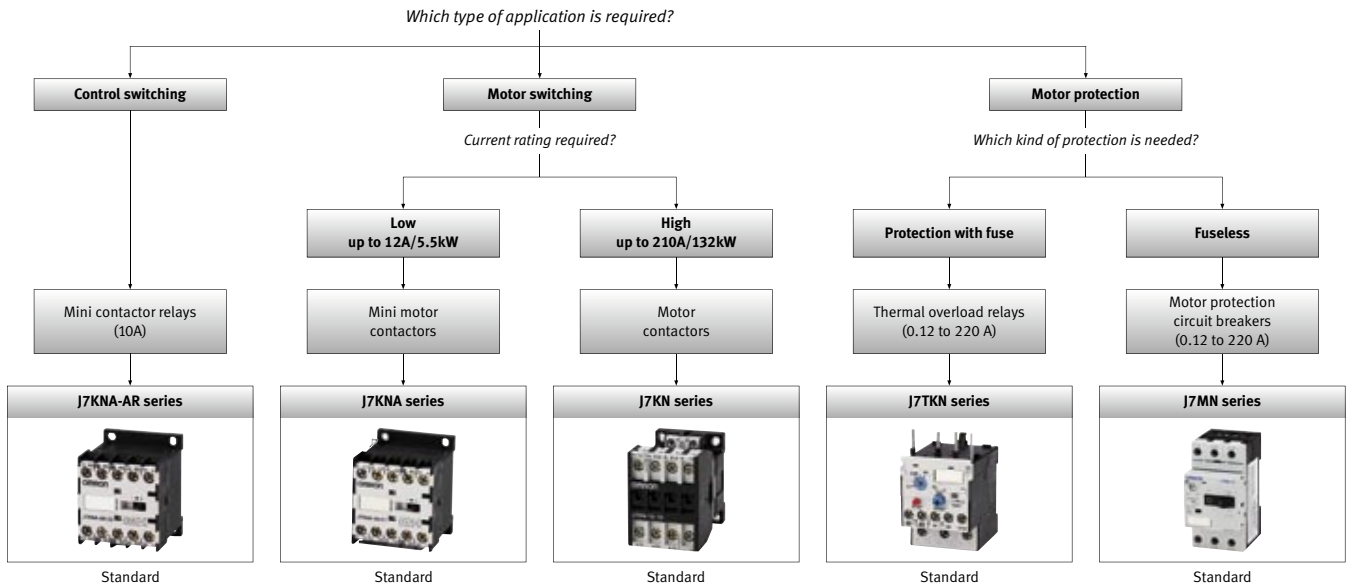



The contactors, up to 110kW, offer impressive power-handling capabilities on a small footprint. They conform to EN/IEC and are approved by UL/CSA.

Suitable for any industrial application, they will appeal to panel builders, OEMs and engineers looking for top-quality products from one supplier.



Low voltage switch gear


Selection criteria								Thermal overload relay	Auxiliary contacts	
Category	Mounting	Distinction number according to EN 50011	AC15 230V [A]	AC15 400V [A]	Thermal rated current I _n [A]	Model	Key points		Integrated auxiliary contacts	Additional auxiliary contacts block
Mini contactor relay	35mm DIN-rail or base	40E	3	2	10	J7KNA-AR-40		AC & DC operated Positively guided contacts For rel. devices DIN 19240	4 NO	J73KNA-11 (1 NO + 1 NC) J73KN-A-02 (2 NC) J73KN-A-40 (4 NO) J73KN-A-22 (2 NO + 2 NC)
		31E	3	2	10	J7KNA-AR-31			3 NO + 1 NC	
		22E	3	2	10	J7KNA-AR-22			2 NO + 2 NC	

Selection criteria							Thermal overload relay	Auxiliary contacts						
Category	Mounting	AC1 up to 690V [A]	Motor AC3 up to 400V [kW]	Motor AC3 380-415V [kW]	Motor AC3 660-690V [kW]	Model		Key points	Integrated auxiliary contacts	Additional auxiliary contacts block				
Mini motor contactor	35mm DIN-rail or base	20	4	4	4	J7KNA-09		AC & DC operated Integrated auxiliary contacts		J73KN-AM-11 (1 NO + 1 NC) J73KN-AM-02 (2 NC) J73KN-AM-22 (2 NO + 2 NC)				
			5.5	5.5	5.5	J7KNA-12				1 NO/1 NC				
Motor contactors	35mm DIN-rail or base	25	4	5.5	5.5	J7KN-10		AC & DC operated Integrated auxiliary contacts Screw fixing Snap fitting up to 45 kW Front mounted single Pole auxiliary contacts (1 NC or 1 NO) Side mounted Auxiliary contacts (1 NC/1 NO) Mechanical interlock Suppressors Pneumatic timer modules Linking modules MPCB – contactor		1 NO/1 NC				
			5.5	7.5	7.5	J7KN-14				1 NO/1 NC				
		32	7.5	10	10	J7KN-18				1 NO/1 NC				
			11	10	10	J7KN-22				1 NO/1 NC				
	Base	35mm DIN-rail or base	50	11	15	15	J7KN-24				J73KN-B-10 (1 NO) J73KN-B-01 (1 NC) J73KN-C-115 (1 NO + 1 NC)			
				65	15	18.5	18.5					J7KN-32		
			80		18.5	18.5	18.5					J7KN-40		
				110	22	30	30					J7KN-50		
			120		30	37	37					J7KN-62		
				130	37	45	45					J7KN-74		
150	45	55	55		J7KN-85									
	Base	Base	170	55	55	55	J7KN-110				2 NO + 2 NC			
200				75	75	75	J7KN-150				2 NO + 2 NC			
				250	90	90	90				J7KN-175	1 NO/1 NC		
350	110	110	110		J7KN-200				2 NO + 2 NC					

AC power consumption of coils		DC power consumption of coils		Cable cross-section			Auxiliary contact		Features					Approvals		
Inrush [VA]	Sealed [VA]	Inrush [W]	Sealed [W]	Solid or stranded [mm ²]	Flexible [mm ²]	Cables per clamp [mm ²]	I _n	AC15 at 230V	Rated insulation voltage U _i	AC operated	DC operated	4 pole version	Short circuit protection	CE	SP	cUL US
25	4 – 5	2.5	2.5	0.75 – 2.5	0.75 – 2.5	2	10A	3A	690 VAC	●	●	○	20A	●	●	●
25	4 – 5	2.5	2.5	0.75 – 2.5	0.75 – 2.5	2	10A	3A	690 VAC	●	●	○	20A	●	●	●
25	4 – 5	2.5	2.5	0.75 – 2.5	0.75 – 2.5	2	10A	3A	690 VAC	●	●	○	20A	●	●	●

AC power consumption of coils		DC power consumption of coils		Cable cross-section			Auxiliary contact		Features					Approvals						
Inrush [VA]	Sealed [VA]	Inrush [VA]	Sealed [VA]	Solid or stranded [mm ²]	Flexible [mm ²]	Cables per clamp [mm ²]	I _n	AC15 at 230V	Maximum power (AC:380/415V)	AC operated	DC operated	4 pole version	Short circuit protection	CE	SP	cUL US				
25	4 – 5	2.5	2.5	0.75 – 2.5	0.75 – 2.5	2	10A	3A	690 VAC	●	●	●	20A	●	●	●				
										●	●					●	●	●		
										●	●				25A	●	●	●		
33 – 45	7 – 10	75	2	0.75 – 6	1 – 4	2	16A	12A		●	●					●	●	●		
										●	●					●	●	●		
										●	●				●	●	●			
90 – 115	9 – 13	140	2	1.5 – 25	2.5 – 16	1	16A	12A		●	●				●	●	●			
										●	●				●	●	●			
										●	●				●	●	●			
										●	●				●	●	●			
140 – 165	13 – 18	200	6	4 – 50	10 – 35	1	16A	12A		●	●				●	●	●			
										●	●				●	●	●			
										●	●				●	●	●			
280 – 350	16 – 23	170	2	10 – 70	6 – 50	1	16A	12A		●	●			25A	●	●	●			
350 – 420	23 – 29	320	4		16 – 50						●	●							●	●
550	120			95	Screw	1	10A	3A	●				10A	●	●	●				
				120					●									●	●	●
1100	66			185					●									●	●	●

Standard
 Available
 Not available

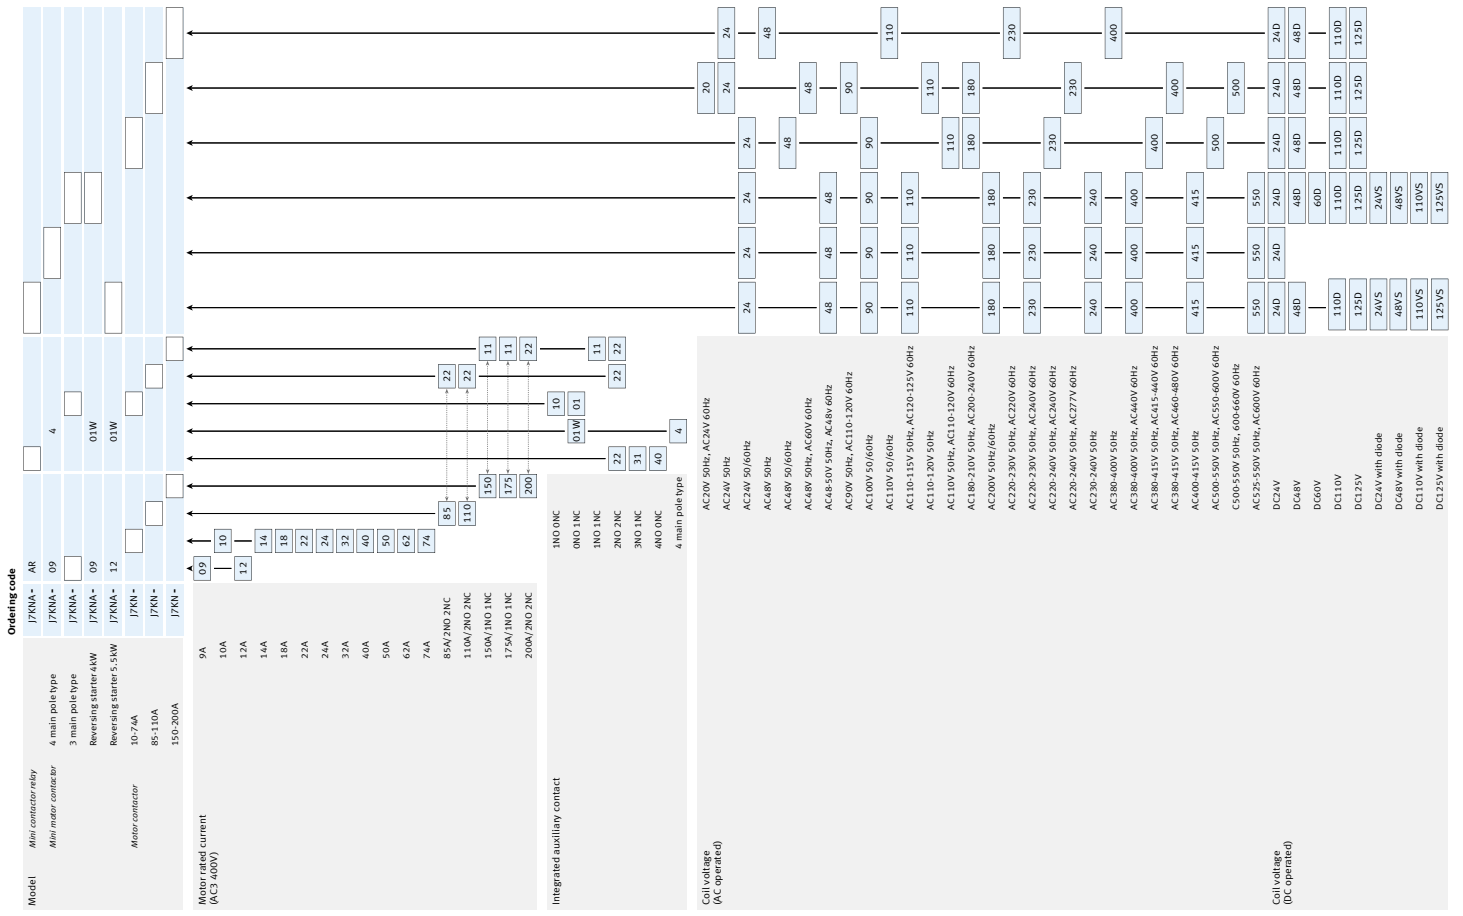



J7KNA-AR



J7TKNA-09



J7TKN-10



J7TKN-B

Accessories for auxiliary contact models													
Ordering code													
Model	For mini contactor relays, front mounting												
	For mini contactors, front mounting												
	For mini contactor reversing starter left hand side, front mounting												
	For mini contactor reversing starter right hand side, front mounting												
	For motor contactors 4-37kW, front mounting												
	For motor contactors 11-37kW, side mounting												
	J73KN - A -												
	J73KN - AM -												
	J73KN - AM - 11V												
	J73KN - AM - 11X												
	J73KN - B -												
	J73KN - C - 11 S												
Combination of NO/NC contacts	<table border="0"> <tr> <td>0NO 1NC</td> <td>01</td> </tr> <tr> <td>1NO 0NC</td> <td>10</td> </tr> <tr> <td>1NO 1NC</td> <td>11 11</td> </tr> <tr> <td>0NO 2NC</td> <td>02 02</td> </tr> <tr> <td>2NO 2NC</td> <td>22 22</td> </tr> <tr> <td>4NO 0NC</td> <td>40</td> </tr> </table>	0NO 1NC	01	1NO 0NC	10	1NO 1NC	11 11	0NO 2NC	02 02	2NO 2NC	22 22	4NO 0NC	40
0NO 1NC	01												
1NO 0NC	10												
1NO 1NC	11 11												
0NO 2NC	02 02												
2NO 2NC	22 22												
4NO 0NC	40												





Accessories for motor contactors: varistor units	
Ordering code	
Varistor units	J74KN - - VG
For which model	For motor contactor (4-11kW) to snap on to coil terminals
	For motor contactor (4-37kW) to snap on to contactor
	A
	B
Voltage	110-230 VAC/DC 230
	250-415 VAC/DC 400

Accessories for motor contactors: RC suppressor units	
Ordering code	
Model	A-type for mini motor contactor and motor contactor (4-18.5kW)
	B-type for mini motor contactor and motor contactor (4-55kW)
	C-type for motor contactors 4-37kW
	J74KN - A - RC 230
	J74KN - B
	J74KN - C - RC
Voltage	24-48 VAC/DC 48
	110-230 VAC/DC 230
	250-415 VAC/DC 400
	12-48 VAC (50/60 Hz)/DC 24
	48-127 VAC (50/60 Hz)/DC 110
	110-250 VAC (50/60 Hz)/DC 230

Accessories for motor contactors: pneumatic timers	
Ordering code	
Model	For motor contactor 4-11kW
	J74KN - B - TP
Time	40 seconds 40
	180 seconds 180
Delay	ON-delayed DA
	OFF-delayed IA

Accessories for motor contactors: mechanical interlock	
Ordering code	
Model	J74KN - - ML
For which model	Motor contactor 4-18.5kW
	Motor contactor 22-37kW
	Motor contactor 45-55kW
	B
	C
	D

Low voltage switch gear – Motor protection circuit breakers (MPCB)

Selection criteria											
Category	Type	Current range	Family		Rated current [A]	Suitable for motors 3-400V [kW]	Current thermal overload release [A]	Setting range instantaneous short-circuit release [A]	Short-circuit breaking capacity at 3-400V [kA]	Model	
Motor protection circuit breaker	Switch type	0.11 - 12A	J7MN-12		0.16		0.11 – 0.16	2.1	100	J7MN-12-E16	
					0.2		0.14 – 0.2	2.6		J7MN-12-E2	
					0.25	0.06	0.18 – 0.25	3.3		J7MN-12-E25	
					0.32	0.09	0.22 – 0.32	4.2		J7MN-12-E32	
					0.4		0.28 – 0.4	5.2		J7MN-12-E4	
					0.5	0.12	0.35 – 0.5	6.5		J7MN-12-E5	
					0.63	0.18	0.45 – 0.63	8.2		J7MN-12-E63	
					0.8		0.55 – 0.8	10		J7MN-12-E8	
					1	0.25	0.7 – 1	13		J7MN-12-1	
					1.25	0.37	0.9 – 1.25	6		J7MN-12-1E25	
					1.6	0.55	1.1 – 1.6	21		J7MN-12-1E6	
					2	0.75	1.4 – 2	26		J7MN-12-2	
					2.5		1.8 – 2.5	33		J7MN-12-2E5	
					3.2	1.1	2.2 – 3.2	42		J7MN-12-3E2	
					4	1.5	2.8 – 4	52		J7MN-12-4	
					5		3.5 – 5	65		J7MN-12-5	
					6.3	2.2	4.5 – 6.3	82		J7MN-12-6E3	
					8	3	5.5 – 8	104		J7MN-12-8	
					10	4	7 – 10	130		J7MN-12-10	
					12	5.5	9 – 12	156		J7MN-12-12	
					0.16		0.11 – 0.16	2.1		100	J7MN-25-E16
					0.2		0.14 – 0.2	2.6			J7MN-25-E2
					0.25	0.06	0.18 – 0.25	3.3			J7MN-25-E25
					0.32	0.09	0.22 – 0.32	4.2			J7MN-25-E32
	0.4		0.28 – 0.4	5.2	J7MN-25-E4						
	0.5	0.12	0.35 – 0.5	6.5	J7MN-25-E5						
	0.63	0.18	0.45 – 0.63	8.2	J7MN-25-E63						
	0.8		0.55 – 0.8	10	J7MN-25-E8						
	1	0.25	0.7 – 1	13	J7MN-25-1						
	1.25	0.37	0.9 – 1.25	6	J7MN-25-1E25						
	1.6	0.55	1.1 – 1.6	21	J7MN-25-1E6						
	2	0.75	1.4 – 2	26	J7MN-25-2						
	2.5		1.8 – 2.5	33	J7MN-25-2E5						
	3.2	1.1	2.2 – 3.2	42	J7MN-25-3E2						
	4	1.5	2.8 – 4	52	J7MN-25-4						
	5		3.5 – 5	65	J7MN-25-5						
	6.3	2.2	4.5 – 6.3	82	J7MN-25-6E3						
	8	3	5.5 – 8	104	J7MN-25-8						
	10	4	7 – 10	130	J7MN-25-10						
	12.5	5.5	9 – 12.5	163	J7MN-25-12E5						
	16	7.5	11 – 16	208	J7MN-25-16						
	20		14 – 20	260	J7MN-25-20						
	22		17 – 22	286	J7MN-25-22						
	25	11	20 – 25	325	J7MN-25-25						
	25	11	18 – 25	325	J7MN-50-25						
	32	15	22 – 32	416	J7MN-50-32						
	40	18.5	28 – 40	520	J7MN-50-40						
	45	18.5	36 – 45	585	J7MN-50-45						
50	22	40 – 50	650	J7MN-50-50							
63	30	45 – 63	819	J7MN-100-63							
75	37	57 – 75	975	J7MN-100-75							
90	37	70 – 90	1170	J7MN-100-90							
100	45	80 – 100	1235	J7MN-100-100							
Rotary type	0.16 - 25A	J7MN-25		0.16		0.11 – 0.16	2.1	100	J7MN-25-E16		
				0.2		0.14 – 0.2	2.6		J7MN-25-E2		
				0.25	0.06	0.18 – 0.25	3.3		J7MN-25-E25		
				0.32	0.09	0.22 – 0.32	4.2		J7MN-25-E32		
				0.4		0.28 – 0.4	5.2		J7MN-25-E4		
				0.5	0.12	0.35 – 0.5	6.5		J7MN-25-E5		
				0.63	0.18	0.45 – 0.63	8.2		J7MN-25-E63		
				0.8		0.55 – 0.8	10		J7MN-25-E8		
				1	0.25	0.7 – 1	13		J7MN-25-1		
				1.25	0.37	0.9 – 1.25	6		J7MN-25-1E25		
				1.6	0.55	1.1 – 1.6	21		J7MN-25-1E6		
				2	0.75	1.4 – 2	26		J7MN-25-2		
				2.5		1.8 – 2.5	33		J7MN-25-2E5		
				3.2	1.1	2.2 – 3.2	42		J7MN-25-3E2		
				4	1.5	2.8 – 4	52		J7MN-25-4		
				5		3.5 – 5	65		J7MN-25-5		
				6.3	2.2	4.5 – 6.3	82		J7MN-25-6E3		
				8	3	5.5 – 8	104		J7MN-25-8		
				10	4	7 – 10	130		J7MN-25-10		
				12.5	5.5	9 – 12.5	163		J7MN-25-12E5		
				16	7.5	11 – 16	208		J7MN-25-16		
				20		14 – 20	260		J7MN-25-20		
				22		17 – 22	286		J7MN-25-22		
				25	11	20 – 25	325		J7MN-25-25		
25	11	18 – 25	325	J7MN-50-25							
32	15	22 – 32	416	J7MN-50-32							
40	18.5	28 – 40	520	J7MN-50-40							
45	18.5	36 – 45	585	J7MN-50-45							
50	22	40 – 50	650	J7MN-50-50							
63	30	45 – 63	819	J7MN-100-63							
75	37	57 – 75	975	J7MN-100-75							
90	37	70 – 90	1170	J7MN-100-90							
100	45	80 – 100	1235	J7MN-100-100							
32 - 50A	J7MN-50		25	11	20 – 25	325	J7MN-25-25				
			25	11	18 – 25	325	J7MN-50-25				
			32	15	22 – 32	416	J7MN-50-32				
			40	18.5	28 – 40	520	J7MN-50-40				
			45	18.5	36 – 45	585	J7MN-50-45				
			50	22	40 – 50	650	J7MN-50-50				
45 - 100A	J7MN-100		63	30	45 – 63	819	J7MN-100-63				
			75	37	57 – 75	975	J7MN-100-75				
			90	37	70 – 90	1170	J7MN-100-90				
			100	45	80 – 100	1235	J7MN-100-100				

Accessories																Approvals		
Transverse auxiliary contact block	Auxiliary contact block for left hand side mounting	Signalling switch for left hand side mounting	Undervoltage release	Shunt release	Moulded plastic enclosures (IP55)	Moulded plastic front plates (IP55)	Holder for frontplate	Door coupling rotary mechanisms (black and red/yellow)	Emergency-stop door-coupling rotary mechanisms (red/yellow)	Three-phase busbar system up to 5 MPCB	Line side terminal	Shroud	Adapter for mechanical fixing of MPCB and contactor	Link module	Terminal block	CE	SE	UL ^{US}
J73MN-11F	J73MN-11S	J73MN-T-11S	J74MN-U-N1	J74MN-S-N2	J74MN-PF12	J74MN-P12	J74MN-PH	J74MN-DC-B	J74MN-DC-RY	J74MN-L3-1/2 J74MN-L3-1/3 J74MN-L3-1/4 J74MN-L3-1/5	J74MN-TC12	J74MN-DS	J74MN-HU	J74KN-VD-12	J74MN-TB25	●	●	●
					J74MN-PF25	J74MN-P25					J74MN-TC25			J74KN-VD-25		●	●	●

Standard
 Available
 Not available

J7MN - Motor protection circuit breakers		
Model	Switch type (0.11-12A)	J7MN - 12 - <input type="checkbox"/>
	Rotary type (0.16-25A)	J7MN - 25 - <input type="checkbox"/>
	Rotary type (32-40A)	J7MN - 50 - <input type="checkbox"/>
	Rotary type (45-100A)	J7MN - 100 - <input type="checkbox"/>
Setting range	0.11 - 0.16	E16 E16
	0.14 - 0.2	E2 E2
	0.18 - 0.25	E25 E25
	0.22 - 0.32	E32 E32
	0.28 - 0.4	E4 E4
	0.35 - 0.5	E5 E5
	0.45 - 0.63	E63 E63
	0.55 - 0.8	E8 E8
	0.7 - 1	1 1
	0.9 - 1.25	1E25 1E25
	1.1 - 1.6	1E6 1E6
	1.4 - 2	2 2
	1.8 - 2.5	2E5 2E5
	2.2 - 3.2	3E2 3E2
	2.8 - 4	4 4
	3.5 - 5	5 5
	4.5 - 6.3	6E3 6E3
	5.5 - 8	8 8
	7 - 10	10 10
	9 - 12	12 12
	9 - 12.5	12E5 12E5
	11 - 16	16 16
	14 - 20	20 20
	17 - 22	22 22
	20 - 25	25 25
	18 - 25	25 25
	22 - 32	32 32
	28 - 40	40 40
	36 - 45	45 45
	40 - 50	50 50
	45 - 63	63 63
	57 - 75	75 75
	70 - 90	90 90
	80 - 100	100 100



J7MN-12



J7MN-25



J7MN-50



J7MN-100

Accessories for auxiliary contacts for MPCB		
Model	1NO 1NC	J73MN - 11 <input type="checkbox"/>
Mounting	Side mounting	S <input type="checkbox"/>
	Front mounting	F <input type="checkbox"/>

Accessories for line side terminals		
Model	J74MN - TC -	<input type="checkbox"/>
Type	Switch type	12 <input type="checkbox"/>
	Rotary type	25 <input type="checkbox"/>

Accessories for door coupling rotary mechanism		
Model	J74MN - DC	<input type="checkbox"/>
Colour	Black/grey	B <input type="checkbox"/>
	Red/yellow	RY <input type="checkbox"/>

Accessories for release		
Model	Shunt release, 210-230V 50/60Hz	J74MN - S - N2 <input type="checkbox"/>
	Under voltage release, 230V 50Hz / 240V 60Hz	J74MN - U - N1 <input type="checkbox"/>

Accessories for auxiliary contacts for MPCB		
Model	Trip indicating contact, 1NO 1NC, side mounting	J73MN - T11S <input type="checkbox"/>

Accessories for motor contactors: link modules MPCB - motor contactors		
Link modules MPCB - motor contactor	Link module type	J74MN - VD <input type="checkbox"/>
	DIN-Rail adapter type	J74MN - HU <input type="checkbox"/>
For which model	Motor contactor 4 - 7.5 kW	12 <input type="checkbox"/>
	Motor contactor 11 - 15 kW	25 <input type="checkbox"/>

Accessories for busbar systems		
Model	3-phase busbar system (45mm modular spacing)	J74MN - L3 - <input type="checkbox"/>
	Shroud for unused terminal	J74MN - DS <input type="checkbox"/>
Selection	For 2 circuit breakers	1/2 <input type="checkbox"/>
	For 3 circuit breakers	1/3 <input type="checkbox"/>
	For 4 circuit breakers	1/4 <input type="checkbox"/>
	For 5 circuit breakers	1/5 <input type="checkbox"/>

Accessories for mounting		
Model	Molded plastic enclosure/front plate	J74MN - <input type="checkbox"/>
	Holder for front plate	J74MN - PH <input type="checkbox"/>
Type	Enclosure IP55	PF <input type="checkbox"/>
	Module plastic front plate	P <input type="checkbox"/>
	Holder for front plate	PH <input type="checkbox"/>
MPCB Type	Switch type	12 <input type="checkbox"/>
	Rotary type	25 <input type="checkbox"/>



Temperature controllers


Omron is the largest supplier of temperature controllers in the world, and has products ranging from the simplest controllers to advanced units with communication options that help you master any control application.

- Heating or heating/cooling control
- Variety of selectable input ranges
- Auto-tuning and self-tuning options for optimum control
- Parameter linked crystal-clear color change displays
- Conformance to all relevant standards (including CE, UL, IEC & CSA)

The E5N and E5K series meet all standard control requirements, from simple on/off control up to complex high-speed process applications.

Where space is limited the slim E5ZN (just 22.5mm wide) is the ideal choice. In-panel E5ZN models can be plugged together to control a system of up to 32 loops.

The new E5CN features a unique PID-control algorithm that ensures very stable temperature control, and an 11-segment LCD, 3-color change display provides clear read-outs at all times.

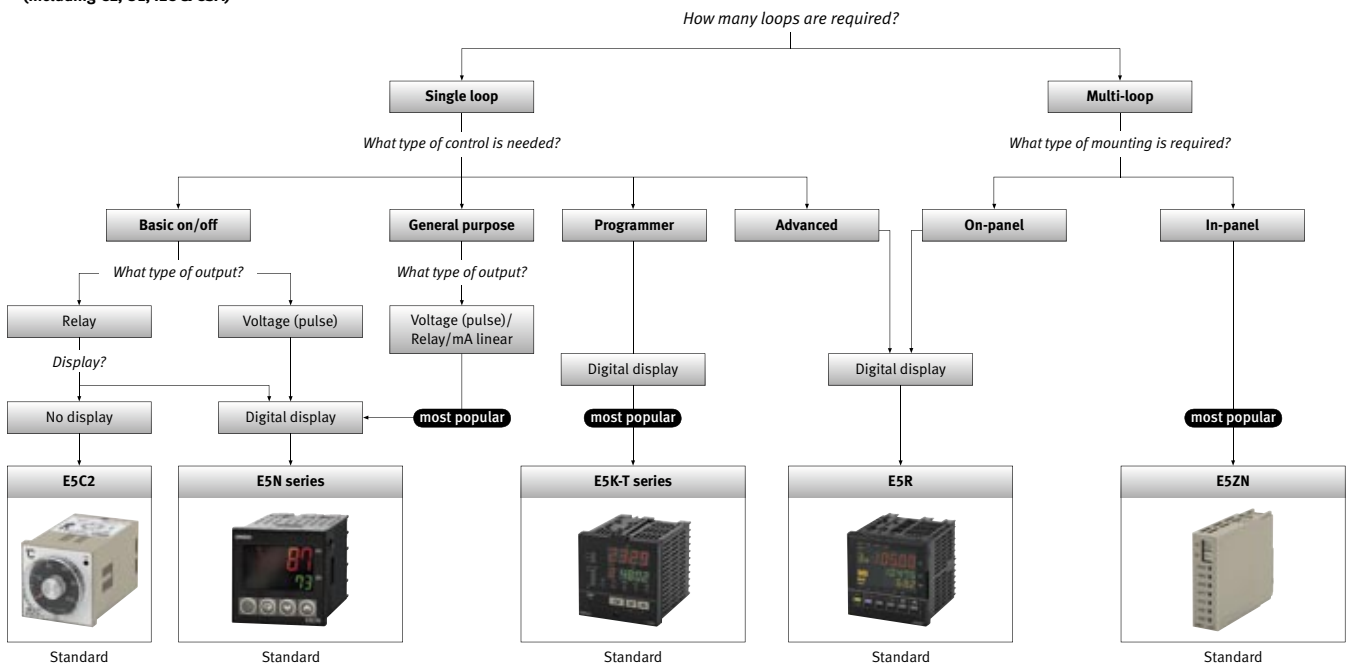

Temperature controllers

Selection criteria									Control mode					Features										
Panel	Loops	Category	Type	Family	Size	Model		Key points	ON/OFF	PID	2-PID *4	Operation *6	Position proportional *1	Accuracy	Auto-tuning	Self-tuning	Transfer output	Remote input	Number of alarms	Heater burnout	IP rating front panel			
On-panel type	Single loop	Analogue TC	Basic	E5C2	1/16 DIN	E5C2		- Compact - Cost-effective - In- & on-panel	●	● *3		H									IP40			
				E5CS-X	1/16 DIN	E5CS-X		- Easy to read - Deviation indicator - Dip switch set-up	●	●		H/C		0.5% FS		●				1		IP50		
		Digital temperature controller	General purpose	E5_N	1/4 DIN	E5AN		- Compact & intelligent - Various temperature inputs - Heating or heating/cooling - Comms optional	●		●	H&C		±0.5%	●	●					3	○	IP66	
					1/8 DIN	E5EN			●		●	H&C		±0.5%	●	●					3	○	IP66	
					1/16 DIN	E5CN			●		●	H&C		±0.5%	●	●	○				2/3	○ *7	IP66	
					1/32 DIN	E5GN			●		●	H&C		±0.5%	●	●						1	○	IP66
		Digital process controller	Universal	E5_K	1/4 DIN	E5AK		- Modular structure - High accuracy - Advanced tuning	●		●	H&C	●	±0.3%	●	●	○	○			3	○	IP66	
					1/8 DIN	E5EK			●		●	H&C	●	±0.3%	●	●	○	○			3	○	IP66	
					1/16 DIN	E5CK			●		●	H&C		±0.3%	●	●	○				3	Loop burnout	IP66	
			Universal/ programmer	E5_KT	1/4 DIN	E5AKT			●		●	H&C	●	±0.3%	●	●	○					3	○	IP66
					1/8 DIN	E5EKT			●		●	H&C	●	±0.3%	●	●	○					3	○	IP66
					1/16 DIN	E5CKT			●		●	H&C		±0.3%	●	●	○					3	Loop burnout	IP66
		Advanced	E5_R	1/4 DIN	E5AR		- High speed and high accuracy applications - Multi-loop, cascade and proportional control	●		●	H&C	●	±0.1%	●	●	●	●				4		IP66	
				1/8 DIN	E5ER			●		●	H&C	●	±0.1%	●	●	●	●				4		IP66	
In-panel type		Digital temperature controller	Modular	E5ZN	22.5 x 130 mm	E5ZN		- Modular - Two channels per module - Replacement without rewiring	●		●	H&C		±0.5%	●		●			3	●			

*1 Position proportional = Valve control (relay up & down). *2 Profibus communication option via gateway for E5_N, E5_R, E5ZN, ask your local Omron representative. *3 P only. *4 2 PID is Omron's unique high-performance PID control. *5 Fuzzy PID available. *6 H = Heat, H/C = Heat or Cool, H&C = Heat and Cool.

Display	Supply voltage		Comms *2					Control output					Input type - linear			Input type - thermocouple												Input type - RTD			Approvals				
	110/220 VAC	24 VAC/VDC	RS232	RS485	Event IP	QLP port	DeviceNet	Relay	SSR	Voltage (pulse)	Linear voltage	Linear current	mA	mV	V	K	J	T	E	L	U	N	R	S	B	W	PLII	Pt100	JPt100	THE	CE	SP	UL	UL	
SV dial	●							●		●						●	●			●								●		●	●	●	●	●	●
Single 3 digit	●	○						●		●						●	●			●								●	●	●	●	●	●	●	●
Dual 4 digit	●	○	○	○	○	●		●		●		●	○	●		●	●	●	●	●	●	●	●	●	●	●		●	●		●	●	●	●	
Dual 4 digit	●	○	○	○	○	●		●		●		●	○	●		●	●	●	●	●	●	●	●	●	●	●		●	●		●	●	●	●	
Dual 4 digit colour change	●	○		○	○	●		●		●		●	●	●		●	●	●	●	●	●	●	●	●	●	●		●	●		●	●	●	●	
Dual 4 digit	●	○		○		●		●		●			○	●		●	●	●	●	●	●	●	●	●	●	●		●	●		●	●	●	●	
Dual 4 digit	●	○	○	○	○	●		●	●	●	●	●		●		●	●	●	●	●	●	●	●	●	●	●		●	●		●	●	●	●	
Dual 4 digit	●	○	○	○	○	●		●		●		●		●		●	●	●	●	●	●	●	●	●	●	●		●	●		●	●	●	●	
Dual 4 digit	●	○	○	○	○	●		●	●	●	●	●		●		●	●	●	●	●	●	●	●	●	●	●		●	●		●	●	●	●	
Dual 4 digit	●	○	○	○	○	●		●		●		●		●		●	●	●	●	●	●	●	●	●	●	●		●	●		●	●	●	●	
Triple 5 digit	●	○		○	●	●	○	●		●		●	●	●		●	●	●	●	●	●	●	●	●	●	●		●			●	●	●	●	
Triple 5 digit	●	○		○	●	●	○	●		●		●	●	●		●	●	●	●	●	●	●	●	●	●	●		●			●	●	●	●	
○ Dual 4 digit		●		●	●		○			●		●	○	●		●	●	●	●	●	●	●	●	●	●	●		●	●		●	●	●	●	

*7 Heater alarm = Heater burnout & SSR failure detection.

Standard
 Available
 Not available



E5C2



E5CS-X

E5C2 Temperature controllers

Input type		Ordering code	
K-type thermocouple	E5C2 -	[] []	K [] []
J-type thermocouple	E5C2 -	[] []	J [] []
L-type thermocouple (I-DIN type)	E5C2 -	[] []	L-D [] []
Platinum resistance thermometer (Pt100)	E5C2 -	[] []	P-D [] []
Thermistor (THE)	E5C2 -	[] []	G [] []

Control output		Relay	R
Voltage		Voltage	Q

Control method		ON-OFF control	20
P control		P control	40

Voltage		100-120 VAC	AC100120
200-240 VAC <td>AC200240 <td></td> </td>		AC200240 <td></td>	
24 VDC <td>DC24</td> <td></td>		DC24	

Temperature range		0 to 100 C	0-100	0-100
0 to 200 C		0-200	0-200	0-200
0 to 300 C		0-300	0-300	0-300
0 to 400 C		0-400	0-400	0-400
0 to 600 C		0-600		
0 to 800 C		0-800		
0 to 1,000 C		0-1000		
0 to 1,200 C		0-1200		
-50 to 50 C			-50-50	-50-50
-20 to 80 C			-20-80	
0 to 50 C			0-50	
50 to 150 C				50-150
100 to 200 C				100-200
150 to 300 C				150-300

Note: Call customer service for temperature range.

E5CS-X Temperature controllers

Model		Ordering code	
E5CS -		[] []	X

Control output		Relay	R
Voltage		Voltage	Q

Number of alarms		No alarm (STANDARD)	[]
1 alarm		1 alarm	1

Input type		Thermocouple K type or J type	KJ
Platinum resistance thermometer (Pt100)			P
Thermistor			G



E5AN



E5EN



E5CN



E5GN

E5_N Temperature controllers

		Ordering code									
Model	24 x 48 mm	E5GN -									
	48 x 48 mm	E5CN -					M			- 500	
	In-panel, DIN-rail mounted 48 x 48 mm	E5CN -						T		U	
	96 x 48 mm	E5EN -									
	96 x 96 mm	E5AN -		3			M			- 500	
		E5AN -		3			M			- 500	
Output type	Relay		R	R	R						
	Voltage (for driving SSR)		Q	Q	Q						
	Current		C	C							
	Hybrid relay		Y								
Number of alarms	No alarm (STANDARD)										
	One alarm			1							
	Two alarms			2							
	Three alarms			3							
Heater burnout alarm	Not available (STANDARD)										
	Available					H					
Option unit	Option unit can be mounted					M					
Communications	No communications function (STANDARD)										
	RS-485 & serial communications						03		FLK		
Input type	Thermocouple								TC		
	Platinum resistance thermometer (Pt100)								P		
	Temperature (thermocouple and Pt100)								T		
	Process (mA and V)								L		
Options	With terminal cover									- 500	
	DIN-rail mounted, in-panel type										U
Input voltage	100 to 240 VAC										AC100240
	24 VAC/VDC										ACDC24

Accessories for E5AN and E5EN

		Ordering code	
Option units	RS-232C communication	E53 - AK01	
	RS-485 communication	E53 - AK03	
	Event input	E53 - AKB	
Current transformer	5.8 dia. (0-50A)	E54 - CT1	
	12.0 dia. (0-12A)	E54 - CT3	
Terminal cover	2x included in E5AN, E5EN	E53 - COV11	

Accessories for E5CN

		Ordering code	
Option units	RS-485 and heater alarm	E53 - CNH03N	for relay and voltage output
	RS-485 communication	E53 - CN03N	for current output
	Event input and heater alarm	E53 - CNHBN	for relay and voltage output
	Event input	E53 - CNBN	for current output
	RS-485 and 3-phase heater alarm	E53 - CNHH03N	for relay and voltage output
	RS-485 and voltage output	E53 - CNQ03N	all types
Current transformer	5.8 dia. (0-50A)	E54 - CT1	
	12.0 dia. (0-12A)	E54 - CT3	
Terminal cover	Included in E5CN	E53 - COV10	

NOTE: The heater burnout alarm is available by mounting the E53-CN103 or E53-CN10B option on the E5CN. Heater burnout is not used with current output type.



E5AK



E5EK



E5CK



E5AKT



E5EK-T



E5CK-T

E5_K Temperature controllers

Ordering code

Model	48 x 48 mm, terminal cover	E5CK-	AA	1	- 500		
	96 x 48 mm, terminal cover	E5EK-		2	- 500		
	96 x 96 mm, terminal cover	E5AK-		2	- 500		

Constant values/program: Constant values (STANDARD) [] Program [T]

Model: Standard model [AA] Position proportional model [PRR]

Auxiliary outputs: 1 auxiliary output [1] 2 auxiliary outputs [2]

Inspection report: None (STANDARD) [] Inspection report [K]

Input voltage: 100 to 240 VAC [AC100240] 24 VAC/VDC [ACDC24]

Accessories for E5CK and E5CK-T

Option units		Ordering code
RS-232C		E53 - CK01
RS-485		E53 - CK03
Event input: 1 point		E53 - CKB
Transfer output (4 to 20 mA)		E53 - CKF
Terminal cover	Order separately	E53 - COV07
Output units	Relay/relay	E53 - R4R4
	Pulse (NPN)/relay	E53 - Q4R4
	Pulse (PNP)/relay	E53 - Q4HR4
	Linear (4 to 20 mA)/relay	E53 - C4R4
	Linear (0 to 20 mA)/relay	E53 - C4DR4
	Linear (0 to 10 V)/relay	E53 - V44R4
	Pulse (NPN)/pulse (NPN)	E53 - Q4Q4
	Pulse (PNP)/pulse (PNP)	E53 - Q4HQ4H

Accessories for E5EK/E5AK and E5EK-T/E5AK-T

		Ordering code
Output units	Relay	E53 - R
	SSR	E53 - S
	Pulse (NPN) 12 VDC	E53 - Q
	Pulse (NPN) 24 VDC	E53 - Q3
	Pulse (PNP) 24 VDC	E53 - Q4
	Linear (4 to 20 mA)	E53 - C3
	Linear (0 to 20 mA)	E53 - C3D
	Linear (0 to 10 V)	E53 - V34
	Linear (0 to 5 V)	E53 - V35
Option units	Event input	E53 - AKB
	Communication (RS-232C)	E53 - AK01
	Communication (RS-422)	E53 - AK02
	Communication (RS-485)	E53 - AK03
	Transfer output	E53 - AKF
Current transformer	5.8 dia. (0 to 50 A)	E54 - CT1
	12.0 dia. (0 to 120 A)	E54 - CT3
Terminal cover	E5AK	E53 - COV09
	E5EK	E53 - COV08

Note: Maximum 3 option units for E5AK, maximum 1 for E5EK.

E5_R Temperature controllers

		Ordering code																				
Model	96 x 48 mm, constant value	ESER -																				
	96 x 96 mm, constant value	ESAR -																				
Control method	Standard or heating/cooling control (STANDARD)																					
	Position proportional control	P																				
Output 1	DPST-NO relay outputs		R																			
	Pulse voltage and pulse voltage/current outputs		Q																			
	Current and current outputs		C																			
Output 2	None (STANDARD)																					
	Relay outputs		R																			
	Pulse voltage and pulse voltage/current outputs		Q																			
	Current and current outputs		C																			
Auxiliary outputs	None (STANDARD)																					
	4PST-NO relay output			4																		
	2 transistor outputs			T																		
Optional function 1	None (STANDARD)																					
	RS-485 communication																				3	
Optional function 2	None (STANDARD)																					
	4 event inputs																				D	
Input 1	Multi-input and 2 event inputs																				B	
	Multi-input and FB (potentiometer impedance)																				F	
	Multi-input and multi-input																				W	
Input 2	None (STANDARD)																					
	Multi-input and multi-input																				W	
Communication method	None (STANDARD)																					
	Compoway/F or MODBUS																				FLK	
	DeviceNet																				DRT	
Input voltage	100 to 240 VAC																					AC100240
	24 VAC/VDC																					ACDC24

Available E5_R Models

- ESER - Q 4 B
- ESER - Q 4 3 B - FLK 100-240AC
- ESER - Q T B - DRT
- ESER - Q T W - DRT
- ESER - Q T 3 D B - FLK 100-240AC
- ESER - Q T 3 D W - FLK
- ESER - Q C 4 3 B - FLK
- ESER - C 4 B
- ESER - C 4 3 B - FLK 100-240AC
- ESER - C T B - DRT
- ESER - C T W - DRT
- ESER - C T 3 D B - FLK 100-240AC
- ESER - C T 3 D W - FLK
- ESER - P R T F - DRT
- ESER - P R T D F
- ESER - P R Q 4 3 F - FLK
- ESAR - Q 4 3 B - FLK 100-240AC
- ESAR - Q 4 3 D B - FLK 100-240AC
- ESAR - Q 4 3 D W - FLK 100-240AC
- ESAR - Q 4 B - DRT
- ESAR - Q 4 B
- ESAR - Q Q 4 W - DRT
- ESAR - Q Q 4 3 D W - FLK
- ESAR - Q Q 4 3 D W W - FLK 100-240AC
- ESAR - Q C 4 B - DRT
- ESAR - Q C 4 3 D B - FLK
- ESAR - C 4 B
- ESAR - C 4 B - DRT
- ESAR - C 4 3 B - FLK 100-240AC
- ESAR - C 4 3 D B - FLK 100-240AC
- ESAR - C 4 3 D W - FLK 100-240AC
- ESAR - C C 4 W W - DRT
- ESAR - C C 4 3 D W W - FLK
- ESAR - P R 4 D F
- ESAR - P R Q 4 3 D F - FLK
- ESAR - P R 4 F - DRT
- ESAR - P R Q 4 F - DRT



ESER



ESER



E5ZN

E5ZN Temperature controllers		Ordering code	
Model	Two control points, RS-485, Compoway/F serial communications	E5ZN - 2	03 - FLK
Control output & options	Voltage output (for driving SSR) & heater burnout alarm	Q	H
	Transistor output & heater burnout alarm	T	H
	Current output & transfer output	C	F
Auxiliary output	Transistor (sourcing)	P	
	Transistor (sinking)	N	
Input type	Thermocouple	TC	
	Platinum resistance thermometer	P	

Accessories for E5ZN			
		Ordering code	
Terminal unit	18 terminals	E5ZN - SCT185 - 500	Extension socket
	24 terminals	E5ZN - SCT245 - 500	Master socket with power and communication terminals
Current transformer	5.8 dia. (0 to 50A)	E54 - CT1	
	12.0 dia. (0 to 120A)	E54 - CT3	
Setting display unit	24 VDC	E5ZN - SDL	Purchase sockets separately
Sockets for setting display unit	Front-connecting socket (with finger protection)	P2CF - 11 - E	Din-rail mounting
	Back-connecting socket	P3GA - 11	Panel mounting
	Terminal cover for finger protection	Y92A - 48G	For P3GA-11
Terminal cover	For SCT185-500 models	E53 - COV13	
	For SCT245-500 models	E53 - COV12	




Solid state relays

Omron's range of solid state relays is faster, more reliable and more cost-effective than any similar range on the market. There's an Omron solid state relay for almost every need, from heater control and motor control to interfacing and general applications that simply require high frequency, noiseless switching. What's more, these relays provide the perfect switching control for temperature controllers.











- Output current ranging from 2 to 150 A
- Replaceable, easy-to-install power device cartridges for ease of maintenance
- Zero cross AC load switching
- Built-in heat sinks
- For use in single- and three-phase applications
- Space saving design
- Operational indicator
- Built-in surge suppression
- Cycle control, AC input, voltage, short-circuit and failure detection modules available
- Conformance to all relevant standards

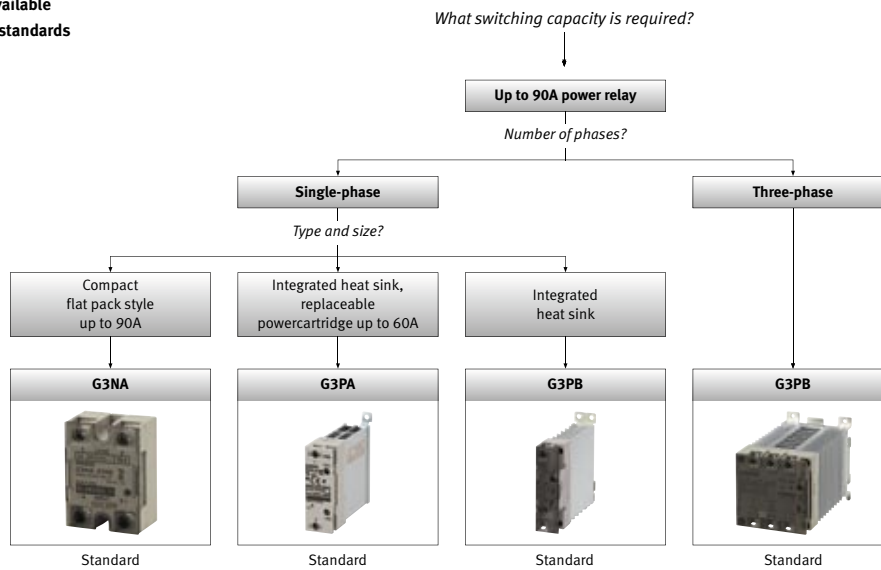Omron's range of solid state relays (SSRs) is the fastest, most reliable and most cost-effective on the market. There's an Omron SSR for almost every application, from heater and motor control to interfacing, that requires high frequency, noiseless switching.

What's more, these SSRs are ideal for use in combination with temperature controllers, for controlling heater bands for plastics extrusion processes, packaging machinery and heater elements in general manufacturing.



Solid state relays

Selection criteria											Load voltage/current [VAC]						Load voltage/current [VDC]				
Mounting	Application	Type of load	1-phase control	2-phase control	3-phase control	Function	Model		Max. current rating	Relay compatible	24 to 240	100 to 240	180 to 440	200 to 480	100/110	200/230	5 to 200	5 to 110	4 to 48	5 to 24	
Socket mounting type		Normal resistors Middle and long wave IR heater	●			Panel-mounted interfaces	G3B		5A	MK compatible		●									
			●			Heater control	G3PB		45A				●		●						
Control panel mounting type		Normal resistors Middle and long wave IR heater	●			Heater control, motor control	G3NA		50A			●					●				
			●			Heater control	G3PA		60A			●			●						
		Normal resistors		●	●	Heater control	G3PB		45A												
Power regulator		Normal resistors Middle and long wave IR heater Quartz heaters, short wave IR heater, elements made from siliconcarbide Normal resistive load With open delta connection	●			Heater control	G3PX		60A						●	●					

Input voltages [VDC or VAC]								Features										Mounting		Approvals						
5 VDC	12 VDC	24 VDC	5 to 24 VDC	12 to 24 VDC	24 VAC	100 to 120 VAC	200 to 240 VAC	Built-in heat sink	Zero-cross	Built-in varistor	LED operation indicator	Protective cover	3-phase loads via 3 single-phase SSRs	Replaceable power cartridge	Alarm output	Built-in failure detection	SSR open circuits detection	SSR short circuits detection	DIN-rail	Screw	CE	SE	UL US	UL	RU	VDE
			●								●								●	●	●		●		●	●
				●				●	●		●	●							●	●	●		●		●	●
			●			●	●		●	●	●	●	●	●					●	●	●	●	●	●	●	●
			●	●	●			●	●		●	●	●	●		●			●	●	●	●	●		●	●
				●				●	●	●	●	●	●						●	●	●		●		●	●
								●	●		●			●			●			●		●		●		●

Standard
 Available
 Not available



G3B



G3BD

G3B/BD Solid state relays		Ordering code				
Model	200V type, switches AC loads 100V type switches DC loads	G3B -	2	05	S	-VD DC5 - 24
		G3BD -	1	03	S	-VD DC5 - 24
Rated load power supply voltage	100 to 240 VAC 5 to 110 VDC		2 1			
Rated load current	3A 5A			03 05		
Terminal type	Plug-in terminals				S	
Certification	Certified by UL, CSA and TÜV					-VD
Rated input voltage (V)	5 to 24 VDC					DC5-24



G3PB

G3PB single-phase Solid state relays		Ordering code			
Model	100 to 240 VAC, screw terminal, single-phase models certified by UL, CSA and VDE, 12 to 24 VDC	G3PB - 2		B	-VDDC12 - 24
Rated load current	15A 25A 35A 45A		15 25 35 45		
Single phase type	Din-rail mounting and built-in heat sink				



G3NA

G3NA Solid state relays

		Ordering code			
Model	24 to 240 VAC	G3NA - 2	<input type="text"/>	B	<input type="text"/>
	24 to 240 VAC	G3NA - 2	<input type="text"/>	B	<input type="text"/>
	200 to 480 VAC	G3NA - 4	<input type="text"/>	B	<input type="text"/>
	200 to 480 VAC	G3NA - 4	<input type="text"/>	B	<input type="text"/>
	5 to 200 VDC	G3NA - D2	<input type="text"/>	B	<input type="text"/>
Rated output load (A)	5A	05	<input type="text"/>	<input type="text"/>	<input type="text"/>
	10A	10	10	10	<input type="text"/>
	20A	20	20	<input type="text"/>	<input type="text"/>
	40A	40	40	<input type="text"/>	<input type="text"/>
	50A	<input type="text"/>	50	<input type="text"/>	<input type="text"/>
	75A	75	<input type="text"/>	<input type="text"/>	<input type="text"/>
	90A	90	<input type="text"/>	<input type="text"/>	<input type="text"/>
	Rated input voltage (V)	5 to 24 VDC	DC5-24	DC5-24	<input type="text"/>
100 to 120 VAC		AC100-120	<input type="text"/>	<input type="text"/>	<input type="text"/>
100 to 240 VAC		<input type="text"/>	AC100-240	<input type="text"/>	<input type="text"/>
200 to 240 VAC		AC200-240	<input type="text"/>	<input type="text"/>	<input type="text"/>
		<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>



G3PA

G3PA Solid state relays

		Ordering code				
Model	200V, equipped with zero cross function, screw terminals, certified by UL, CSA and VDE	G3PA -	2	<input type="text"/>	B - VD	<input type="text"/>
	200V, not equipped with zero cross function, screw terminals, certified by UL, CSA and VDE	G3PA -	<input type="text"/>	<input type="text"/>	BL - VD	DC5 - 24
	400V, screw terminals, certified by UL, CSA and VDE	G3PA -	<input type="text"/>	<input type="text"/>	B - VD	DC12 - 24
Rated load power supply voltage	24 to 240 VAC	2	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
	180 to 400 VAC	4	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
	200 to 480 VAC	4	<input type="text"/>	<input type="text"/>	-2	<input type="text"/>
Rated load current	10A	10	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
	20A	20	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
	30A	30	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
	40A	40	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
	50A	50	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
	60A	60	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
Special functions	Standard models (STANDARD)	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
	480V Models	-2	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
Rated input voltage (V)	5 to 24 VDC	DC5-24	DC5-24	<input type="text"/>	<input type="text"/>	<input type="text"/>
	12 to 24 VDC	<input type="text"/>	DC12-24	<input type="text"/>	<input type="text"/>	<input type="text"/>
	24 VAC	AC24	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>



G3PB

G3PB three-phase Solid state relays

Ordering Code

Model Screw terminals, DIN-rail mounting and built-in heat sink certified by UL, CSA and VDE, 12 to 24 VDC G3PB - [] [] B - [] N - VDDC12-24

Rated load power supply voltage 100 to 240 VAC [] 2
200 to 480 VAC [] 5

Rated load current 15A [] 15
25A [] 25
35A [] 35
45A [] 45

Number of phases & elements 3-phase, 2-element models [] 2
3-phase, 3-element models [] 3



G3PX

G3PX Solid state relays

Ordering code

Model Simple model, 100/110 VAC and 200/230 VAC, single number of phases G3 PX - 2 [] [] E UN [] []
Function model, 100/110 VAC and 200/230 VAC, single number of phases G3 PX - 2 [] [] E [] - []

Rated load current 20A [] 20
40A [] 40
60A [] 60

Functions Simple models UN []
Single heater open circuit detection function H []
Multiple heater open circuit detection function HN []
Constant current function C []

CT unit type CT unit, 30cm length of wires CT03
CT unit, 100cm length of wires CT10

G3PX cartridge Solid state relays

Ordering code

Model Power device cartridge G32 X - A []

Rated load current 20A [] 20
40A [] 40
60A [] 60

Variable resistor Solid state relays

Ordering code

Model G32 X - []

Basic model name 3kΩ variable resistor [] V3K
2kΩ variable resistor [] V2K

CT unit Solid state relays

Ordering code

Model CT unit G32 X - CT [] []

Length of lead wires 30cm [] 03
100cm [] 10

Series Series for single heater open circuit detection for G3PX-2[]EH (STANDARD) []
Series for multiple heater op circuit detection for G3PX-2[]EH [] HN
Series for constant current for G3PX-2[]EC [] C



Digital panel indicators


Omron's digital panel indicator series accepts a wide range of input signals (process, temperature, pulse/impulse, weight, etc.), that can be displayed in any required value. The series also includes a green/red color change display feature, which clearly visualizes the status of a process.

- Multiple inputs, including process, temperature, frequency and many more!
- Highly visible display provides a clear, highly stable read-out of values
- Large, front-panel keys for unambiguous, user-friendly programming
- Dust-proof and waterproof front case that complies with NEMA4X (IP66 equivalent) standards
- Wide range of models with communication capability including DeviceNet







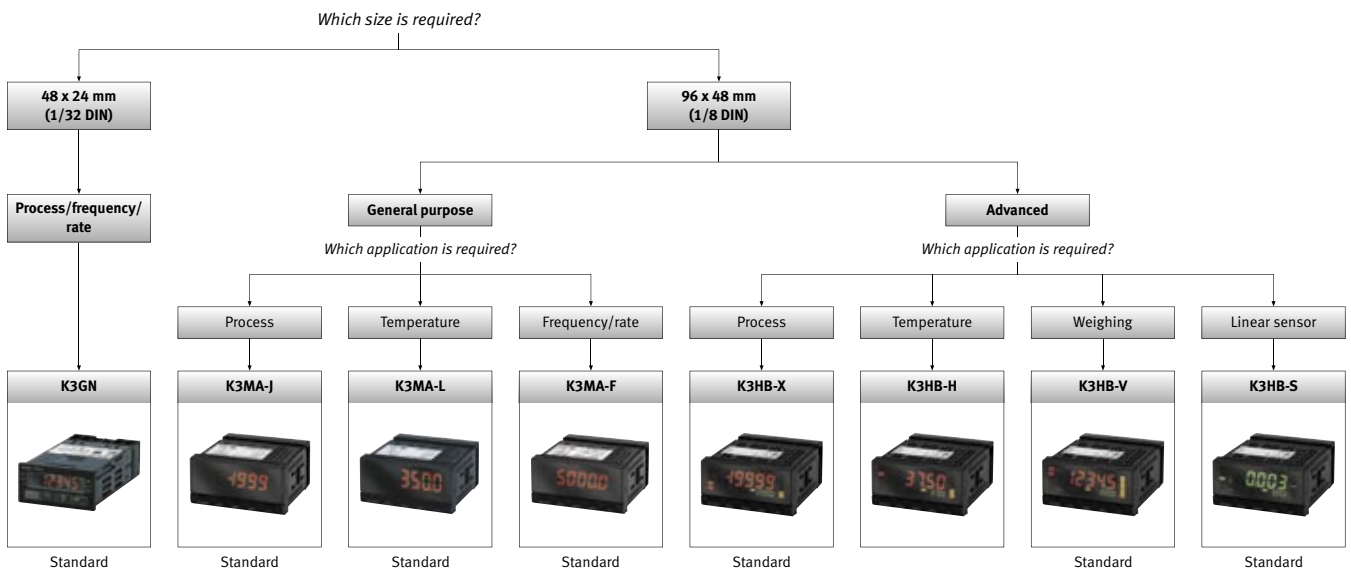




The K3MA is a basic indicator (1/8 DIN) that accepts process, temperature and frequency inputs with basic output functionality.

The K3GN (1/32 DIN) is a very compact multi-functional, five-digit indicator handling process, frequency and data inputs. Covering all basic functionality, it has a variety of outputs, including a communication (RS-485) output.

The K3HB is a modular, input indicator (1/8 DIN) featuring a unique bar-graph position indication and double display feature. It has a sampling speed of 20ms for the process/temperature/weight indicators, and 0.5ms for the linear sensor indicator.



Digital panel indicators

Selection criteria					Features														
Panel indicator type	Size	Family	Model	Key points	Color change display	Number of digits	Leading zero suppression	Forced zero function	Min/max hold function	Average processing	User selectable inputs	Start-up compensating time	Key protection	Decimal point position setting	Accuracy	Sample rate	Additional features	Sensor power supply	
Multifunctional digital panel indicator	1/32 DIN	K3GN	K3GN	 DC voltage/current input, frequency input	●	5	●	●	●	●	●	●	●	●	± 0.1% of full scale	4Hz	Remote/local processing, parameter initialisation, programmable output configuration, process value hold		
Process indicator	1/8 DIN	K3MA	K3MA-J	 DC voltage/current input	●	5	●	●	●	●	●		●	●	± 0.1% of full scale	4Hz	Teaching, comparative output pattern selection, parameter initialisation, programmable output configuration, process value hold		
Temperature indicator			K3MA-L	 Temperature meter	●	5	●	●	●	●	●		●	●	± 0.1% of full scale	0 to 30Hz or 0 to 5 kHz	Programmable output configuration, process value hold		
Frequency/rate indicator			K3MA-F	 Frequency/rate meter	●	5	●	●	●	●	●	●	●	●	●	± 0.1% of full scale	0 to 30Hz or 0 to 5 kHz	Teaching, comparative output pattern selection, programmable output configuration, process value hold	●
Process indicator		K3HB	K3HB-X	 DeviceNet, high-speed sampling (50Hz), bargraph	●	5	●	●	●	●	●			●	●	± 0.1% of full scale (DC voltage & DC current), ± 0.5% of full scale (AC voltage & AC current)	50Hz	Scaling, teaching, averaging, output hysteresis, output off delay, output test, bank selection, reset, comparative output	○
Temperature indicator			K3HB-H	 High-speed, high-precision, DeviceNet, high-resolution, bargraph	●	5	●	●	●	●	●			●	●	Thermocouple: ± 0.3% of full scale, Pt-100: ± 0.2% of full scale	50Hz	Scaling, teaching, averaging, output hysteresis, output off delay, output test, bank selection, reset, comparative output	○
Weighing indicator			K3HB-V	 DeviceNet, high-speed sampling (50Hz), bargraph, easy judgement for pressure, load, torque, weight	●	5	●	●	●	●	●			●	●	± 0.1% of full scale	50Hz	Scaling, teaching, averaging, output hysteresis, output off delay, output test, bank selection, reset, comparative output	○
Linear sensor indicator			K3HB-S	 High speed position indicator (2000Hz), DeviceNet, easy recognition & judgement, bargraph	●	5	●	●	●	●	●			●	●	One input: ± 0.1% of full scale Two inputs: ± 0.2% of full scale	2000Hz	Scaling, 2-input calculation, teaching, averaging, output hysteresis, output off delay, output test, bank selection, reset, comparative output	○
Up/down counting indicator		K3N	K3NC	 High-speed up/down counting (50 kHz), serial communication, models with only PV display & PV and SV display, 4 memory banks		5	●	●					●				Voltage pulse & open collector: 50 kHz; no-voltage contact: 30Hz	Scaling, variable linear output range, remote/local processing, counting value reset, security, memory power failure	●
Period indicator			K3NP	 50 kHz input range, serial communication, models with only PV display & PV and SV display, 4 memory banks		5	●	●					●				Voltage pulse & open collector: 50 kHz; no-voltage contact: 30Hz	Scaling, variable linear output, remote/local processing, max/min value data reset, comparative output pattern, time unit display, security, teaching	●
Frequency/rate indicator			K3NR	 50 kHz input range, intelligent interface modules with seven operating modes, single or dual input, serial communication, models with only PV display & PV and SV display, 4 memory banks		5	●	●					●				Voltage pulse & open collector: 50 kHz; no-voltage contact: 30Hz	Scaling, variable linear output, remote/local processing, max/min value data reset, comparative output pattern, process time for averaging measured values, time unit display, security, teaching	●

	Front protection		Inputs										Outputs					Comms	Approvals				
	IP grade	Supply voltage	NPN	PNP	Temperature	Contact	Voltage pulse	Load cell	DC voltage	DC current	AC voltage	AC current	Relay	NPN	PNP	Linear	BCD		CE	SP	UL US	FA US	
	IP66	24 VDC	●	●				●	●				●	●	●			●	●				
	IP66	24 VDC/AC or 100 to 240 VAC						●	●				●					●				●	
	IP66	24 VDC/AC or 100 to 240 VAC	●	●				●					●					●				●	
	IP66	24 VDC/AC or 100 to 240 VAC	●	●		●	●						●					●				●	
	IP66	100 to 240 VAC or 24 VAC/VDC	○	○				○	○	○	○	○	○	○	○	○	○	○	●				●
	IP66	100 to 240 VAC or 24 VAC/VDC	○	○	●								○	○	○	○	○	○	●				●
	IP66	100 to 240 VAC or 24 VAC/VDC	○	○				●	●				○	○	○	○	○	○	●				●
	IP66	100 to 240 VAC or 12 to 24 VAC/VDC	○	○		○	○						○	○	○	○	○	○	●	●	●		
	IP66	100 to 240 VAC or 12 to 24 VAC/VDC	○	○		○	○						○	○	○	○	○	○	●	●	●		
	IP66	100 to 240 VAC or 12 to 24 VAC/VDC	○	○		○	○						○	○	○	○	○	○	●	●	●		

Standard
 Available
 Not available



K3GN

K3GN Digital panel indicators		Ordering code	
Model	DC voltage/current, NPN	K3GN - ND	24VDC
	DC voltage/current, PNP	K3GN - PD	24VDC
Output type	2 relay contact outputs (SPST-NO)	C C	↑
	3 transistor outputs (NPN open collector)	T1	
	3 transistor outputs (PNP open collector)	T2	
Communication output type	Not supported (STANDARD)		↑
	RS-485	FLK	



K3MA-J



K3MA-L



K3MA-F

K3MA Digital panel indicators		Ordering code	
Model	Process meter, DC voltage/current	K3MA - J	
	Temperature meter, platinum resistant thermometer	K3MA - L	
	Frequency/rate meter, rotary pulse	K3MA - F	
Output type	No output (STANDARD)		↑
	2 relay contact outputs (SPST-NO)	A2	
	With relay contact output (SPDT)	C	
Supply voltage	100 to 240 VAC		↑
	24 VAC/VDC		
			100-240AC 24AC/DC



K3HB Digital panel indicators

Base units		Ordering code	
Temperature indicator	K3HB - H	TA	<input type="text"/>
Weighing indicator	K3HB - V	LC	<input type="text"/>
Linear sensor indicator	K3HB - S	SD	<input type="text"/>
Process indicator	K3HB - X		<input type="text"/>

Input sensor codes	Ordering code
Temperature input thermocouple/resistance thermometer input	TA
Load cell input (DC low-voltage input)	LC
DC voltage/current input	SD
DC voltage input	VD
DC current input	AD
AC voltage input	VA
AC current input	AA

Supply voltage	Ordering code
100 to 240 VAC	AC100-240
24 VAC/DC	AC/DC24

K3HB Digital panel indicators Sensor supply/output boards

Sensor power supply/output boards		Ordering code
		K33 - <input type="text"/>

Types	Ordering code
Relay output (PASS: SPDT) + sensor power supply (12 VDC +/- 5%, 80mA)	CPA
Relay output (PASS: SPDT) + sensor power supply (10 VDC +/- 5%, 100mA)	CPB
Linear current output (DC 0(4) - 20 mA) + sensor power supply (12 VDC +/- 10%, 80mA)	L1A
Linear current output (DC 0(4) - 20 mA) + sensor power supply (10 VDC +/- 5%, 100mA)	L1B
Linear voltage output (DC 0(1) - 5V, 0 to 10 V) + sensor power supply (12 VDC +/- 10%, 80mA)	L2A
Linear voltage output (DC 0(1) - 5V, 0 to 10 V) + sensor power supply (10 VDC +/- 5%, 100mA)	L2B
Sensor power supply (12 VDC +/- 10%, 80mA)	A
Sensor power supply (10 VDC +/- 5%, 100mA)	B
Communications (RS-232C) + sensor power supply (12 VDC +/- 10%, 80mA)	FLK1A
Communications (RS-232C) + sensor power supply (10 VDC +/- 5%, 100mA)	FLK1B
Communications (RS-485) + sensor power supply (12 VDC +/- 10%, 80mA)	FLK3A
Communications (RS-485) + sensor power supply (10 VDC +/- 5%, 100mA)	FLK3B

NOTES: CPA and CPB can be combined with relay outputs only.
Only one of the communications (BCD of DeviceNet) can be used by each indicator.

K3HB Digital panel indicators Relay/transistor output boards

Relay/transistor output boards		Ordering code
		K34 - <input type="text"/>

Types	Ordering code
Relay contact (H/L: SPDT each)	C1
Relay contact (HH/H/LL/L: SPST-NO each)	C2
Transistor (NPN open collector: HH/H/PASS/L/LL)	T1
Transistor (PNP open collector: HH/H/PASS/L/LL)	T2
DeviceNet	DRT

K3HB Digital panel indicators Event input boards

Event input boards		Ordering code
		K35 - <input type="text"/>

Types	Ordering code
5 points (M3 terminal blocks) NPN open collector	1
8 points (10-pin MIL connector) NPN open collector	2
5 points (M3 terminal blocks) PNP open collector	3
8 points (10-pin MIL connector) PNP open collector	4



K3NC

K3NC Digital panel indicators		Ordering code	
Model	Basic display type	K3NC -	<input type="text"/>
Input sensors	NPN inputs/voltage pulse inputs	NB	<input type="text"/>
	PNP inputs	PB	<input type="text"/>
Supply voltage	100 to 240 VAC	1	<input type="text"/>
	12 to 24 VDC	2	<input type="text"/>
Display	Basic	A	<input type="text"/>
	Set value LED display	C	<input type="text"/>

K3NC Digital panel indicators Counters		Ordering code	
Model	For basic display type	K31 -	<input type="text"/>
	For set value LED display type	K31 -	<input type="text"/>
Output type codes	5 comparative relay contact outputs (OUT1, 2, 4, 5; SPST-NO;OUT3; SPDT)	C2	<input type="text"/>
	5 comparative relay contact outputs (OUT1, 2, 4, 5; SPST-NC;OUT3; SPDT)	C5	<input type="text"/>
	5 comparative transistor outputs (NPN open collector)	T1	<input type="text"/>
	5 comparative transistor outputs (PNP open collector)	T2	<input type="text"/>
	BCD output (NPN open collector)	B2	<input type="text"/>
	BCD output + 5 transistor outputs (NPN open collector)	B4	<input type="text"/>
	Linear output (4 to 20 mA)	L1	<input type="text"/>
	Linear output (1 to 5 VDC)	L2	<input type="text"/>
	Linear output (1mV/10 digits)	L3	<input type="text"/>
	Linear output, 4 to 20 mA + 5 transistor outputs (NPN open collector)	L4	<input type="text"/>
	Linear output, 1 to 5 V + 5 transistor outputs (NPN open collector)	L5	<input type="text"/>
	Linear output, 1mV/10 digits + 5 transistor outputs (NPN open collector)	L6	<input type="text"/>
	Linear output, 0 to 5 VDC	L7	<input type="text"/>
	Linear output, 0 to 10 VDC	L8	<input type="text"/>
	Linear output, 0 to 5 VDC + 5 transistor outputs (NPN open collector)	L9	<input type="text"/>
	Linear output, 0 to 10 VDC + 5 transistor outputs (NPN open collector)	L10	<input type="text"/>
	Communication RS-232C	FLK1	<input type="text"/>
	Communication RS-485	FLK2	<input type="text"/>
	Communication RS-422	FLK3	<input type="text"/>
	RS-232C + 5 transistor outputs (NPN open collector)	FLK4	<input type="text"/>
	RS-485 + 5 transistor outputs (NPN open collector)	FLK5	<input type="text"/>
	RS-422 + 5 transistor outputs (NPN open collector)	FLK6	<input type="text"/>



K3NP

K3NP Digital panel indicators		Ordering code	
Model		K3NP -	<input type="text"/>
Input sensors	NPN inputs/voltage pulse inputs	NB	<input type="text"/>
	PNP inputs	PB	<input type="text"/>
Supply voltage	100 to 240 VAC	1	<input type="text"/>
	12 to 24 VDC	2	<input type="text"/>
Display	Basic	A	<input type="text"/>
	Set value LED display	C	<input type="text"/>

K3NP Digital panel indicators Timers

		Ordering code	
Model	For basic display type	K31 -	
	For set value LED display type	K31 -	
Output type codes	3 comparative relay contact outputs (H, PASS, L: SPDT)	C1	C1
	5 comparative relay contact outputs (HH, H, L, LL: SPSTNO; PASS: SPDT)	C2	C2
	5 comparative relay contact outputs (HH, H, L, LL: SPSTNC; PASS: SPDT)	C5	C5
	5 comparative transistor outputs (NPN open collector)	T1	T1
	5 comparative transistor outputs (PNP open collector)	T2	T2
	BCD output (NPN open collector)	B2	
	BCD output + 5 transistor outputs (NPN open collector)	B4	B4
	Linear output (4 to 20 mA)	L1	
	Linear output (1 to 5 VDC)	L2	
	Linear output (1mV/10 digits)	L3	
	Linear output, 4 to 20 mA + 5 transistor outputs (NPN open collector)	L4	L4
	Linear output, 1 to 5 V + 5 transistor outputs (NPN open collector)	L5	L5
	Linear output, 1mV/10 digits + 5 transistor outputs (NPN open collector)	L6	L6
	Linear output, 0 to 5 VDC	L7	
	Linear output, 0 to 10 VDC	L8	
	Linear output, 0 to 5 VDC + 5 transistor outputs (NPN open collector)	L9	L9
	Linear output, 0 to 10 VDC + 5 transistor outputs (NPN open collector)	L10	L10
	Communication RS-232C	FLK1	
	Communication RS-485	FLK2	
	Communication RS-422	FLK3	
	RS-232C + 5 transistor outputs (NPN open collector)	FLK4	FLK4
	RS-485 + 5 transistor outputs (NPN open collector)	FLK5	FLK5
	RS-422 + 5 transistor outputs (NPN open collector)	FLK6	FLK6

K3NR Digital panel indicators

		Ordering code	
Model	Basic display type	K3NR -	
Input sensors	NPN inputs/voltage pulse inputs	NB	
	PNP inputs	PB	
Supply voltage	100 to 240 VAC	1	
	12 to 24 VDC	2	
Display	Basic	A	
	Set value LED display	C	



K3NR Digital panel indicators Counters

		Ordering code	
Model	For basic display type	K31 -	
	For set value LED display type	K31 -	
Output type codes	3 comparative relay contact outputs (H, PASS, L: SPDT)	C1	C1
	5 comparative relay contact outputs (HH, H, L, LL: SPSTNO; PASS: SPDT)	C2	C2
	5 comparative relay contact outputs (HH, H, L, LL: SPSTNC; PASS: SPDT)	C5	C5
	5 comparative transistor outputs (NPN open collector)	T1	T1
	5 comparative transistor outputs (PNP open collector)	T2	T2
	BCD output (NPN open collector)	B2	
	BCD output + 5 transistor outputs (NPN open collector)	B4	B4
	Linear output (4 to 20 mA)	L1	
	Linear output (1 to 5 VDC)	L2	
	Linear output (1mV/10 digits)	L3	
	Linear output, 4 to 20 mA + 5 transistor outputs (NPN open collector)	L4	L4
	Linear output, 1 to 5 V + 5 transistor outputs (NPN open collector)	L5	L5
	Linear output, 1mV/10 digits + 5 transistor outputs (NPN open collector)	L6	L6
	Linear output, 0 to 5 VDC	L7	
	Linear output, 0 to 10 VDC	L8	
	Linear output, 0 to 5 VDC + 5 transistor outputs (NPN open collector)	L9	L9
	Linear output, 0 to 10 VDC + 5 transistor outputs (NPN open collector)	L10	L10
	Communication RS-232C	FLK1	
	Communication RS-485	FLK2	
	Communication RS-422	FLK3	
	RS-232C + 5 transistor outputs (NPN open collector)	FLK4	FLK4
	RS-485 + 5 transistor outputs (NPN open collector)	FLK5	FLK5
	RS-422 + 5 transistor outputs (NPN open collector)	FLK6	FLK6



Power supplies


Omron's power supplies combine innovative features with high performance, high reliability and compact designs, making them ideal for modern industrial control panels where space is often at a premium.

- AC voltages switchable from 85 to 264 VAC
- DC output voltages: 5, 12 or 24 VDC
- Variety of outputs up to 600W
- Under-voltage detection
- Displays for preventive maintenance (S8VS)
 - diagnostics of output
 - remaining life of power supply
 - run-time monitor
- Parallel operation with BUS connectors possible up to four blocks (240W; S8TS)
- DC back-up options
 - buffer unit; up to 1s at 1A back-up time
 - back-up unit with battery; up to 4 min. at 8A back-up time
- Multi-voltage outputs configurable (S8TS)
- DIN-rail mounting





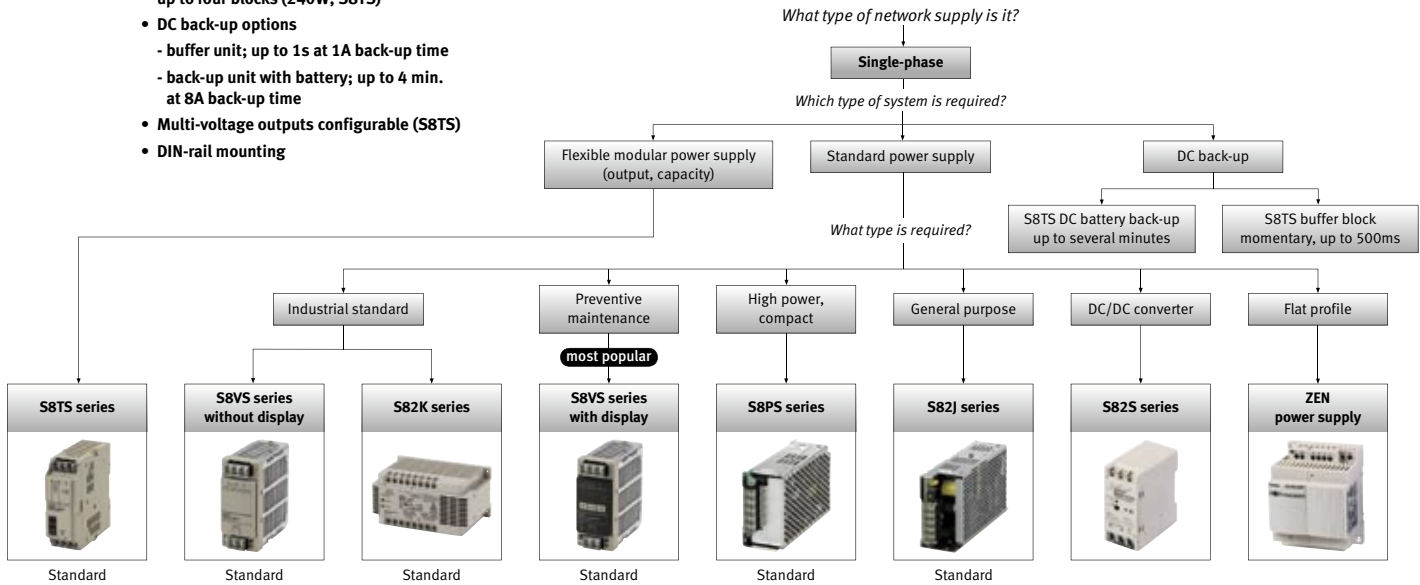


The S8TS features a unique 'building-block' concept and can be plugged together to give a power supply capacity of 60 to 240 W for standard operation.

The ultra-compact S8VS model features a unique 3-digit, 7-segment LED display for output voltage, output current and output peak current for faster, easier diagnostics. The S8VS is available in a variety of power ratings from 60 to 240 W (15/30W models released).

The S8T-DCBU-02 buffer unit is designed to ensure the supply of power in your systems for Omron's following power supplies: S8TS, S8VS, S82J, S82K, S8PS.



Power supplies

Selection criteria						Power [W]																			Features							
Phases	Rated voltage	Category	Family		Key points	Voltage	3W	7.5W	10W	15W	25W	30W	50W	60W	90W	100W	120W	150W	180W	240W	300W	480W	600W	960W	PFC built-in/conforms to EN61000-3-2 A14							
Single-phase	100/230 VAC or 100...240 VAC	Modular	S8TS		- 60 to 240 W - Multi-power supply configurations - Modular: just one model	5V					● 5A															●						
						12V					● 2.5A	● 5A	● 7.5A		● 10A															●		
						24V										● 2.5A				● 5A	● 7.5A	● 10A									●	
		Back-up	S8VS-Bx/Ax		- Momentary power back-up	24V										● 2.5A																
						24V																										
		With status monitor	S8VS-Bx/Ax		Display features: - Output status monitor - Run time monitor - Maintenance forecast monitor - Ultra compact size	24V										● 2.5A	● 3.75A		● 5A		● 7.5A	● 10A							●			
						24V																										●
		Industrial standard	S8VS		- Ultra compact size	24V											● 2.5A	● 3.75A		● 5A		● 7.5A	● 10A						●			
						5V	● 0.6A	● 1.5A		● 2.5A	● 5A																				○	
						12V	● 0.25A	● 0.6A		● 1.2A	● 2.5A																					○
	15V					● 0.2A	● 0.5A																								○	
	Compact	S8PS		- Open-frame and covered types - Most compact up to 600W	5V												● 10A												●			
					12V												● 4.2A													●		
					24V												● 2.1A		● 4.5A		● 6.5A				● 14A	● 27A				●		
					5V			● 2A	● 5A	● 10A	● 20A																					
	General purpose	S8J		- Compact & economical - Open frame, cover type and enclosed type	12V			● 1A	● 2.1A	● 4.2A	● 8.5A																					
					15V			● 0.7A	● 1.7A			● 7A																				
					24V			● 0.5A	● 1.1A	● 2.1A		● 4.5A	● 6.5A		● 14A	● 27A																
					5V	● 0.6A	● 1.5A																									
	12 - 24 VDC	DC/DC converter	S82S		- Ideal for applications with limited space - Wide input voltage ranges: 10.2 to 27.6 VDC - Dual output type available	5V	● 0.6A	● 1.5A																								
12V						● 0.25A	● 0.6A																									
15V						● 0.2A	● 0.5A																									
24V						● 0.13A	● 0.3A																									

Note. A low-profile power supply is available, see more in detail.

													Approvals						
													CE	SF	UL US	D'E	UL US	UL	UL
DC back-up	Capacitor back-up	Undervoltage detection	Overtoltage protection	Overload protection	DIN-rail mounting	Screw mounting (with bracket)	Class B	Class 2	N+1 redundancy	Parallel operation	Series operation	Based on EMC & LVD	CSA22.2-14	UL508	EN50178 (VDE0160)/EN60950 (VDE0806)	UL1310, UL60950 (UL1950), CSA22.2-14, CSA22.2-60950	UL508	UL1310, UL60950	
	○		●	●	●	●	●	●	●	●	●	●			●	●			
	○		●	●	●	●	●	●	●	●	●	●			●	●			
	○	○	●	●	●	●	●	●	●	●	●	●			●	●			
		●	●	●	●	●	●	●	●	●	●	●			●	●	UL1604/CSA213		
	○		●	●	●	●		● Only 60W model			●	●			●	●	●	●	
	○		●	●	●	●		● Only 60W model			●	●			●	●	●	●	
			●	●	●	●	●	●				●	●		●	●		●	●
			●	●	●	●	●	●				●	●		●	●		●	●
			●	●	●	●	●	●				●	●		●	●		●	●
	○	○	● Only 240W model	●	●	●	●	●		● Only 100/240W models	● Only 90/100/240W models	●	●		●	●		●	●
			●	●	●	●	●	●			● Only 50W model	●	●		●	●		●	●
			●	●	●	●	●	●			● Only 50W model	●	●		●	●		●	●
	○		●	●	●	●	●	●		● Only 300/600W models	●	●	●		●	●		●	●
			● Only 100W model	●	●	●	●	● Except 10/25W models			● Except 10/25W models	●	●		●	●		●	●
			●	●	●	●	●	●			● Except 10/25W models	●	●		●	●		●	●
			●	●	●	●	●	●			● Except 10/25W models	●	●		●	●		●	●
	○		● Only 100/300/600W models	●	●	●	●	● Except 300/600W models	●	● Only 50W model	● Only 300/600W models	●	●		●	●		●	●
			●	●	●	●	●	●				●	●		●	●		●	●
			●	●	●	●	●	●				●	●		●	●		●	●
			●	●	●	●	●	●				●	●		●	●		●	●

Standard
 Available
 Not available



S8TS



S8VS-Bx/Ax



S8VS



S82K

S8TS Power supplies			
Ordering code			
Model	25W 5V 5A	S8TS - 02505	<input type="checkbox"/>
	30W 12V 2.5A	S8TS - 03012	<input type="checkbox"/>
	60W 24V 2.5A	S8TS - 06024	<input type="checkbox"/>
Terminals	Connector terminals	F	<input type="checkbox"/>
Bus line connectors	Basic block only (STANDARD)		<input type="checkbox"/>
	S8T-BUS01 and S8T-BUS02 included*1	E1	<input type="checkbox"/>
*1 Not for 5V models.			

Accessories: S8TS bus line connector			
Ordering code			
AC line+ DC line bus (parallel operation)	S8TS-BUS	<input type="checkbox"/>	1
AC line bus (series or isolated operation)	S8TS-BUS	<input type="checkbox"/>	2
Quantity	Single connector	0	<input type="checkbox"/>
	10 connectors	1	<input type="checkbox"/>

S8VS Power supplies			
Ordering code			
Model	60W, 24V	S8VS - 060	24 <input type="checkbox"/>
	90W, 120W, 180W, 240W, 24V	S8VS -	24 <input type="checkbox"/>
Capacity	90W	090	<input type="checkbox"/>
	120W	120	<input type="checkbox"/>
	180W	180	<input type="checkbox"/>
	240W	240	<input type="checkbox"/>
Configuration	No display		<input type="checkbox"/>
	With maintenance forecast monitor		A <input type="checkbox"/>
	With total run-time monitor		B <input type="checkbox"/>
	With maintenance forecast monitor and undervoltage alarm (sinking)		AP <input type="checkbox"/>
	With total run-time monitor and undervoltage alarm (sinking)		B <input type="checkbox"/>
	With maintenance forecast monitor and undervoltage alarm (sourcing)		BP <input type="checkbox"/>
	With total run-time monitor and undervoltage alarm (sourcing)		BP <input type="checkbox"/>

New - No Display

S8VS 15W and 30W			
Ordering code			
Model	15W	S8VS - 015	- <input type="checkbox"/>
	30W	S8VS - 030	- <input type="checkbox"/>
Output voltage	5V	05	<input type="checkbox"/>
	12V	12	<input type="checkbox"/>
	24V	24	<input type="checkbox"/>

S82K Power supplies			
Ordering code			
Model	3W	S82K -	003 <input type="checkbox"/>
	7.5W	S82K -	007 <input type="checkbox"/>
	15W	S82K -	015 <input type="checkbox"/>
	30W	S82K -	030 <input type="checkbox"/>
	50W	S82K -	050 24 <input type="checkbox"/>
	90W	S82K -	090 24 <input type="checkbox"/>
	100W	S82K -	100 24 <input type="checkbox"/>
Power factor correction	No		<input type="checkbox"/>
	Yes	P	<input type="checkbox"/>
Output voltage	+5 VDC	05	05 <input type="checkbox"/>
	+12 VDC	12	12 <input type="checkbox"/>
	+15 VDC	15	15 <input type="checkbox"/>
	+24 VDC	24	24 <input type="checkbox"/>
	12 VDC	27	<input type="checkbox"/>
	15 VDC	28	<input type="checkbox"/>
Undervoltage alarm indicator/output	No		<input type="checkbox"/>



S8PS

S8PS Power supplies			
		Ordering code	
Model	50W	S8PS - 050	<input type="checkbox"/>
	100W	S8PS - 100	24 <input type="checkbox"/>
	150W	S8PS - 150	24 <input type="checkbox"/>
	300W	S8PS - 300	24 <input type="checkbox"/>
	600W	S8PS - 600	24 C <input type="checkbox"/>
Output voltage	5V	05	<input type="checkbox"/>
	12V	12	<input type="checkbox"/>
	24V	24	<input type="checkbox"/>
Configuration	Open-frame type with front-mounting bracket	<input type="checkbox"/>	<input type="checkbox"/>
	Covered type with front-mounting bracket	C	C
	Open-frame type with DIN-rail mounting bracket	D	<input type="checkbox"/>
	Covered type with DIN-rail mounting bracket	CD	CD



S82J

S82J Power supplies			
		Ordering code	
Model	10W	S82J - 010	<input type="checkbox"/>
	25W	S82J - 025	<input type="checkbox"/>
	50W	S82J - 050	<input type="checkbox"/>
	100W	S82J - 100	<input type="checkbox"/> *1
	150W	S82J - 150	24 <input type="checkbox"/>
	300W	S82J - 300	24 <input type="checkbox"/>
	600W	S82J - 600	24 <input type="checkbox"/>
Output voltage	5V	05	05 <input type="checkbox"/>
	12V	12	12 <input type="checkbox"/>
	15V	15	15 <input type="checkbox"/>
	24V	24	24 <input type="checkbox"/>
Configuration	Enclosed type, front terminals with mounting bracket	<input type="checkbox"/>	<input type="checkbox"/>
	Open-frame type, front terminals	A	A <input type="checkbox"/>
	Covered type, front terminals	D	D <input type="checkbox"/>
Mounting bracket	Front-mounting bracket type	<input type="checkbox"/>	<input type="checkbox"/>
	DIN-rail mounting bracket type	D	<input type="checkbox"/>

*1 Top terminals (B&D) and connector type (C&F) not for 24V type.



S82S

S82S Power supplies			
		Ordering code	
Model	3W 12 to 24 VDC	S82S - 73	<input type="checkbox"/>
	7.5W 12 to 24 VDC	S82S - 77	<input type="checkbox"/>
Output voltage	5V	05	05 <input type="checkbox"/>
	12V	12	12 <input type="checkbox"/>
	15V	15	15 <input type="checkbox"/>
	24V	24	24 <input type="checkbox"/>
	±12V	27	<input type="checkbox"/>
	±15V	28	<input type="checkbox"/>



Sockets

Omron is the first manufacturer to use SLC technology in a standard socket for plug-in electromechanical relays, level controllers, solid-state relays and timers. User benefits include reduced wiring time compared with screw terminals, and constant wire clamp pressure that eliminates the need to re-tighten terminals.

- Unique release lever ensures easy product replacement
- Different gauge wires to be connected to the same terminal
- Standard DIN-rail connection for faster, easier panel building
- Safe terminal arrangement; coil terminals separated from contact terminals
- Environmentally friendly; no Pb, Cd or Be used

When used in combination with associated products these sockets guarantee safe switching and meet the most demanding specifications. Double wiring and easy bridge and branch connections are all possible on all terminals. And because each

socket is wired from the top instead of the side, the cable troughs can be mounted directly at the socket, saving space in the switch cabinet. In addition, a unique ejector in each socket makes product replacement very easy.



Standard



P2RF-S



P2RF08

Standard



PTF08A

Standard



PYF

Standard



PYF08-S

Standard



PYF14-S

Standard

Sockets

Selection criteria						Product group						
Mounting	Terminals	Hold down clip	Poles	Model	Color	Relays						
						MY	G2RS	LY	MK1/S	MYK		
Front mounting (DIN-rail)	Screw-less clamp	Without clips	1	P2RF-05-S	Grey		●					
			2	P2RF-08-S	Grey		●					
			2	PYF08A-S	Grey	●						
			4	PYF14-A-S	Grey	●						
Front-mounting (DIN-rail/screw)	Screw terminal	With external clip	1 or 2	PTF08A-E	Black			●				
			1 or 2	PTF08A	Black			●				
			2	PF083A	Black					●		
			2	PF083A-E	Black						●	
			2	PYF08A	Black	●						
			3	PYF11A	Black	●						
			3	PF113A	Black						●	
			3	PF113A-E	Black						●	
			3	PTF11A	Black							
			4	PTF14A	Black						●	
	4	PTF14A-E	Black						●			
	4	PYF14A-E	Black	●						●		
	4	PYF14A-N	Grey	●						●		
	2	PYF08A-E	Black	●								
	2	PYF08A-N	Grey	●								
	4	PYF14A	Black	●						●		
	1	P2RF-05	Black				●					
	2	P2RF-05-E	Grey					●				
	Back mounting	Solder terminals	With external clip	2	P2CF-08	Black						
				2	P2CF-08-E	Black						
2				P2RF-08	Black				●			
2				P2RF-08-E	Grey				●			
2				P3G-08	Black							
With integral clip		3	P2CF-11	Black								
		3	P2CF-11-E	Black								
		3	P3GA-11	Black								
		2	PL08	Black								
		3	PL11	Black								
Plug-in/solder	With external clip	2	PY08-Y1	Black	●							
		3	PY11-Y1	Black	●							
		4	PY14-Y1	Black	●							
		1	P2R-05A	Black				●				
		2	P2R-08A	Black				●				
PCB terminals	With external clip	1 or 2	PT08	Black				●				
		3	PT11	Black				●				
		4	PT14	Black					●			
		1 or 2	PT08-0	Black					●			
		2	PY08-02	Black	●							
	With integral clip	3	PY11-02	Black	●							
		3	PT11-0	Black					●			
		4	PT14-0	Black					●			
		4	PY14-02	Black	●					●		
		1	P2R-05P	Black					●			
Wire-wrap	With external clip	1	P2R-057P	Grey				●				
		2	P2R-08P	Black				●				
		2	P2R-087P	Grey				●				
		1 or 2	PT08QN	Black					●			
		3	PT11QN	Black					●			
	With integral clip	4	PT14QN	Black					●			
		2	PY08QN	Black	●							
		2	PY08QN2	Black	●							
		3	PY11QN	Black	●							
		3	PY11QN2	Black	●							
Wire-wrap	With integral clip	4	PY14QN	Black	●					●		
		4	PY14QN2	Black	●					●		
		2	PY08QN2-Y1	Black	●							
		2	PY08QN-Y1	Black	●							
		3	PY11QN-Y1	Black	●							
3	PY11QN2-Y1	Black	●									
4	PY14QN2-Y1	Black	●									
4	PY14QN-Y1	Black	●									

	Timers						Counters		Level			Solid state relays						Temperature controllers		Feature	Approvals							
	H3YN	H3RN	H3CR	H5CR	H5CX	H2C	H7CX	H7CR	K7L	61F	E7L	G3B	G3BD	G3F	G3FD	G3R-I	G3R-O	G3H	G3HD	E5C2	E5Zn	Finger safe	CE	RoHS	UL	UL95	LR	

Standard
 Available
 Not available

Warranty

CERTAIN TERMS AND CONDITIONS OF SALE

1. **Offer; Acceptance.** These terms and conditions (these "Terms") are deemed part of all catalogs, manuals or other documents, whether electronic or in writing, relating to the sale of goods or services (collectively, the "Goods") by Omron Electronics LLC and its subsidiary companies ("Seller"). Seller hereby objects to any terms or conditions proposed in Buyer's purchase order or other documents which are inconsistent with, or in addition to, these Terms. Please contact your Omron representative to confirm any additional terms for sales from your Omron company.
2. **Prices.** All prices stated are current, subject to change without notice by Seller. Buyer agrees to pay the price in effect at time of shipment.
3. **Discounts.** Cash discounts, if any, will apply only on the net amount of invoices sent to Buyer after deducting transportation taxes and duties, and will be allowed only if (i) the invoice is paid according to Seller's payment terms and (ii) Buyer has no past due amounts owing to Seller.
4. **Orders.** Seller will accept no order less than \$200 net billing.
5. **Governmental Approvals.** Buyer shall be responsible for, and shall bear all costs involved in, obtaining any government approvals required for the importation or sale of the Goods.
6. **Taxes.** All taxes, duties and other governmental charges (other than general real property and income taxes), including any interest or penalties thereon, imposed directly or indirectly on Seller or required to be collected directly or indirectly by Seller for the manufacture, production, sale, delivery, importation, consumption or use of the Goods sold hereunder (including customs duties and sales, excise, use, turnover and license taxes) shall be charged to and remitted by Buyer to Seller.
7. **Financial.** If the financial position of Buyer at any time becomes unsatisfactory to Seller, Seller reserves the right to stop shipments or require satisfactory security or payment in advance. If Buyer fails to make payment or otherwise comply with these Terms or any related agreement, Seller may (without liability and in addition to other remedies) cancel any unshipped portion of Goods sold hereunder and stop any Goods in transit until Buyer pays all amounts, including amounts payable hereunder, whether or not then due, which are owing to it by Buyer. Buyer shall in any event remain liable for all unpaid accounts.
8. **Cancellation; Etc.** Orders are not subject to rescheduling or cancellation unless Buyer indemnifies Seller fully against all costs or expenses arising in connection therewith.
9. **Force Majeure.** Seller shall not be liable for any delay or failure in delivery resulting from causes beyond its control, including earthquakes, fires, floods, strikes or other labor disputes, shortage of labor or materials, accidents to machinery, acts of sabotage, riots, or lack of transportation or the requirements of any government authority.
10. **Shipping; Delivery.** Unless otherwise expressly agreed in writing by Seller:
 - a. Shipments shall be by a carrier selected by Seller.
 - b. Such carrier shall act as the agent of Buyer and delivery to such carrier shall constitute delivery to Buyer.
 - c. All sales and shipments of Goods shall be FOB shipping point (unless otherwise stated in writing by Seller), at which point title to and all risk of loss of the Goods shall pass from Seller to Buyer, provided that Seller shall retain a security interest in the Goods until the full purchase price is paid by Buyer.
 - d. Delivery and shipping dates are estimates only.
 - e. Seller will package Goods as it deems proper for protection against normal handling and extra charges apply to special conditions.
11. **Claims.** Any claim by Buyer against Seller for shortage or damage to the Goods occurring before delivery to the carrier must be presented in writing to Seller within 30 days of receipt of shipment and include the original transportation bill signed by the carrier noting that the carrier received the Goods from Seller in the condition claimed.

12. **Warranties.** (a) **Exclusive Warranty.** Seller's exclusive warranty is that the Goods will be free from defects in materials and workmanship for a period of twelve months from the date of sale by Seller (or such other period expressed in writing by Seller). Seller disclaims all other warranties, express or implied. (b) **Limitations.** SELLER MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, ABOUT NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OF THE GOODS. BUYER ACKNOWLEDGES THAT IT ALONE HAS DETERMINED THAT THE GOODS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE. Seller further disclaims all warranties and responsibility of any type for claims or expenses based on infringement by the Goods or otherwise of any intellectual property right. (c) **Buyer Remedy.** Seller's sole obligation hereunder shall be to replace (in the form originally shipped with Buyer responsible for labor charges for removal or replacement thereof) the non-complying Good or, at Seller's election, to repay or credit Buyer an amount equal to the purchase price of the Good; provided that in no event shall Seller be responsible for warranty, repair, indemnity or any other claims or expenses regarding the Goods unless Seller's analysis confirms that the Goods were properly handled, stored, installed and maintained and not subject to contamination, abuse, misuse or inappropriate modification. Return of any goods by Buyer must be approved in writing by Seller before shipment. Seller shall not be liable for the suitability or unsuitability or the results from the use of Goods in combination with any electrical or electronic components, circuits, system assemblies or any other materials or substances or environments. Any advice, recommendations or information given orally or in writing, are not to be construed as an amendment or addition to the above warranty.
13. **Damage Limits; Etc.** SELLER SHALL NOT BE LIABLE FOR SPECIAL, INDIRECT OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR PRODUCTION OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE GOODS, WHETHER SUCH CLAIM IS BASED IN CONTRACT, WARRANTY, NEGLIGENCE OR STRICT LIABILITY. Further, in no event shall liability of Seller exceed the individual price of the Good on which liability is asserted.
14. **Indemnities.** Buyer shall indemnify and hold harmless Seller, its affiliates and its employees from and against all liabilities, losses, claims, costs and expenses (including attorney's fees and expenses) related to any claim, investigation, litigation or proceeding (whether or not Seller is a party) which arises or is alleged to arise from Buyer's acts or omissions under these Terms or in any way with respect to the Goods. Without limiting the foregoing, Buyer (at its own expense) shall indemnify and hold harmless Seller and defend or settle any action brought against Seller to the extent that it is based on a claim that any Good made to Buyer specifications infringed intellectual property rights of another party.
15. **Property; Confidentiality.** The intellectual property embodied in the Goods is the exclusive property of Seller and its affiliates and Buyer shall not attempt to duplicate it in any way without the written permission of Seller. Notwithstanding any charges to Buyer for engineering or tooling, all engineering and tooling shall remain the exclusive property of Seller. All information and materials supplied by Seller to Buyer relating to the Goods are confidential and proprietary, and Buyer shall limit distribution thereof to its trusted employees and strictly prevent disclosure to any third party.
16. **Miscellaneous.** (a) **Waiver.** No failure or delay by Seller in exercising any right and no course of dealing between Buyer and Seller shall operate as a waiver of rights by Seller. (b) **Assignment.** Buyer may not assign its rights hereunder without Seller's written consent. (c) **Amendment.** These Terms constitute the entire agreement between Buyer and Seller relating to the Goods, and no provision may be changed or waived unless in writing signed by the parties. (d) **Severability.** If any provision hereof is rendered ineffective or invalid, such provision shall not invalidate any other provision. (e) **Setoff.** Buyer shall have no right to set off any amounts against the amount owing in respect of this invoice. (f) As used herein, "including" means "including without limitation".

CERTAIN PRECAUTIONS ON SPECIFICATIONS AND USE

1. **Suitability of Use.** Seller shall not be responsible for conformity with any standards, codes or regulations which apply to the combination of the Good in the Buyer's application or use of the Good. At Buyer's request, Seller will provide applicable third party certification documents identifying ratings and limitations of use which apply to the Good. This information by itself is not sufficient for a complete determination of the suitability of the Good in combination with the end product, machine, system, or other application or use. The following are some examples of applications for which particular attention must be given. This is not intended to be an exhaustive list of all possible uses of this Good, nor is it intended to imply that the uses listed may be suitable for this Good:
 - (i) Outdoor use, uses involving potential chemical contamination or electrical interference, or conditions or uses not described in this document.
 - (ii) Energy control systems, combustion systems, railroad systems, aviation systems, medical equipment, amusement machines, vehicles, safety equipment, and installations subject to separate industry or government regulations.
 - (iii) Systems, machines and equipment that could present a risk to life or property. Please know and observe all prohibitions of use applicable to this Good.NEVER USE THE PRODUCT FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE SELLER'S PRODUCT IS PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.
2. **Programmable Products.** Seller shall not be responsible for the user's programming of a programmable Good, or any consequence thereof.
3. **Performance Data.** Performance data given in this catalog is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of Seller's test conditions, and the user must correlate it to actual application requirements. Actual performance is subject to the Seller's Warranty and Limitations of Liability.
4. **Change in Specifications.** Product specifications and accessories may be changed at any time based on improvements and other reasons. It is our practice to change part numbers when published ratings or features are changed, or when significant construction changes are made. However, some specifications of the Good may be changed without any notice. When in doubt, special part numbers may be assigned to fix or establish key specifications for your application. Please consult with your Seller's representative at any time to confirm actual specifications of purchased Good.
5. **Errors and Omissions.** The information in this catalog has been carefully checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical or proofreading errors, or omissions.

Standard Stock Item

Omron defines "Standard Stock" as items that are available in inventory under normal business conditions. While we make every effort to maintain adequate stock, if a product experiences a sudden increase in customer demand, availability may be impacted.



OMRON ELECTRONICS LLC
Schaumburg, IL
www.omron.com/oei

OMRON CANADA, INC.
Toronto, Ontario
www.omron.ca

BRLIZOPICDOEI 1.05
© 2005 OMRON ELECTRONICS LLC
Printed in the U.S.A.

United States Regional Sales Office
847.843.7900

For US technical support or other inquiries:
800.556.6766

Canada Regional Sales Office
416.286.6465

Mexico Regional Sales Office

Florida
954.227.2121
Mexico, D.F.
555.534.1195
Ciudad Juarez
656.623.7083
Monterrey, N.L.
818.377.4281

Brazil Regional Sales Office
55.11.5564.6488

Argentina Regional Sales Office - Cono Sur
54.114.787.1129

Onron On-Line

Global
<http://www.omron.com>

USA
<http://www.omron.com/oei>

Canada
<http://www.omron.ca>

Authorized Distributor: