


0.1" Spacing T.H. with 0.05" offset (201-0001-01)-Top Side




0.1" Spacing T.H. with 0.05" offset (201-0001-01)-Bottom Side

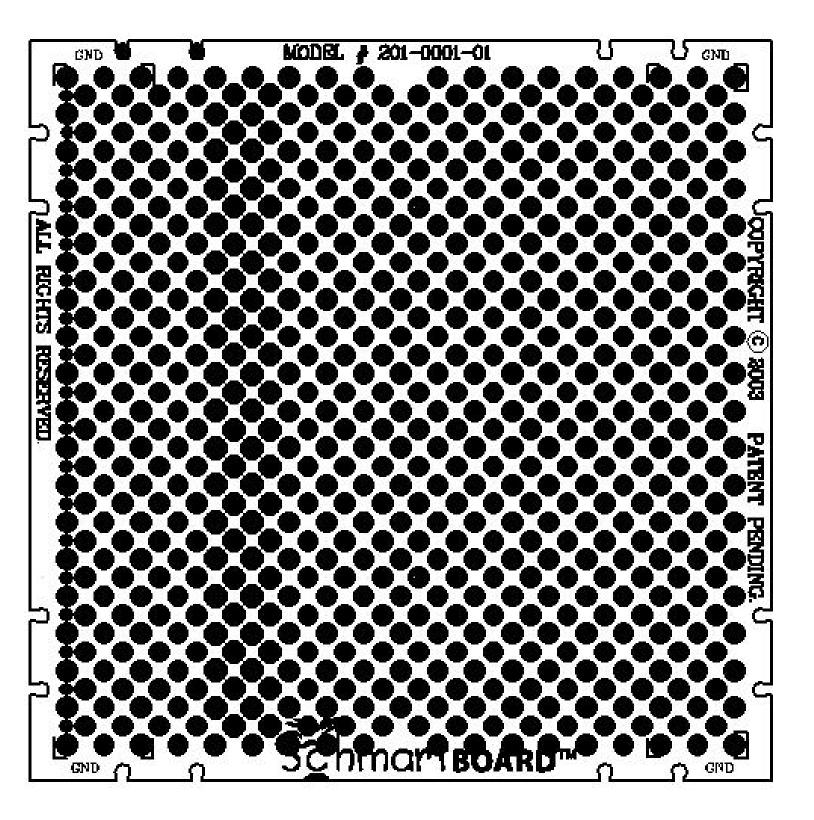

Time seved - SchmartBoard (Sb) Money seved - Schmarzenderd(Sb) Timesaved - Money seved -Excellent BOI(a) - 8=SD ×SD



201-0001-01 T.H. 0.1" SPACING WITH 0.05" OFFSET, 2" X 2" GRID

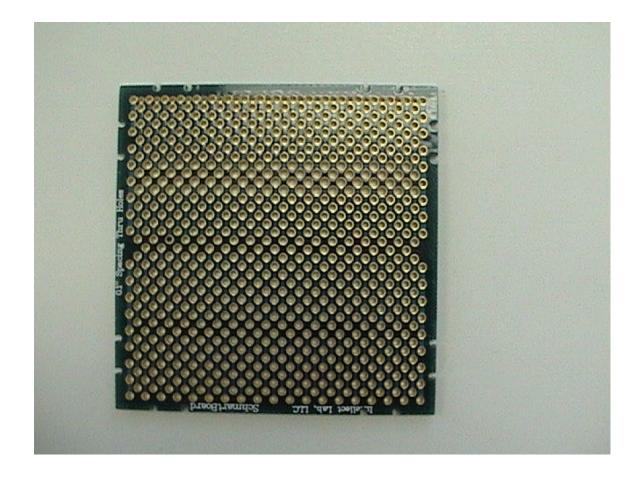

- ??100% support of the through-hole components with the 0.1" spacing pitch.
- ??12 ground holes are connected a copper plane on the bottom side.
- ??Components such as capacitor, resistor, diode, inductor, crystal, headers, jumpers, fuse, transistors, voltage regulators, DIP IC 70 pins or sockets, DIP switches, relay, RJ11, RJ45 connector...etc. are supported.

Copyright? 2003 SchmartBOARD