

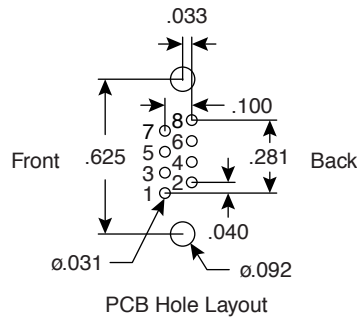




# PCB Modular Jack

## 154-7641PCB



PCB Modular Jack



Dimensions: In.

SPECIFICATIONS	
Type:	8P8C modular phone w/PCB leads
Housing:	PBT added 15% glass fiber
Color:	gray
Western Electric type:	641PCB
USOC type:	RJ45
Contact:	6 $\mu$ gold plated phosphor bronze alloy
Insulation resistance:	500M $\Omega$ min.
Contact resistance:	10m $\Omega$ max. per contact
Dielectric withstanding voltage:	1000V RMS 60Hz
Current rating:	1.5A
Insertion force:	900g
Retention strength:	5kgs between jack and plug

Date Last Revised: 10-15-05

Available from Mouser Electronics  
1-800-346-6873  
www.mouser.com

KC-300627

154-7641PCB