



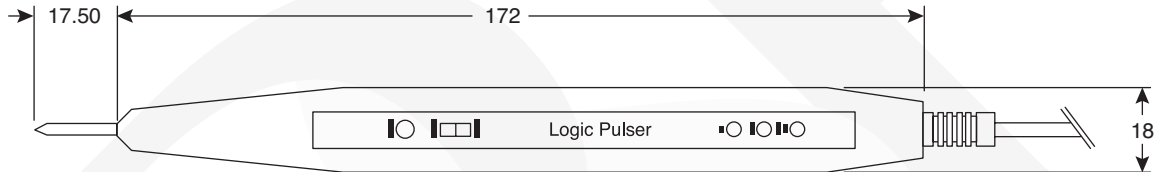

## Logic Pulser

PSP-110030

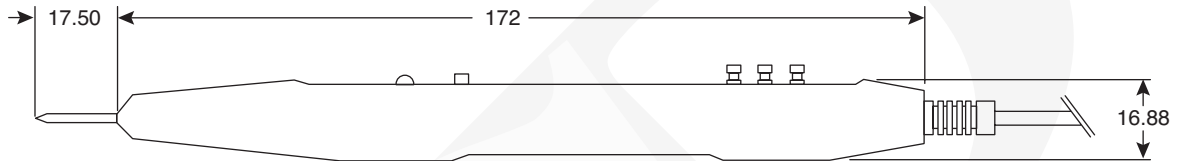

Dimensions: mm

### Specifications :

- Tests TTL, DTL, RTL, HTL, CMOS, and MOS
- Produces 10  $\mu$ sec pulse signal
- Maximum allowable supply voltage:  $\pm 25$  V
- Operating voltage range: +3 V to + 18 V
- Maximum output allowable connection voltage:  $\pm 25$  V
- Maximum sync input voltage:  $\pm 120$  V/15 sec
- Sync Input impedance: 100 k $\Omega$  minimum
- Pulse repetition rate: 0.5 Hz/500 Hz
- Pulse width at pulser output pin: 10  $\mu$ sec typical, 100 mA load
- Output current:
  - Pulse mode: 100 mA sink/source
  - 50% pulse mode: 4 mA sink/source
- Power supply protection:  $\pm 25$  V/15 sec

Updated: 9-12-07

383-LP20110

Available from Mouser Electronics

1-800-346-6873

www.mouser.com

Specifications are subject to change without notice. No liability or warranty implied by this information. Environmental compliance based on producer documentation.