



STRIP MATERIAL NUMBER	FINISH
84525-0009	SELECTIVE TIN 100μ INCH MINIMUM OVER NICKEL 80μ INCH MINIMUM OVERALL (C)
84525-0032	SELECTIVE HARD GOLD 30μ INCH MINIMUM WITH SELECTIVE TIN 100μ INCH MINIMUM OVER NICKEL 50μ INCH MINIMUM OVERALL (C)

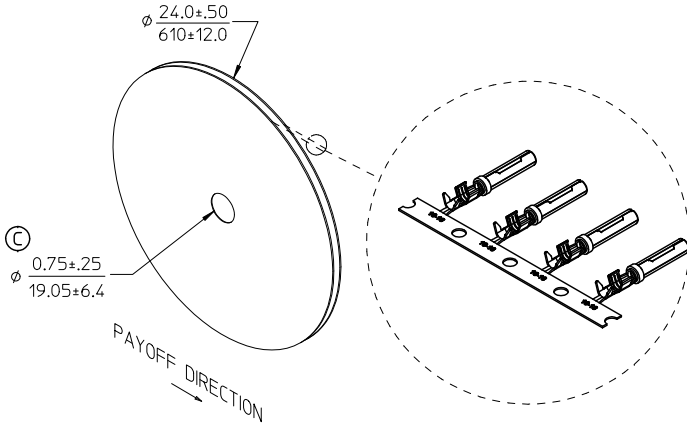

WIRE INSULATION O.D. RANGE  $\frac{.055-.085}{1.40-2.16}$

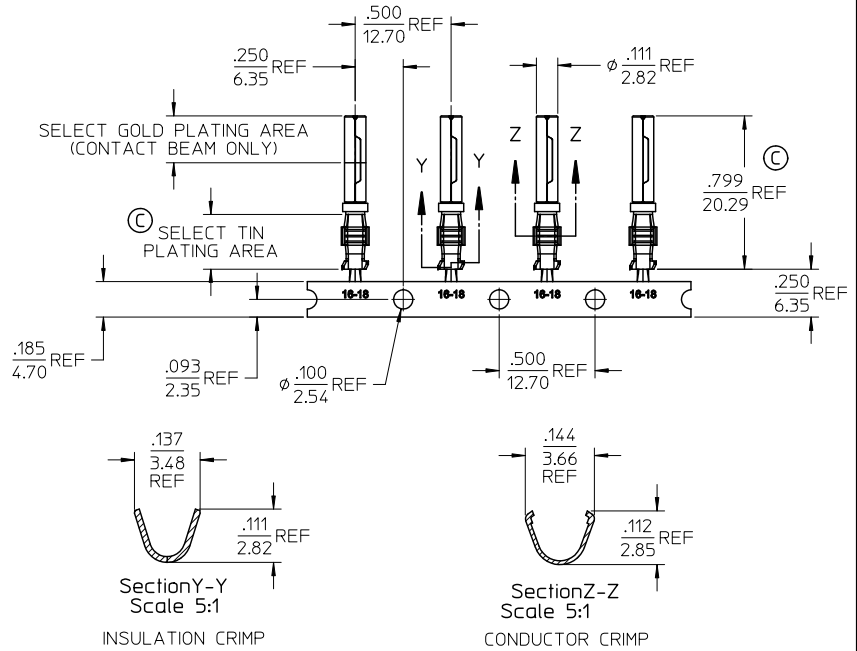

NOTES:

1. TERMINAL MATERIAL: COPPER ALLOY, .0118/0.300 THICK. FINISH: SEE CHART.
2. HOOD MATERIAL: STAINLESS STEEL, .006/0.15 THICK.
3. STRIP PARTS ARE REELED 3000 PARTS PER REEL AS SHOWN ABOVE.
4. TERMINAL FOR USE WITH SERIES XRC CONNECTOR ASSEMBLIES.
5. ALL MATERIALS AND FINISHES ARE ROHS COMPLIANT.

UPDATE DIMS & FINISHES EC NO: WNA2010-0604 DRAWING/ENG: 2010/05/26 CHKD: [blank] APPR: DTITUS 2010/12/06	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED) 4 PLACES ± --- ± --- 3 PLACES ± --- ± .005 2 PLACES ± .13 ± --- 1 PLACE ± --- ± --- ANGULAR ± ---° DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION	
			IN/MM	2:1	INCH		
				DRAWN BY	DATE	TITLE	
				MODELL	2009/03/25	XRC SOCKET W/SNAP WINDOW	
			CHECKED BY	DATE			
			RDEROSS	2009/03/25			
			APPROVED BY	DATE			
			DTITUS	2010/12/06			
			MATERIAL NO.	DOCUMENT NO.		SHEET NO.	
			SEE CHART	SD-84525-001		1 OF 1	
			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				