

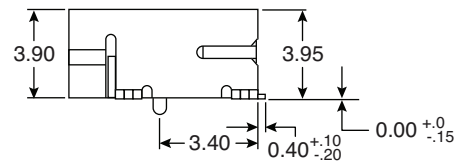
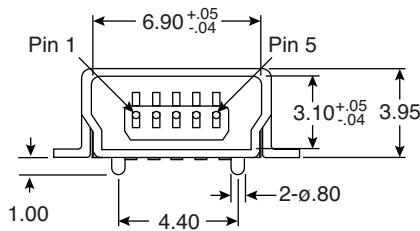
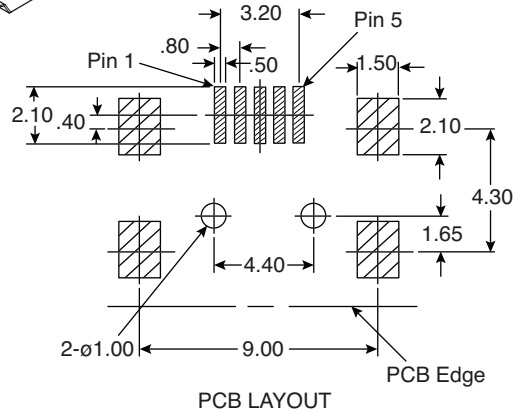


Mini USB B Type Receptacle

154-15300-E



Mini USB B Type Receptacle



Dimensions: mm

ELECTRICAL SPECIFICATIONS	
Current Rating:	1.0A AC/DC
Voltage Rating:	5V AC/DC
Contact Resistance:	50mΩ Max.
Insulation Resistance:	100MΩ Min.
Dielectric Withstanding Voltage:	500V AC/Minute

MATERIAL SPECIFICATIONS	
Housing:	High Temp Plastic, UL94V-0, Black
Terminal:	Copper Alloy
Terminal Plating:	Gold on Contact and tin on solder all over nickel
Shell:	Steel
Shell Plating:	Gold or tin on all over nickel
Mylar:	Polyimide
RoHS Compliant	

Date Last Revised: 3/10/09

Available from Mouser Electronics
1-800-346-6873 / www.mouser.com

KC-301258

Specifications are subject to change without notice. No liability or warranty implied by this information. Environmental compliance based on producer documentation.

154-15300-E