

## Features

- Two resistance-matched PTCs in a ceramic housing
- Aids compliance with:
  - ITU-T K.20/21/45
  - Telcordia GR-1089-CORE
  - UL 60950, 3rd Ed.
- Narrow resistance tolerance
- RoHS compliant\*

## Applications

Used as a secondary overcurrent protection device in:

- Customer Premise Equipment (CPE)
- Central Office (CO)
- Access equipment

# CMF-RD Series - Telecom CPTC Resettable Fuses

## Electrical Characteristics

| Model       | Induction Voltage Withstand | Rated Voltage | Rated Resistance (RN) |           | Resistance Matching In Housing | Hold Current | Hold Current | Trip Current | I <sub>max</sub> @ 230 VAC | Time to Trip @ I <sub>max</sub> /230 VAC |
|-------------|-----------------------------|---------------|-----------------------|-----------|--------------------------------|--------------|--------------|--------------|----------------------------|------------------------------------------|
|             | VAC                         | Volts         | Ohms                  | Tolerance | Ohms                           | Amps @ 25 °C | Amps @ 40 °C | Amps @ 25 °C | Amps                       | Seconds                                  |
| CMF-RD50    | 600                         | 230           | 50                    | ±20 %     | ± 0.5                          | 0.09         | 0.06         | 0.19         | 3.0                        | < 0.1                                    |
| CMF-RD50-10 | 600                         | 230           | 50                    | ±10 %     | ± 0.5                          | 0.09         | 0.06         | 0.19         | 3.0                        | < 0.1                                    |

## Test Procedures And Requirements For Model CMF-RD Series


| Test                                   | Primary Protection | Test Condition                                           | Requirements*        |
|----------------------------------------|--------------------|----------------------------------------------------------|----------------------|
| Mains Power Contact - ITU-T K.20, K.21 | None               | 230 V rms, 10 ohms, 15 Min.                              | (Ri-Rf) / Ri < ±10 % |
| Power Induction - ITU-T K.20, K.21     | None               | 600V rms, 600 ohms, 0.2 seconds, 10 cycles, every 1 Min. | (Ri-Rf) / Ri < ±10 % |
| Power Induction - ITU-T K.20, K.21     | GDT                | 600 V rms, 600 ohms, 1 second, 10 cycles, every 1 Min.   | (Ri-Rf) / Ri < ±10 % |
| Power Induction - ITU-T K.20, K.21     | GDT                | 600 V rms, 200 ohms, 1 second, 10 cycles, every 1 Min.   | (Ri-Rf) / Ri < ±10 % |
| Lightning Surge - ITU-T K.20, K.21     |                    | 10/700 μs, 25 ohms, 1.0 kV, 10 Tests, every 1 Min.       | (Ri-Rf) / Ri < ±10 % |
| Lightning Surge                        |                    | 10/1000 μs, 40 ohms, 1.0 kV, 30 Tests, every 3 Min.      | (Ri-Rf) / Ri < ±10 % |
| Overvoltage Withstand                  |                    | 300 V, 3 A, 4 Hours, 1 Time                              | (Ri-Rf) / Ri < ±10 % |
| Failure Mode                           |                    | 300 V, RL=0, 60 Min.                                     | **                   |

Ri = R initial

Rf = R final

\*\* Circuit disconnected or high resistance is acceptable.

## Product Dimensions

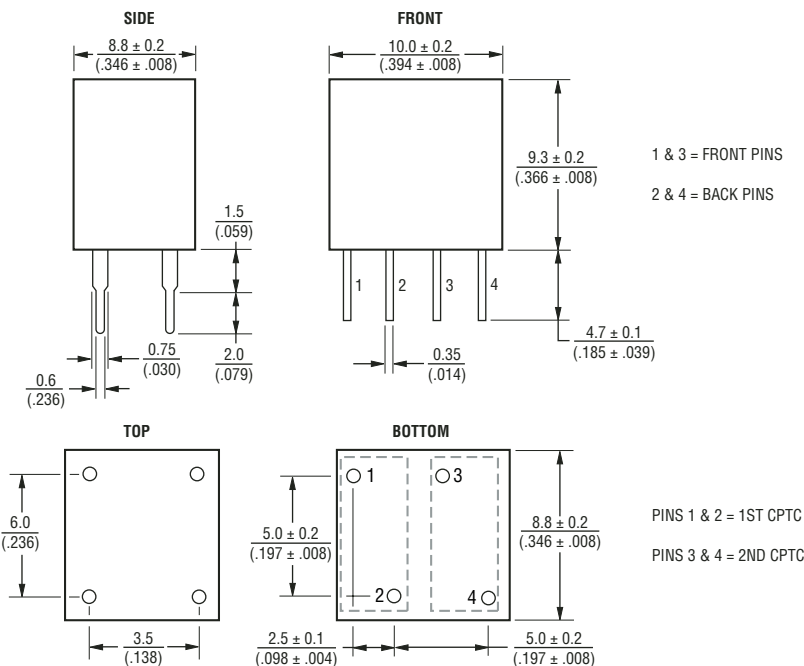


Packaging options: BULK: 96 pcs. per plastic box


DIMENSIONS =  $\frac{\text{MM}}{(\text{INCHES})}$

## Typical Part Marking

Represents total content. Layout may vary.

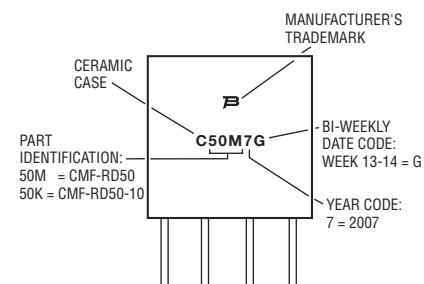

## How to Order

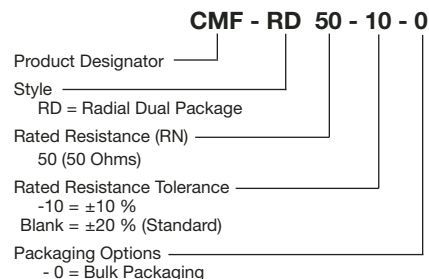

\*RoHS Directive 2002/95/EC Jan 27 2003 including Annex. Specifications are subject to change without notice. Customers should verify actual device performance in their specific applications.



**Asia-Pacific:**

Tel: +886-2 2562-4117 • Fax: +886-2 2562-4116

**Europe:**

Tel: +41-41 768 5555 • Fax: +41-41 768 5510

**The Americas:**

Tel: +1-951 781-5500 • Fax: +1-951 781-5700

[www.bourns.com](http://www.bourns.com)